ALIMAK SCANDO 450

Construction hoists with flexible, modular design



Access anytime, anywhere









Please contact Bigge Crane and Rigging Co. at 888-337-BIGGE or email info@bigge.com for further information.

Intelligent control

The microprocessor-based Alimak Lift Control system ALC-II reduces waiting times substantially and solves your site logistic problems.

Superior comfort

Frequency control provides very smooth starting and stopping with low starting current and less wear and tear.

Flexible modular design

The hoist car design is truly modular and offers several optional lengths and multiple door and ramp choices.

Economical

Reduced cost for fleet owners and rental companies due to flexibility, durability, and accessibility, leading to low cost of ownership. Fuse ratings from 20 A for low energy consumption.

BİGGE

ALIMAK SCANDO 450

Low power consumption and low cost of ownership

The Alimak Scando 450 is a total upgrade of the Alimak CH construction hoist range first launched in 1998. A modernization program encompassing new technology further strengthens the light and medium range construction hoists. The Alimak Scando 450 offers improved comfort with greater productivity and accessibility. Fuse ratings from 20 A result in low energy consumption.

Alimak Scando 450 is a construction hoist for passengers and materials. It offers flexibility, efficiency, safety, low energy consumption and low cost of ownership making it the ultimate choice for both construction and rental companies.

Accessibility is improved by a modern microprocessor based control system, ALC II, which can solve many site logistic problems. For example, the system reduces waiting times by storing all calls from the landings and sending the hoist car that is logistically nearest to a landing to pick up cargo or passengers.

Alimak Scando 450 can be equipped with a frequency control unit (FC), with closed-loop, which gives very smooth starting and stopping with low starting current and less wear and tear.

The Alimak Scando 450 can be used in single or dual car configurations. Alimak Scando 450 can also share the mast of the Hek medium range modular system. This unique advantage improves utilization of accessories and increases the access capability in a cost-effective way. The hoist car design is truly modular and offers several optional car lengths between 2.0 and 3.2 m and a multiple choice of doors or ramps.

When choosing an Alimak range hoist, you also choose access to a long, genuine experience of complex vertical access requirements from many different parts of the world. To Alimak Hek, no applications are too difficult to solve. Adding the facts that our hoists have a very long lifetime, high quality and low cycle cost makes it easy to choose an Alimak hoist.








ALIMAK SCANDO 450

Main characteristics

- Attractive design and excellent comfort
- Single and dual car configurations
- Modular car design with extensions and multiple door and ramp options
- ALC-II collective control system with group control and internal fault diagnostics system
- Stainless steel electrical cabinet inside the car, integrated into the wall
- Optional dual entrance at base landing level
- Durable materials: high quality steel for increased strength and weight reduction. Car walls and door cladding of perforated steel sheeting, with hot dip galvanized steel mast sections. All stainless steel electrical cabinets and landing control boxes
- Wide range of optional equipment and functions
- Remote Monitoring System A³, can be added

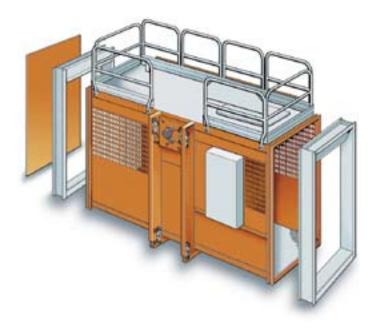

TECHNICAL SPECIFICATIONS

Up to 2,000 kg
0–54 m/min.
150 m
1.4 m
2.0–3.2 m
2.13 m
Frequency control or direct-on-line
1 or 2
GF
380–500 V, 50 or 60 Hz, 3 phase
From 20 A
450, tubular steel with integrated rack
1.508 m
70 kg
5

*Increased lifting height on request. The maximum lifting height on Alimak Scando 450 with 1-motor drive is 100 m.

www.alimakhek.com

Alimak Hek AB is ISO 9001 Certified

Pictures are illustrative only and do not ne





This information is for reference use only. Operators manual should be consulted and adhered to. Please contact Bigge Crane and Rigging Co. at 888-337-BIGGE or email info@bigge.com for further information.

sarily show the configuration of products on the market at a given point in time. Products must be used in conformity with safe practice and applicable

