


LINDEN COMANSA

LINDEN 2100


21 LC 400


26,450 lbs.

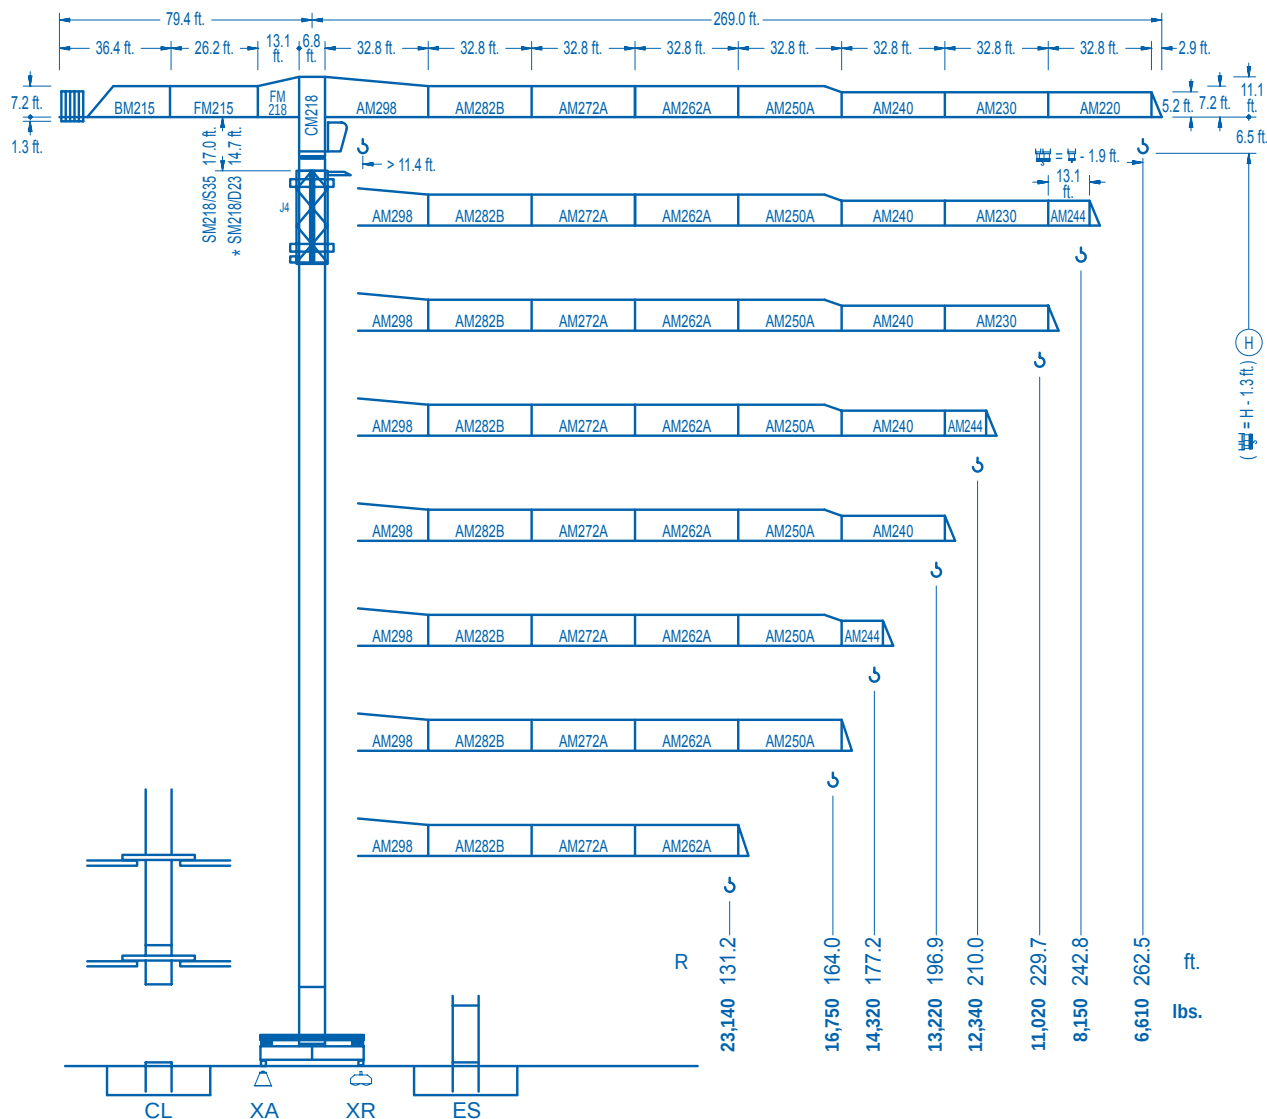

CE EN 14439 (C/25)


R (ft.)																	
262.5	77.4 26,450	82.0 24,720	98.4 19,940	111.5 17,160	121.4 15,480	137.8 13,220	144.0 13,220	164.0 11,430	177.2 10,470	196.9 9,280	210.0 8,600	229.7 7,740	242.8 7,260	262.5 6,610	ft. lbs.		
242.8		84.3 26,450	98.4 22,040	111.5 19,000	121.4 17,170	131.2 15,610	150.3 13,220	158.8 13,220	177.2 11,700	196.9 10,380	210.0 9,640	229.7 8,690	242.8 8,150	ft. lbs.			
229.7			101.7 26,450	111.5 23,730	121.4 21,500	131.2 19,620	144.4 17,510	164.0 15,010	181.8 13,220	195.2 13,220	210.0 12,190	229.7 11,020	ft. lbs.				
210.0			102.0 26,450	111.5 23,880	121.4 21,640	131.2 19,750	144.4 17,630	164.0 15,110	182.7 13,220	197.5 13,220	210.0 12,340	ft. lbs.					
196.9			105.6 26,450	111.5 24,830	121.4 22,510	131.2 20,560	144.4 18,380	164.0 15,770	189.0 13,220	196.9 13,220	ft. lbs.						
177.2			104.0 26,450	111.5 24,430	121.4 22,150	131.2 20,220	144.4 18,070	164.0 15,500	177.2 14,320	ft. lbs.							
164.0			109.6 26,450	111.5 25,900	121.4 23,500	131.2 21,470	144.4 19,200	164.0 16,750	ft. lbs.								
131.2				114.8 26,450	121.4 24,840	131.2 23,140	ft. lbs.										






DS.1003.05 01/10

Reserva de modificaciones. Subject to modifications. Modifications réservées. Konstruktionsänderungen vorbehalten.

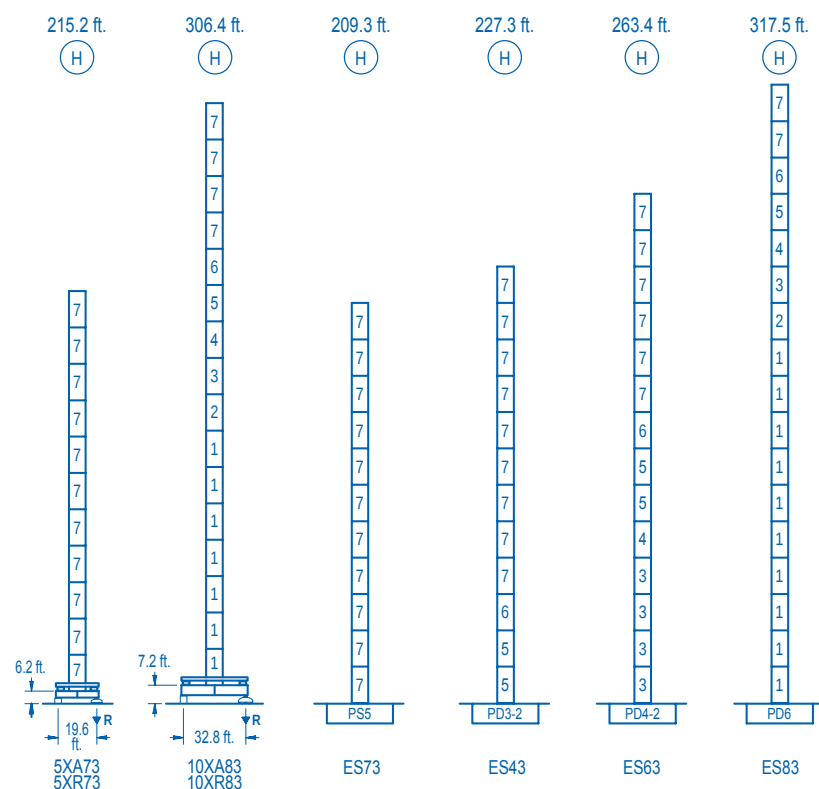

nº	Ref.	h (ft.)	h (m)
1	D36	8.2	18.0
2	TD36A	8.2	18.0
3	D34	8.2	18.0
4	TD34	8.2	18.0
5	D33	8.2	18.0
6	TD33A	8.2	18.0
7	S35	8.2	18.0
8	D23	6.6	18.0
9	D23A	6.6	18.0
10	CLD23A	6.6	10.2

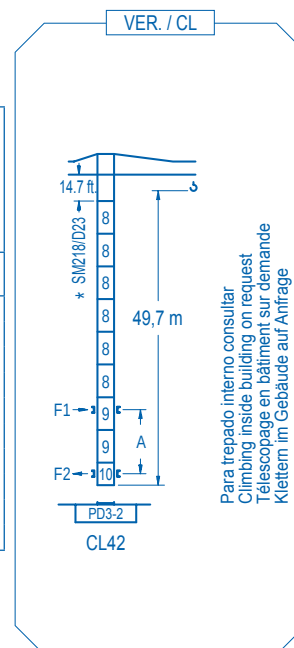

R. máx.	En servicio In operation En service In Betrieb	5XR73.....279,540 lbs. 10XR83.....274,250 lbs.
R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb	5XR73.....604,620 lbs. 10XR83.....466,050 lbs.

Para otras zonas de viento o alturas superiores consultar
For other wind zones or additional hook heights on request
Pour d'autres zones de vent ou des hauteurs supplémentaires sur demande
Für andere Windzonen oder weiteren Hakenhöhen auf Anfrage

	5XA73	10XA83
A max	168.6	259.8
B max	-	108.3
C max	154.9	154.9
H max	98.6	126.4




	ES73	ES43	ES63	ES83
A max	162.7	180.8	216.9	271.0
B max	108.3	108.3	108.3	108.3
C max	154.9	154.9	154.9	154.9
H max	317.6	425.9	335.6	443.9

	CFU-7.5
	10 hp.
0	308 ft./min

	GR-12
	4 x 88 ft.lbs.
0	0.7 rpm

	TRA-7.5	TRA-10
	2 x 55 ft.lbs.	2 x 74 ft.lbs.
0	78 ft./min	
5XR73		10XR83

	TRA-7.5VC	TRA-10VC
	2 x 55 ft.lbs.	2 x 74 ft.lbs.
0	78 ft./min	
5XR73		10XR83

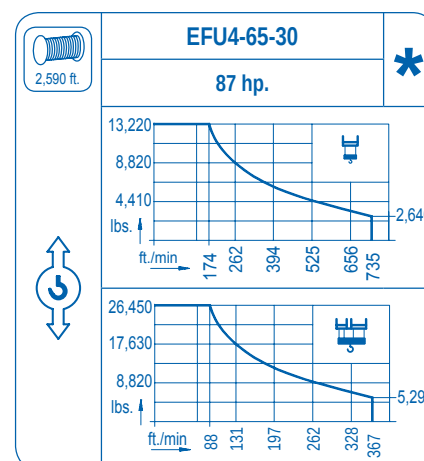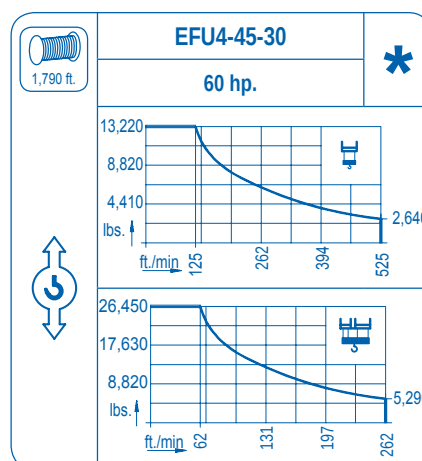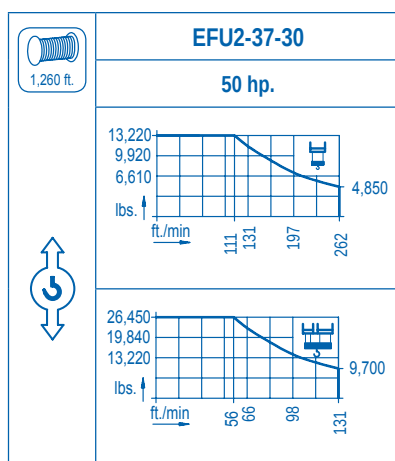

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	480 V 3 ph 60 Hz
--	---

Opcional Optional En option Kaufoption	*
---	----------

LINDEN COMANSA
Construcciones Metálicas COMANSA S. A.

Tel.: (34) 948 335 020
Fax: (34) 948 330 810
e-mail: info@comansa.com
www.comansa.com
Polígono Urbizkain
E-31620 HUARTE-PAMPLONA.- SPAIN

DS.1003.05	01/10	21 LC 400	26,450 lbs.
-------------------	--------------	------------------	--------------------