

Hydraulic Crawler Crane

CKS

600

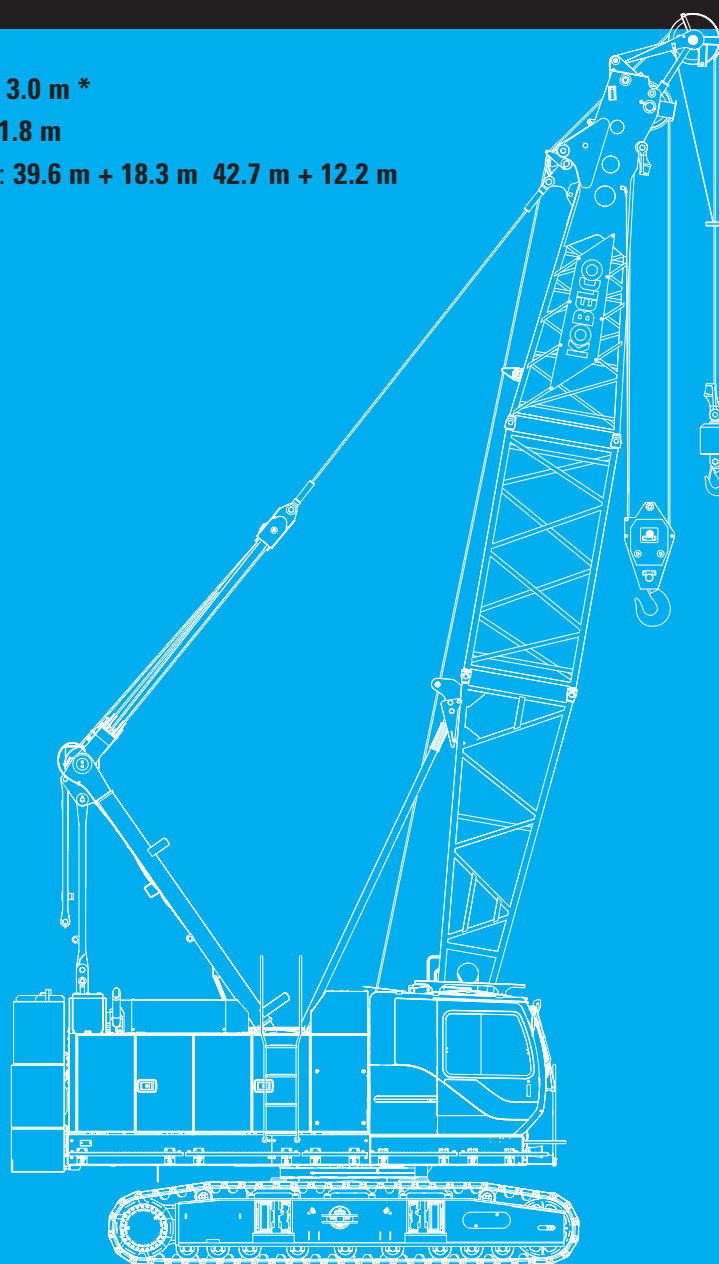
Model : CKS600

Max. Lifting Capacity: **60 t x 3.0 m ***

Max. Crane Boom Length: **51.8 m**

Max. Fixed Jib Combination: **39.6 m + 18.3 m 42.7 m + 12.2 m**

* c/w = 11.0 t



KOBELCO



CKS600

CONTENTS

3**SPECIFICATIONS****5****GENERAL DIMENSIONS****6****BOOM AND JIB ARRANGEMENTS****7****WORKING RANGES****10****SUPPLEMENTAL DATA****11****LIFTING CAPACITIES****13****SUPPLEMENTAL DATA FOR CLAMSHELL****14****LIFTING CAPACITIES****15****SUPPLEMENTAL DATA FOR BARGE****16****LIFTING CAPACITIES****17****TRANSPORTATION PLAN****21****PARTS AND ATTACHMENTS**



Power Plant

Model: HINO J08E-VM

Type: 4 cycle, water-cooled, vertical in-line 6, direct injection, turbo-charger, intercooler

Displacement: 7.684 liters

Rated power: 213 kW/2,100 min⁻¹

Max. Torque: 1,017 N·m/1,600 min⁻¹

Cooling System: Water-cooled

Starter: 24V-5kW

Radiator: Corrugated type core, thermostatically controlled

Air cleaner: Dry type with replaceable paper element

Throttle: Twist grip type hand throttle, electrically actuated

Fuel filter: Replaceable paper element

Batteries: Two 12V x 136 Ah/5HR capacity batteries, series connected

Fuel tank capacity: 400 liters



Hydraulic System

Main pumps: 3 variable displacement piston pumps

Control: Full-flow hydraulic control system for infinitely variable pressure to all winches, propel and swing. Controls respond instantly to the touch, delivering smooth function operation.

Cooling: Oil-to-air heat exchanger (plate-fin type)

Filtration: Full-flow and bypass type with replaceable element

Max. relief valve pressure:

Load hoist, boom hoist and propel system: 31.9 MPa

Swing system: 27.5 MPa

Control system: 5.4 MPa

Hydraulic Tank Capacity: 440 liters



Boom Hoisting System

Powered by a hydraulic motor through a planetary reducer.

Brake: A spring-set, hydraulically released multiple-disc brake is mounted on the boom hoist motor and operated through a counter-balance valve.

Drum Lock: External ratchet for locking drum

Drum: Single drum, grooved for 16mm dia. wire rope

Line Speed: Single line on first drum layer

Hoisting/Lowering: 70 to 2 m/min

Boom hoisting/lowering: 16 mm x 150 m

Boom guy line: 30 mm

Boom backstops: Required for all boom length



Load Hoisting System

Front and rear drums for load hoist powered by a hydraulic variable plunger motors, driven through planetary reducers.

Negative Brake: A spring-set, hydraulically released multiple-disc brake is mounted on the hoist motor and operated through a counter-balance valve. (Positive free fall brake is optional)

Drum Lock: External ratchet for locking drum

Drums:

Front Drums:

550 mm P.C.D x 545 mm wide drum, grooved for 22 mm wire rope. Rope capacity is 180 m working length and 335 m storage length.

Rear Drum: 550 mm P.C.D x 545 mm grooved for 22 mm wire rope. Rope capacity is 130 m working length and 335m storage length.

Diameter of wire rope

Main winch: 22 mm x 180 m

Aux. winch: 22 mm x 130 m

Third winch: 22 mm x 145 m

Line Speed*:

Hoisting/lowering: 120 to 3 m/min

Line Pull:

Max. Line Pull* : 153 kN {15.5 tf}

(Referential performance)

Rated Line Pull: 69 kN {7.0 tf}

*Single line on first drum layer



Swing System

Swing unit is powered by hydraulic motor driving spur gears through planetary reducer, the swing system provides 360° rotation.

Swing parking brakes: A spring-set, hydraulically released multiple-disc brake is mounted on swing motor.

Swing circle: Single-row ball bearing with an integral internally cut swing gear.

Swing lock: Manually, two position lock for transportation

Swing Speed: 4.5 min⁻¹



Upper Structure

Torsion-free precision machined upper frame. All components are located clearly and service friendly. Engine will with low noise level.

Counterweight: 13.0 ton



Cab & Control

Totally enclosed, full vision cab with safety glass, fully adjustable, high backed seat with a headrest and armrests, and intermittent wiper and window washer (skylight and front window).

Cab fittings:

Air conditioner, convenient compartment (for tool), cup holder, cigarette lighter, sun visor, roof blind, tinted glass, floor mat, footrest, and shoe tray





Lower Structure

Steel-welded carbody with axles. Crawler assemblies can be hydraulically extended for wide-track operation or retracted for transportation. Crawler belt tension is maintained by hydraulic jack force on the track-adjusting bearing block.

Crawler drive: Independent hydraulic propel drive is built into each crawler side frame. Each drive consists of a hydraulic motor propelling a driving tumbler through a planetary gear box. Hydraulic motor and gear box are built into the crawler side frame within the shoe width.

Crawler brakes: Spring-set, hydraulically released parking brakes are built into each propel drive.

Steering mechanism: A hydraulic propel system provides both skid steering (driving one track only) and counter-rotating steering (driving each track in opposite directions).

Track rollers: Sealed track rollers for maintenance-free operation.

Shoe (flat): 760 mm wide each crawler

Max. gradeability: 40%



Weight

Including upper and lower machine, 13.0 ton counterweight and basic boom, hook, and other accessories.

Weight: 46.1 ton

Ground pressure: 63.1 kPa



Attachment

Boom & Jib:

Welded lattice construction using tubular, high-tensile steel chords with pin connection between sections.

Boom and Jib length

	Min. Length (Min. combination)	Max. Length (Max. combination)
Crane Boom	9.1 m	51.8 m
Fixed Jib	30.5 m + 6.1 m	42.7 m + 12.2 m, 39.6 m + 18.3 m

Main Specifications (Model: CKS600)

Crane Boom	
Max. Lifting Capacity	60 t x 3.0 m ^{*1}
Max. Length	51.8 m
Fixed Jib	
Max. Lifting Capacity	7.0 t x 12.0 m
Max. Combination	42.7 m + 12.2 m
Main & Aux. Winch	
Max. Line Speed (1st layer)	120 m/min
Rated Line Pull (Single line)	69 kN {7.0 tf}
Wire Rope Diameter	22 mm
Wire Rope Length	180 m (Main), 130 m (Aux.)
Brake Type (free fall)	Wet-type multiple disc brake (Optional)
Working Speed	
Swing Speed	4.5 min ⁻¹ {rpm}
Travel Speed	2.3/1.5 km/h
Power Plant	
Model	HINO J08E-VM
Engine Output	213 kW/2,100 min ⁻¹
Fuel Tank	400 liters

Hydraulic System

Main Pumps	3 variable displacement
Max. Pressure	31.9 MPa {325 kgf/cm ² }
Hydraulic Tank Capacity	440 liters
Weight	
Operating Weight	46.1 t ^{*2}
Ground Pressure	63.1 kPa
Counterweight	13,030 kg
Transport Weight	31,640 kg ^{*3}

Units are SI units. { } indicates conventional units.

Line speeds in table are for light loads. Line speed varies with load.

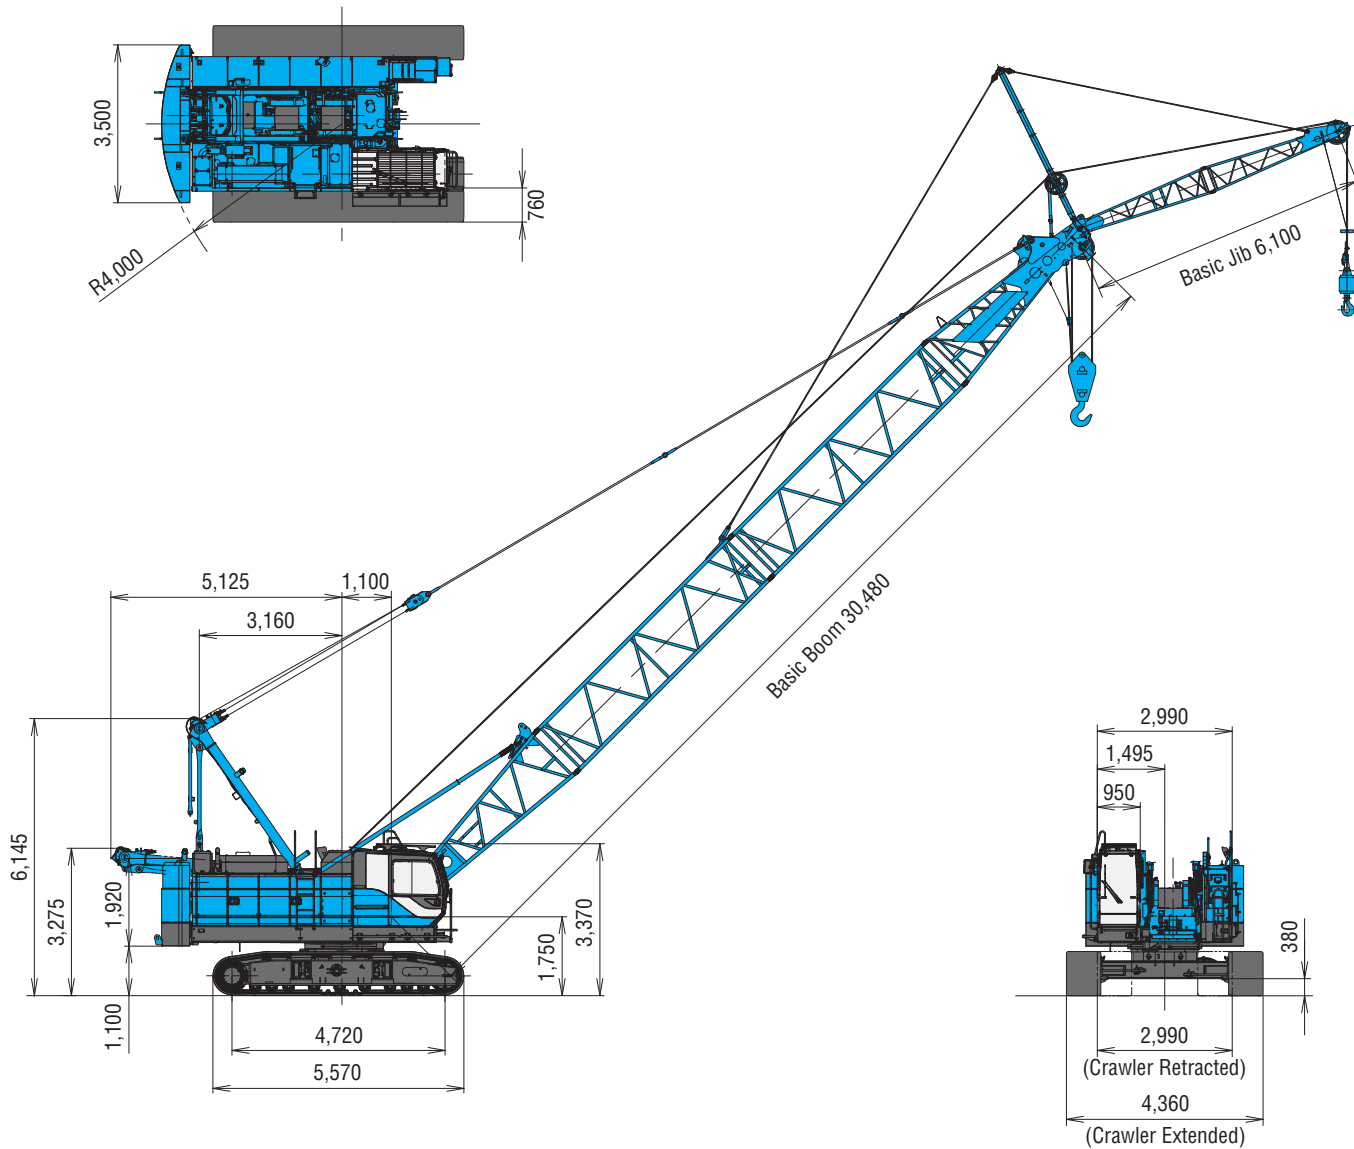
^{*1} c/w = 11.0 t

^{*2} Including upper and lower machine, 13.0 ton counterweight, basic boom, hook, and other accessories.

^{*3} Base machine with boom base, gantry, crawlers, and wire ropes (front/rear/boom hoist)

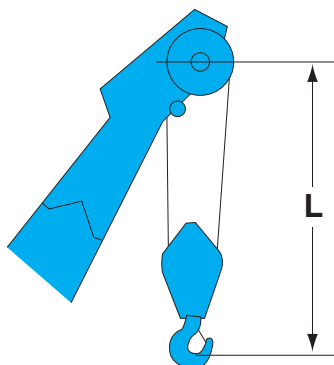


(Unit: mm)

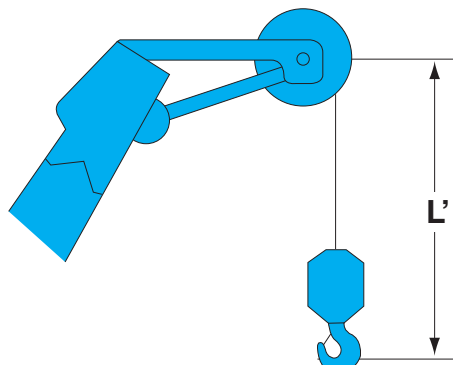


This catalog may contain photographs of machines with specifications, attachments and optional equipment.

Limit of Hook Lifting



Hook	L
60 t hook	3.9 m
32 t hook	3.7 m
19 t hook	3.6 m



Hook	L'
Ball hook	3.0 m

Crane Boom Arrangements

Boom length m (ft)	Boom arrangement
9.1 (30)	※ ◀B T▶
12.2 (40)	※ ◀B 10 T▶
15.2 (50)	◀B 20 T▶ ※ ◀B 10 10 T▶
18.3 (60)	◀B 30 T▶ ※ ◀B 10 20 T▶
21.3 (70)	◀B 20 20 T▶ ◀B 10 30 T▶ ※ ◀B 10 10 20 T▶
24.4 (80)	◀B 10 10 30 T▶ ◀B 20 30 T▶ ※ ◀B 10 20 20 T▶
27.4 (90)	◀B 10 10 20 20 T▶ ◀B 30 30 T▶ ※ ◀B 10 20 30 T▶
30.5 (100)	◀B 10 30 30 T▶ ※ ◀B 10 30 10 20 T▶

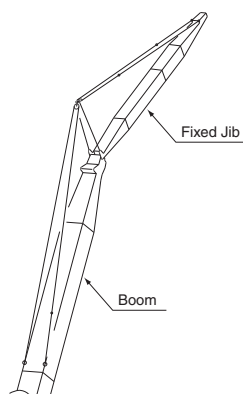
Boom length m (ft)	Boom arrangement
33.5 (110)	◀B 20 30 30 T▶ ※ ◀B 10 10 30 30 T▶
36.6 (120)	※ ◀B 10 20 30 30 T▶
39.6 (130)	◀B 20 20 30 30 T▶ ◀B 10 10 20 30 30 T▶ ◀B 10 10 20 30 10 20 T▶ ※ ◀B 20 20 30 10 20 T▶
42.7 (140)	※ ◀B 10 20 20 30 30 T▶
45.7 (150)	◀B 20 20 20 30 30 T▶ ※ ◀B 10 10 20 20 30 30 T▶
48.8 (160)	※ ◀B 10 20 20 20 30 30 T▶
51.8 (170)	※ ◀B 10 10 20 20 20 30 30 T▶

Symbol	Boom Length	Remarks
◀B	5.2 m	Boom Base
T▶	3.9 m	Boom Top
10	3.0 m	Insert Boom
20	6.1 m	Insert Boom
30	9.1 m	Insert Boom
30 [^]	9.1 m	Insert Boom with lug

↗ mark shows the guy line installing position when the fixed jib is used.

※ mark shows the standard boom arrangement which enables each boom length of less than that boom length to be configured.

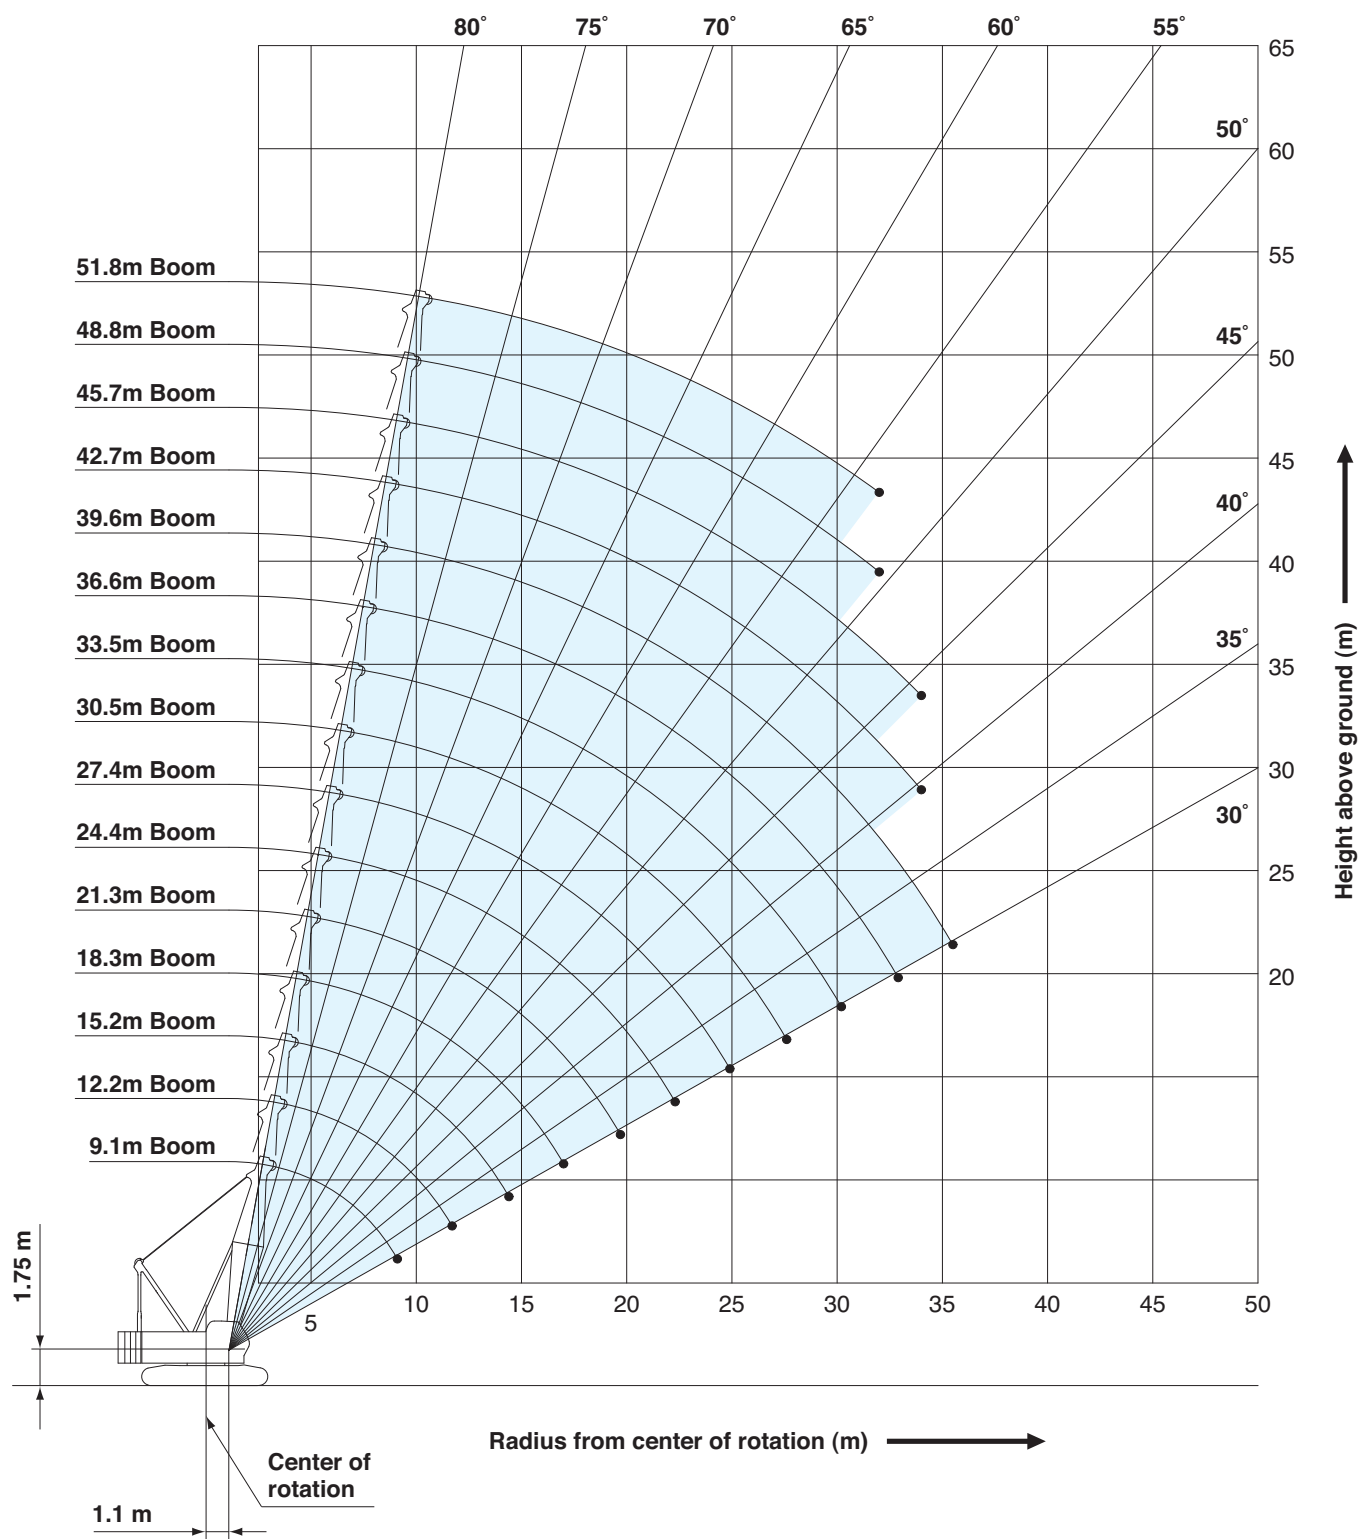
Fixed Jib Arrangements



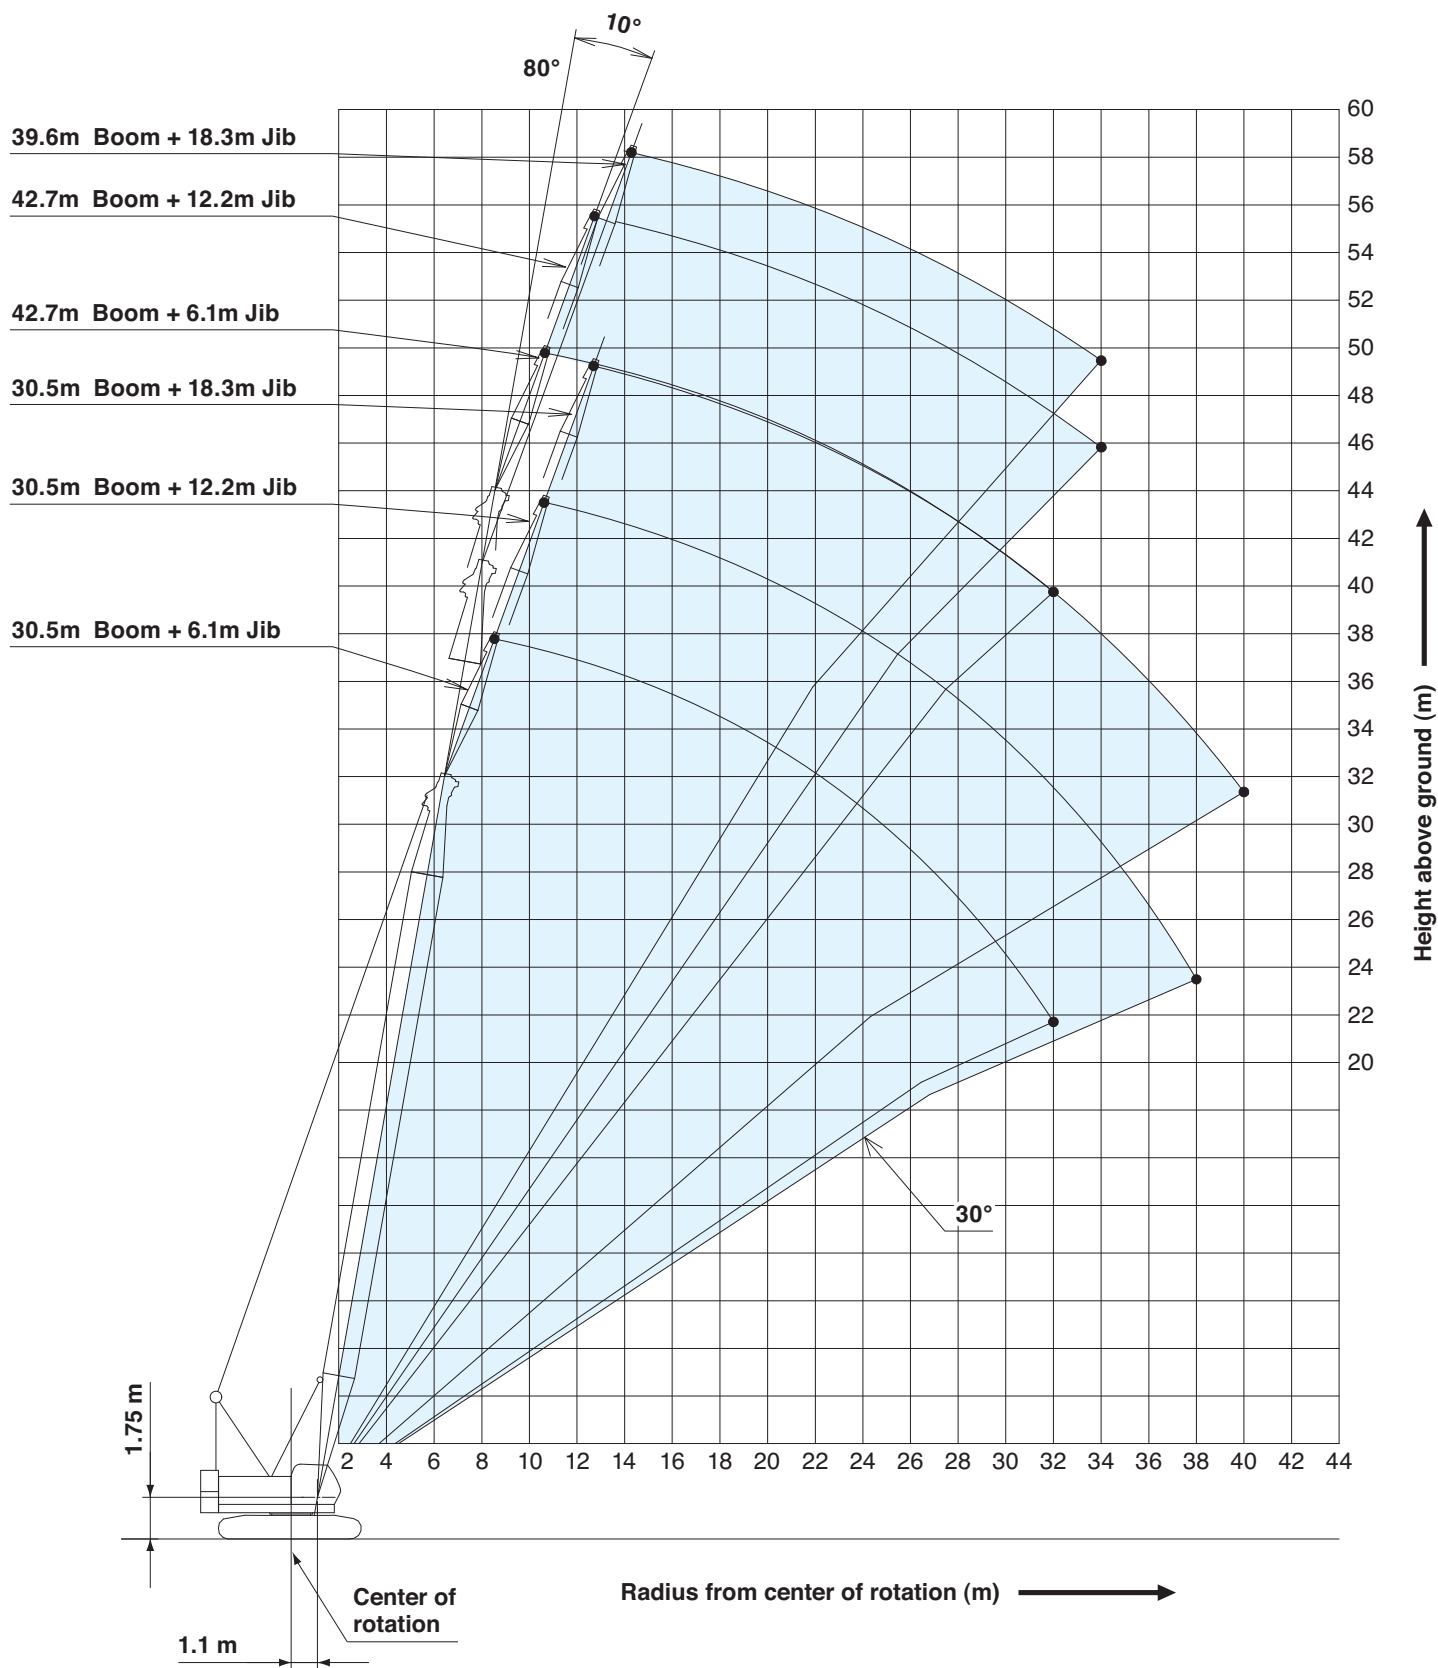
Crane boom length	Jib length m (ft)	Jib arrangement
30.5 m ~ 42.7 m	6.1 (20)	◀B T▶ 3.0/ 3.0
	12.2 (40)	◀B 20 T▶
30.5 m ~ 39.6 m	18.3 (60)	◀B 20 20 T▶

Symbol	Jib Length	Remarks
◀B	3.0 m	Jib Base
T▶	3.0 m	Jib Top
20	6.1 m	Insert Jib

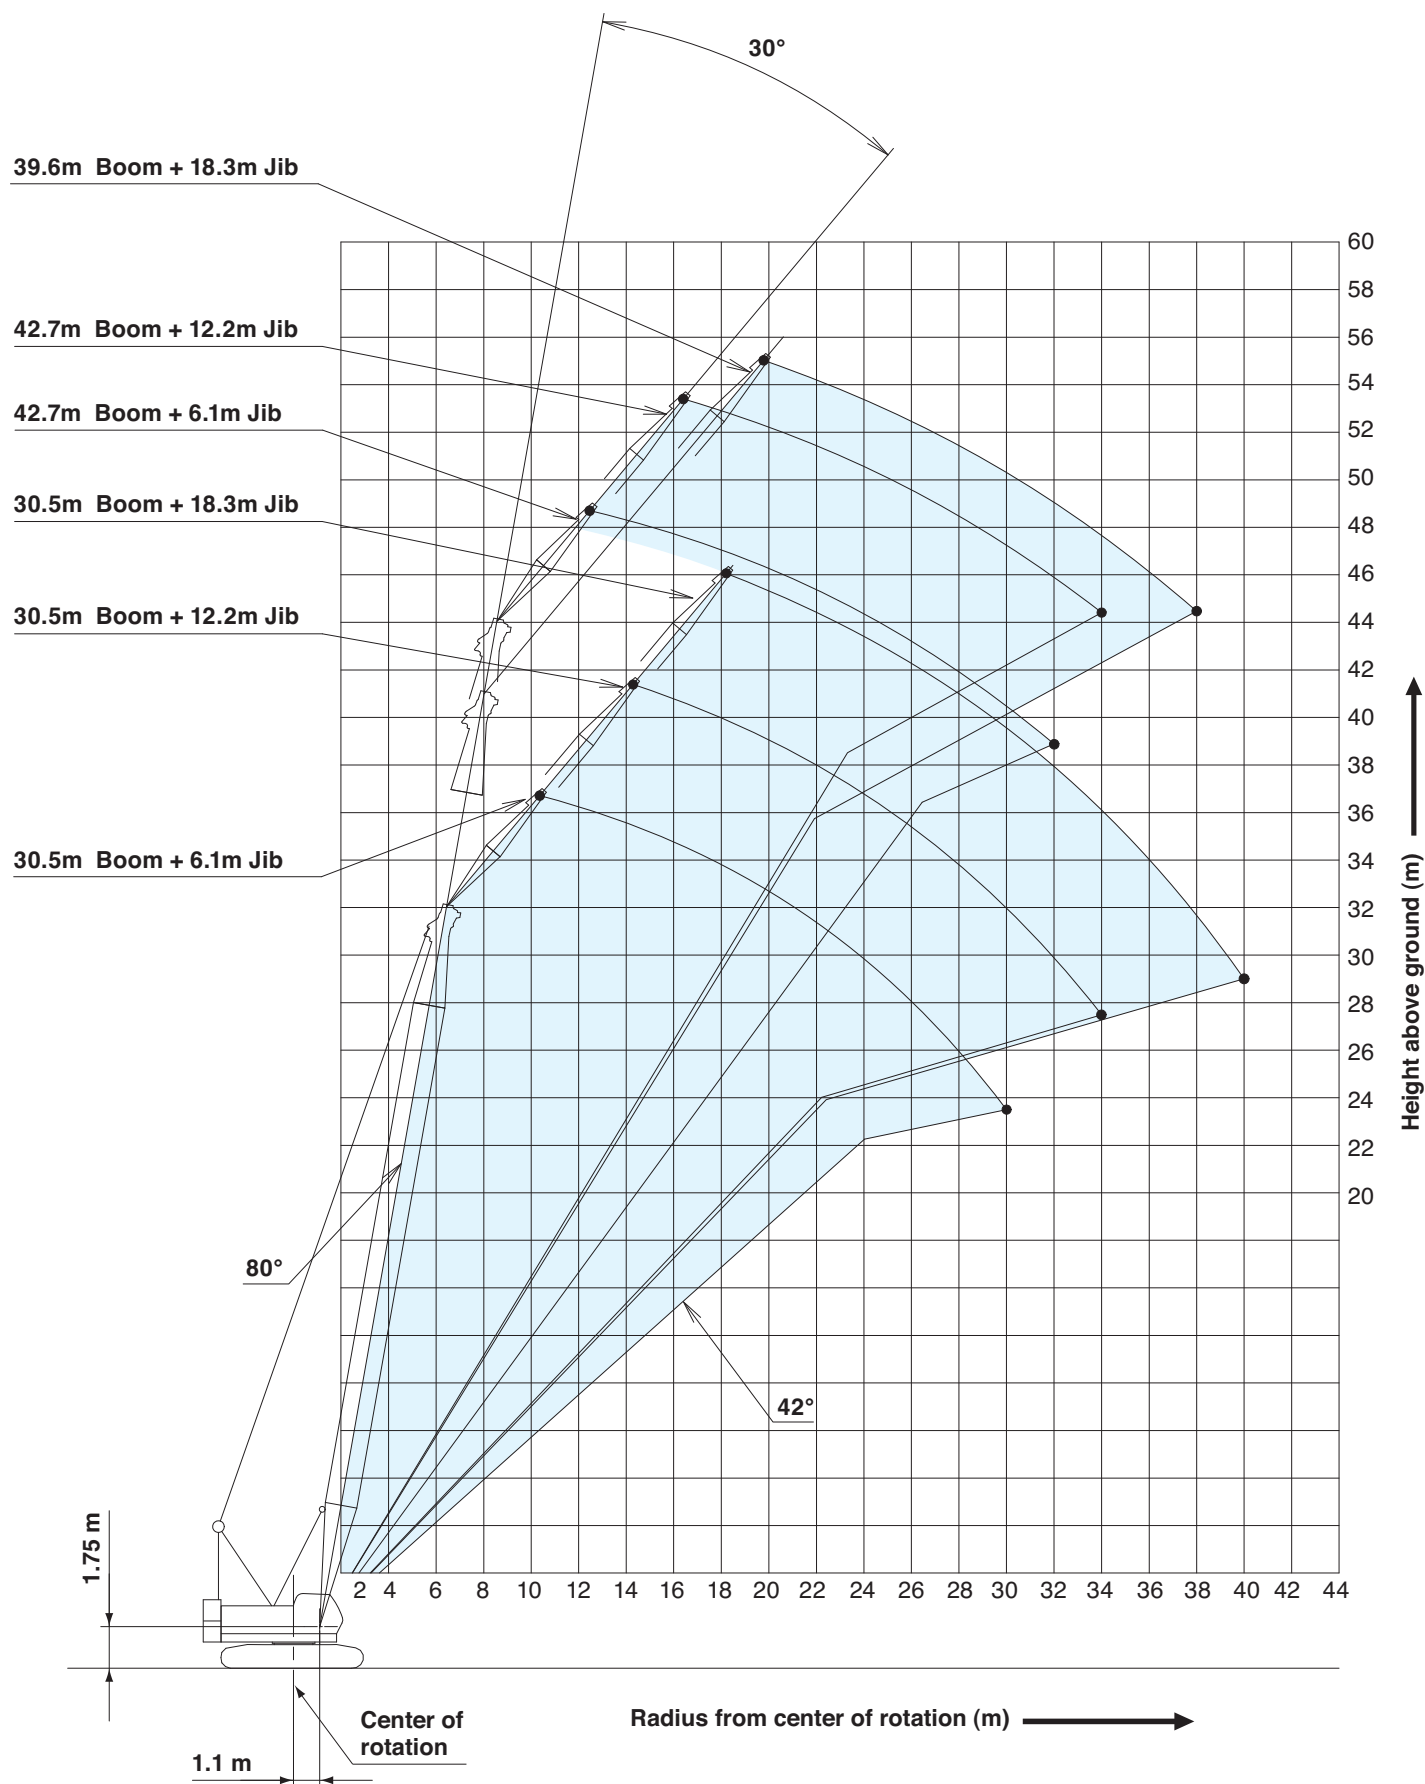
Crane Boom



Fixed Jib 10°



Fixed Jib 30°



- Ratings according to EN13000.
- Operating radius is the horizontal distance from centerline of Rotation to a vertical line through the center of gravity of the load.
- Deduct weight of hook block (s), slings and all other load handling accessories from main boom ratings shown.
- Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions, out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment.
The operator, therefore, has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.
- Ratings are for operation on a firm and level surface, up to 1 % gradient.
- At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
- Boom inserts and guy lines must be arranged as shown in the "operator's manual".
- Boom hoist reeving is 10 part line.
- Gantry must be in raised position for all conditions.
- Boom backstops are required for all boom lengths.
- The boom should be erected over the front of the crawlers, not laterally.
- Ratings inside of boxes  are limited by strength of materials.
- The minimum rated load is 1.0 (ton).
- Crawler frames must be fully extended for all crane operations.
- When erecting or lowering the boom or the jib combination shown below, the blocks for erection must be placed under the front of the crawlers.
 - The boom length 48.8 m (160 ft) or over
 - The combination length of the boom 39.6 m (130 ft) and the fixed jib 18.3 m (60 ft)
 - The combination length of the boom 42.7 m (140 ft) and the any length of fixed jib

(Crane boom lifting)

- The total load that can be lifted is the value for weight of main hook block, slings, and all other load handling accessories deducted from crane boom ratings shown.

(Fixed jib lifting)

- The total load that can be lifted is the value for weight of jib hook block, slings, and all other load handling accessories deducted from fixed jib ratings shown.
- The availability of fixed jib mounting
 - On crane boom : Range 30.5 m to 42.7 m.
 But 18.3 m jib is not allowed to install on 42.7 m main boom.

<Reference Information>

Main hoist loads

No. of Parts of Line	1	2	3	4	5
Maximum Loads (kN)	69	137	206	275	343
Maximum Loads (t)	7.0	14.0	21.0	28.0	35.0

No. of Parts of Line	6	7	8	9
Maximum Loads (kN)	412	481	549	588
Maximum Loads (t)	42.0	49.0	56.0	60.0

Auxiliary hoist loads

No. of Parts of Line	1
Maximum Loads (kN)	69
Maximum Loads (t)	7.0

Weight of hook block				
Hook Block	60 t	32 t	19 t	Ball Hook
Weight (t)	0.7	0.5	0.4	0.16

Operation of this equipment in excess of rated loads or disregard of instruction voids the warranty.



 Crane Boom Lifting Capacities Counterweight: 11.0 t Unit: metric ton		
Working radius (m)	Boom length (m)	Working radius (m)
3.0	3.0m/60.0	3.0
3.5	52.6	3.5
4.0	42.2	4.0
4.5	34.2	4.5
5.0	28.6	5.0
5.5	24.6	5.5
6.0	21.5	6.0
7.0	17.2	7.0
8.0	14.2	8.0
9.0	12.1	9.0
10.0	9.1m/12.0	10.0
Reeves	9	Reeves

 Crane Boom Lifting Capacities Counterweight: 13.0 t Unit: metric ton																		
Working radius (m)	Boom length (m)	9.1	12.2	15.2	18.3	21.3	24.4	27.4	30.5	33.5	36.6	39.6	42.7	45.7	48.8	51.8	Boom length (m)	Working radius (m)
3.0	3.0m/56.0																	3.0
3.5	54.3	3.6m/50.0																3.5
4.0	45.9	43.3	4.1m/38.9															4.0
4.5	37.2	37.0	34.6	4.7m/30.9														4.5
5.0	31.2	31.1	30.3	28.7	5.2m/26.0													5.0
5.5	26.8	26.7	26.7	25.7	24.4	5.7m/22.3												5.5
6.0	23.5	23.4	23.3	23.2	22.1	21.1	6.2m/19.5	6.8m/16.9										6.0
7.0	18.7	18.7	18.6	18.6	18.5	17.8	17.1	16.4										7.0
8.0	15.6	15.4	15.4	15.3	15.3	15.2	14.7	14.1	8.0m/13.6	8.0m/13.1	8.4m/12.0	8.9m/10.8						8.0
9.0	13.3	13.1	13.1	13.0	12.9	12.9	12.8	12.4	11.9	11.5	11.1	10.7	9.4m/ 9.8	9.9m/ 8.9				9.0
10.0	9.1m/13.1	11.4	11.3	11.3	11.2	11.1	11.1	11.0	10.6	10.2	9.8	9.5	9.2	8.8	10.5m/ 8.0			10.0
12.0		11.8m/ 9.2	8.8	8.8	8.7	8.6	8.6	8.5	8.4	8.2	7.9	7.6	7.4	7.1	6.8			12.0
14.0			7.2	7.1	7.0	7.0	6.9	6.8	6.7	6.7	6.5	6.3	6.0	5.8	5.5			14.0
16.0			14.4m/ 7.0	6.0	5.9	5.8	5.7	5.6	5.5	5.5	5.3	5.2	5.0	4.8	4.5			16.0
18.0				17.1m/ 5.5	4.9	4.8	4.8	4.7	4.6	4.5	4.4	4.3	4.2	4.0	3.8			18.0
20.0					19.7m/ 4.3	4.1	4.0	3.9	3.8	3.8	3.6	3.6	3.5	3.3	3.1			20.0
22.0						3.5	3.5	3.3	3.2	3.2	3.0	3.0	2.9	2.7	2.6			22.0
24.0						22.3m/ 3.4	3.0	2.8	2.7	2.7	2.5	2.5	2.4	2.2	2.1			24.0
26.0							25.0m/ 2.8	2.4	2.3	2.3	2.1	2.1	1.9	1.8	1.7			26.0
28.0								27.6m/ 2.2	2.0	1.9	1.8	1.7	1.6	1.5	1.3			28.0
30.0									1.7	1.6	1.5	1.4	1.3	1.2	1.0			30.0
32.0									30.3m/ 1.7	1.4	1.2	1.2	1.0					32.0
34.0										32.9m/ 1.3	1.0							34.0
36.0											35.6m/1.0							36.0
Reeves	8	8	6	5	4	4	3	3	3	2	2	2	2	2	2			Reeves

Note:

Ratings according to EN13000.

Ratings shown in are determined by the strength of the boom or other structural components.

Weight of hooks, hook blocks, slings and other lifting devices are a part of the total load.

Their total weight must be subtracted from the rated load to obtain the weight that can be lifted.

Lifting capacities may vary depending on hook used or with/without auxiliary sheave.

Please refer rated chart in operator's cabin.





Fixed Jib Lifting Capacities (Without Main Hook Block) (Jib Offset Angle : 10°)

Counterweight: 13.0 t

Unit: metric ton

Boom length (m)		30.5			33.5			36.6			39.6			42.7		Boom length (m)
Jib length (m)		6.1	12.2	18.3	6.1	12.2	18.3	6.1	12.2	18.3	6.1	12.2	18.3	6.1	12.2	Jib length (m)
Working radius (m)	9.0	7.0			7.0											9.0
	10.0	7.0			7.0			7.0			7.0					10.0
	12.0	7.0	7.0	4.5	7.0	7.0		7.0	7.0		7.0			6.9		12.0
	14.0	6.7	6.7	4.5	6.5	6.4	4.5	6.2	6.2	4.5	5.9	5.9	4.5	5.7	5.7	14.0
	16.0	5.5	5.7	4.5	5.4	5.4	4.5	5.2	5.2	4.5	4.9	5.0	4.5	4.7	4.7	16.0
	18.0	4.6	4.7	4.5	4.5	4.6	4.5	4.4	4.4	4.3	4.1	4.2	4.1	3.9	4.0	18.0
	20.0	3.9	4.0	4.0	3.8	3.9	3.9	3.7	3.8	3.7	3.5	3.6	3.5	3.3	3.4	20.0
	22.0	3.3	3.4	3.5	3.2	3.3	3.4	3.1	3.3	3.2	2.9	3.0	3.0	2.8	2.9	22.0
	24.0	2.8	3.0	3.0	2.7	2.9	2.9	2.6	2.8	2.8	2.5	2.6	2.6	2.3	2.4	24.0
	26.0	2.4	2.6	2.6	2.3	2.5	2.5	2.2	2.4	2.4	2.1	2.2	2.2	2.0	2.1	26.0
	28.0	2.1	2.2	2.3	1.9	2.1	2.2	1.8	2.0	2.1	1.7	1.9	1.9	1.6	1.7	28.0
	30.0	1.8	1.9	2.0	1.6	1.8	1.9	1.5	1.7	1.8	1.4	1.6	1.6	1.3	1.5	30.0
	32.0	1.5	1.7	1.7	1.4	1.6	1.6	1.3	1.5	1.5	1.2	1.3	1.4	1.1	1.2	32.0
	34.0		1.4	1.5	1.2	1.3	1.4	1.1	1.2	1.3		1.1	1.1		1.0	34.0
	36.0		1.2	1.3	1.0	1.1	1.2		1.0	1.1						36.0
	38.0		1.1	1.1		1.0	1.0									38.0
	40.0			1.0												40.0
Reeves		1	1	1	1	1	1	1	1	1	1	1	1	1	1	Reeves



Fixed Jib Lifting Capacities (Without Main Hook Block) (Jib Offset Angle : 30°)

Counterweight: 13.0 t

Unit: metric ton

Boom length (m)		30.5			33.5			36.6			39.6			42.7		Boom length (m)
Jib length (m)		6.1	12.2	18.3	6.1	12.2	18.3	6.1	12.2	18.3	6.1	12.2	18.3	6.1	12.2	Jib length (m)
Working radius (m)	12.0	7.0			7.0			7.0			7.0					12.0
	14.0	7.0			6.8			6.6			6.3			6.1		14.0
	16.0	5.7	5.0		5.7	5.0		5.5	5.0		5.2	5.0		5.0		16.0
	18.0	4.8	5.0	3.2	4.7	5.0	3.2	4.6	4.9		4.4	4.7		4.2	4.5	18.0
	20.0	4.1	4.3	3.2	4.0	4.3	3.2	3.9	4.2	3.2	3.7	4.0	3.2	3.6	3.8	20.0
	22.0	3.5	3.7	3.2	3.4	3.7	3.2	3.3	3.6	3.2	3.2	3.4	3.2	3.0	3.3	22.0
	24.0	3.0	3.2	3.2	2.9	3.2	3.2	2.8	3.1	3.2	2.7	3.0	3.1	2.6	2.8	24.0
	26.0	2.5	2.8	2.9	2.4	2.7	2.9	2.4	2.7	2.8	2.2	2.5	2.7	2.1	2.4	26.0
	28.0	2.2	2.4	2.6	2.1	2.4	2.5	2.0	2.3	2.4	1.9	2.2	2.3	1.8	2.1	28.0
	30.0	1.9	2.1	2.3	1.8	2.0	2.2	1.7	2.0	2.1	1.6	1.8	2.0	1.5	1.8	30.0
	32.0		1.8	2.0	1.5	1.8	1.9	1.4	1.7	1.8	1.3	1.6	1.7	1.2	1.5	32.0
	34.0		1.6	1.8		1.5	1.7	1.2	1.4	1.6	1.0	1.3	1.5	1.0	1.2	34.0
	36.0			1.5		1.3	1.4		1.2	1.4		1.1	1.2		1.0	36.0
	38.0			1.3			1.2		1.0	1.2			1.0			38.0
	40.0			1.1			1.1			1.0						40.0
Reeves		1	1	1	1	1	1	1	1	1	1	1	1	1	1	Reeves

Note:

Ratings according to EN13000.

Ratings shown in are determined by the strength of the boom or other structural components.

Weight of hooks, hook blocks, slings and other lifting devices are a part of the total load.

Their total weight must be subtracted from the rated load to obtain the weight that can be lifted.

Lifting capacities may vary depending on hook used or with/without auxiliary sheave.

Please refer rated chart in operator's cabin.



- Operating radius is the horizontal distance from centerline of rotation to a vertical line through the center of gravity of the load.
- Deduct weight of bucket, slings and all other load handling accessories from main boom ratings shown.
- Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions, out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment. The operator, therefore, has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.
- Rated loads do not exceed 66% of minimum tipping loads.
- Ratings are for operation on a firm and level surface, up to 1% gradient.
- At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
- Boom inserts and guy lines must be arranged as shown in the "operator's manual".
- Boom hoist reeving is 10 part line.
- Gantry must be in raised position for all conditions.
- Boom backstops are required for all boom lengths.
- The boom should be erected over the front of the crawlers, not laterally.
- Crawler frames must be fully extended for all crane operations.

(Clamshell bucket lifting)

- The total load that can be lifted is the value for weight of bucket, slings, and all other load handling accessories deducted from main boom ratings shown.
- The weight of bucket and materials must not exceed rated load.
- Optimum bucket should be required according to material. $\text{Bucket capacity (m}^3\text{)} \times \text{specified gravity of material (ton/m}^3\text{)} + \text{bucket weight (ton)} = \text{rated load}$.
- Bucket weight must also be decreased according to operating cycle and bucket lowering height.
- Rated loads are determined by stability and boom strength. During simultaneous operations of boom and swing, rapid acceleration or deceleration must be avoided.
- Do not attempt to cast the bucket while swinging or diagonal draw-cutting.

<Reference Information>

Main hoist loads

No. of Parts of Line	1
Maximum Loads (kN)	54
Maximum Loads (t)	5.5

Assembling the counterweight

13.0 ton counterweight

No.3	No.4
No.2	
No.1	

Counterweights

Operation of this equipment in excess of rated loads or disregard of instruction voids the warranty.



Clamshell Rating Charts

Crane Boom Capacities

Counterweight: 13.0 t
Crawler Fully Extended

Unit: metric ton

Load radius (m)	Boom length (m)	9.1	12.2	15.2	18.3					Boom length (m)	Load radius (m)
5.0	5.5	5.5								5.0	5.0
5.5	5.5	5.5								5.5	5.5
6.0	5.5	5.5	5.5							6.0	6.0
7.0	5.5	5.5	5.5	5.5						7.0	7.0
8.0	5.5	5.5	5.5	5.5	5.5					8.0	8.0
9.0	5.5	5.5	5.5	5.5	5.5					9.0	9.0
10.0			5.5	5.5	5.5					10.0	10.0
12.0				5.5	5.5					12.0	12.0
14.0				5.5	5.5					14.0	14.0
16.0					5.4					16.0	16.0
18.0										18.0	18.0
20.0										20.0	20.0
22.0										22.0	22.0
24.0										24.0	24.0
26.0										26.0	26.0
28.0										28.0	28.0
30.0										30.0	30.0
32.0										32.0	32.0
34.0										34.0	34.0
36.0										36.0	36.0
38.0										38.0	38.0
40.0										40.0	40.0
42.0										42.0	42.0
44.0										44.0	44.0
Reeves		1	1	1	1					Reeves	

Note:

Please refer rated chart in operator's cabin.



- Operating radius is the horizontal distance from centerline of rotation to a vertical line through the center of gravity of the load.

- Deduct weight of hook block (s), slings and all other load handling accessories from main boom ratings shown.

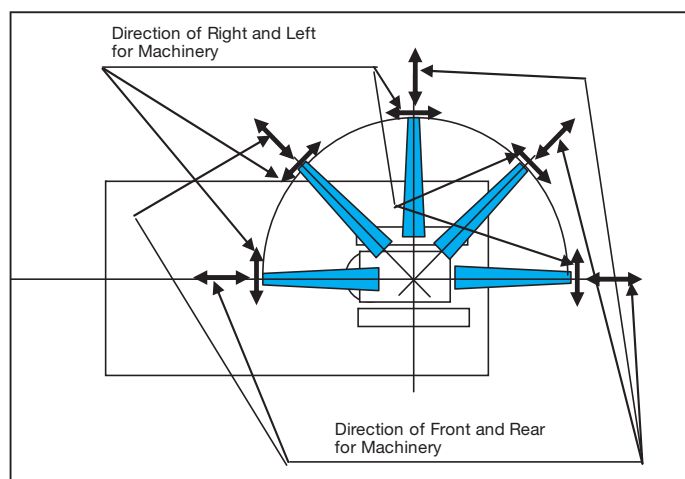
- Condition of barge stability this rating chart were determined under the condition below. The stability of barge shall meet below condition. During operation the machinery static inclination against horizontal level.

(A) Both sides (right & left) of machine

Maximum inclination shall be within 1.5 degrees

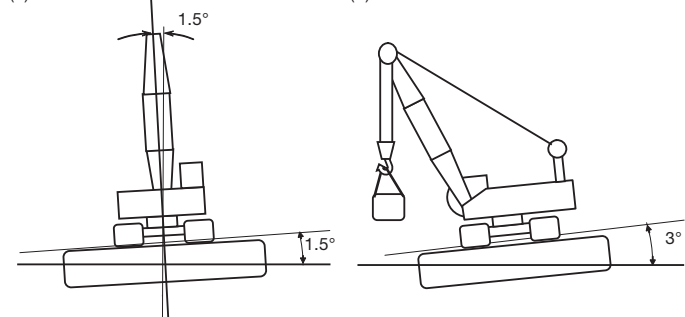
(B) Front & backward of machine

Maximum inclination shall be within 3.0 degrees



(A)

(B)



- Working area shall be inshore and smooth water.

- Applicable regulations for structure Japanese construction codes for mobile crane

※ Regulation of class of shipping (abs, lloyd, bv, nk, etc) are not adapted.

- At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.

- Boom inserts and guy lines must be arranged as shown in the "operator's manual".

- Boom hoist reeving is 10 part line.

- Gantry must be in raised position for all conditions.

- Boom backstops are required for all boom lengths.

- The boom should be erected over the front of the crawlers, not laterally.

- Ratings inside of boxes are limited by strength of materials.

- The minimum rated load is 1.0 (ton).

- Crawler frames must be fully extended for all crane operations.

- The machinery should be fastened to the deck of the barge to prevent tip over and sliding.

- Towing area

Towing area shall be within coastal area and quiet wave condition. Offshore and open sea is not considered for this machinery. Depend on the height of wave, counterweight shall be reduced during towing.

(Crane boom lifting)

- The total load that can be lifted is the value for weight of hook block, slings, and all other load handling accessories deducted from main boom ratings shown.

<Reference Information>

Main hoist loads

No. of Parts of Line	1	2	3	4	5
Maximum Loads (kN)	69	137	206	275	343
Maximum Loads (t)	7.0	14.0	21.0	28.0	35.0

No. of Parts of Line	6
Maximum Loads (kN)	392
Maximum Loads (t)	40.0

Auxiliary hoist loads

No. of Parts of Line	1
Maximum Loads (kN)	69
Maximum Loads (t)	7.0

Weight of Hook Block				
Hook Block	60 t	32 t	19 t	7.0 t Ball Hook
Weight (t)	0.7	0.5	0.4	0.16

Operation of this equipment in excess of rated loads or disregard of instruction voids the warranty.



Barge Raiting Chart

Crane Boom Lifting Capacities

Counterweight: 13.0 t
Crawler Fully Extended

Unit: metric tons

Load radius (m) \ Boom length (m)	9.1	12.2	15.2	18.3	21.3	24.4	27.4	30.5	33.5	36.6	Boom length (m) \ Load radius (m)
3.5	40.0										3.5
4.0	38.8										4.0
4.5	34.3	34.2									4.5
5.0	28.9	28.8									5.0
5.5	24.9	24.9	24.8								5.5
6.0	21.9	21.8	21.8	21.6							6.0
7.0	17.6	17.5	17.4	17.4	17.3	7.5m/15.4					7.0
8.0	14.6	14.5	14.4	14.4	14.3	14.3	8.5m/12.9				8.0
9.0	12.5	12.4	12.3	12.2	12.2	12.1	12.1	9.5m/10.9			9.0
10.0	9.1m/12.3	10.7	10.7	10.6	10.5	10.4	10.4	10.3	9.7	11.0m/8.1	10.0
12.0		11.8m/8.6	8.3	8.3	8.2	8.1	8.1	8.0	7.9	7.7	12.0
14.0			6.8	6.7	6.6	6.6	6.5	6.4	6.3	6.3	14.0
16.0			14.4m/6.6	5.6	5.5	5.4	5.4	5.3	5.2	5.1	16.0
18.0				17.1m/5.1	4.7	4.6	4.5	4.4	4.4	4.3	18.0
20.0					19.7m/4.1	3.9	3.9	3.8	3.7	3.6	20.0
22.0						3.4	3.3	3.2	3.1	3.0	22.0
24.0						22.3m/3.3	2.9	2.7	2.6	2.5	24.0
26.0							25.0m/2.3	2.3	2.2	2.1	26.0
28.0								27.6m/2.1	1.6	1.5	28.0
Reeves	6	5	4	4	3	3	2	2	2	2	Reeves

Note:

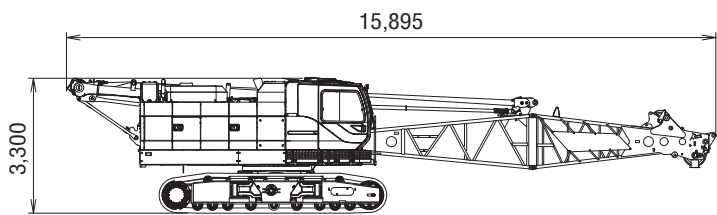
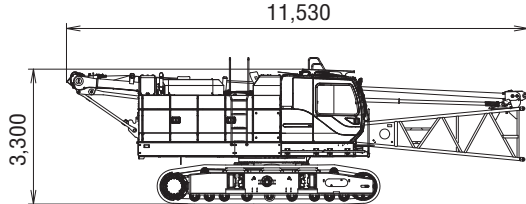

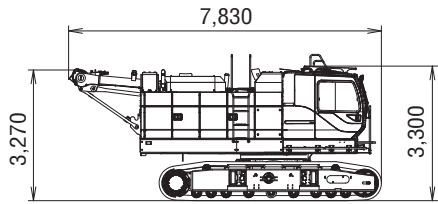



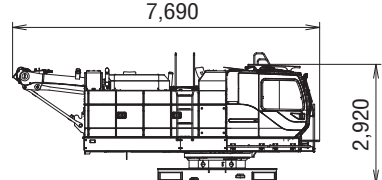


Ratings according to japanese construction codes for mobile cranes and japanese safety ordinance on cranes, etc.

Ratings shown in are determined by the strength of the boom or other structural components.

Lifting capacities may vary depending on hook used or with/without auxiliary sheave.

Please refer rated chart in operator's cabin.



Name	Dimension	Weight (kg)
Base Machine • Boom base • Gantry • Crawler • Wire rope (Front / rear / boom hoist) • Without side steps		32,670
Base Machine • Boom base • Gantry • Crawler • Wire rope (Front / rear / boom hoist) • Without side steps	 	31,640
Base Machine • Gantry • Crawler • Wire rope (Front / rear / boom hoist)	 	30,020
Base Machine • Wire rope (Front / rear / boom hoist) • Without side steps	 	29,000
Base Machine • Gantry • Wire rope (Front / rear / boom hoist) • Without crawler • Without side steps	 	19,200
Crawler	 	5,410

*1 With the side step on cabin side: 3,170
With the side steps on the both sides: 3,340


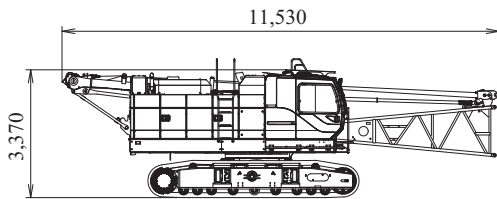
[illegible]

[illegible]

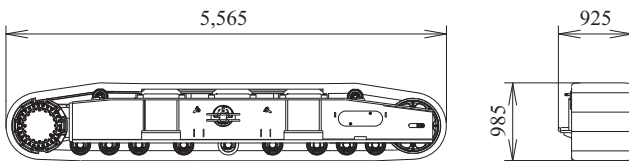
[illegible]

Base Machine


Boom base, Gantry, Crawler, Wire rope (Front/boom hoist)
Weight: 31,640 kg Width: 2,990 mm


Crawler


Weight: 5,410 kg


Jib Tip


Weight: 145 kg


Boom Base


Weight: 125 kg


Jib Strut

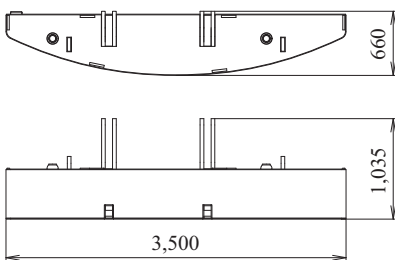
Weight: 190 kg


6.1 m Jib Insert

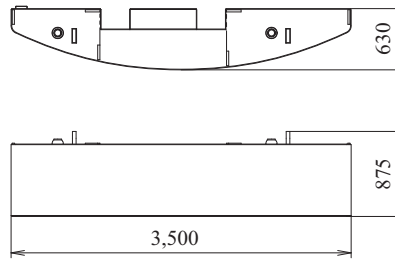
Weight: 140 kg


Counterweight No.1


Weight: 4,920 kg


Counterweight No.2


Weight: 6,080 kg


Counterweight No.2 (L)

Weight: 800 kg

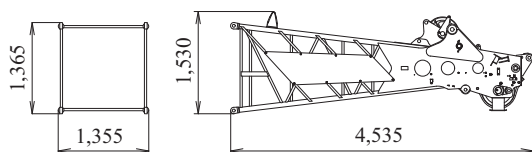

Counterweight No.2 (R)

Weight: 1,230 kg

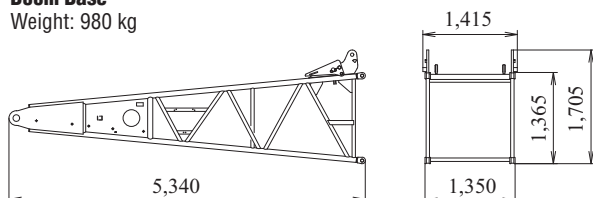


Boom Tip


Weight: 1,010 kg


Boom Base


Weight: 980 kg


3.0 m Boom Insert

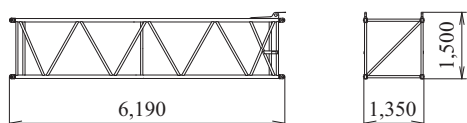
Weight: 255 kg


6.1 m Boom Insert


Weight: 430 kg


6.1 m Boom Insert with Lug


Weight: 445 kg


9.1 m Boom Insert

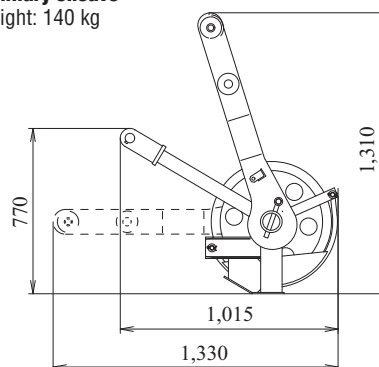
Weight: 615 kg


9.1 m Boom Insert with Lug

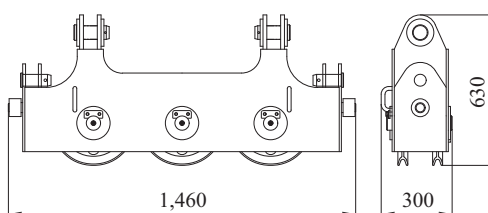
Weight: 630 kg


Auxiliary Sheave

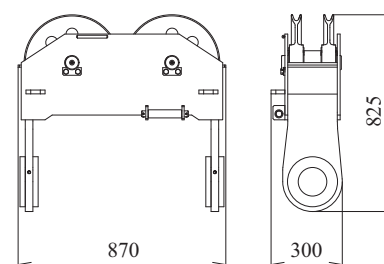
Weight: 140 kg


Upper Spreader


Weight: 280 kg


Lower Spreader


Weight: 200 kg


19 t Hook


Weight: 400 kg


32 t Hook


Weight: 500 kg


60 t Hook

Weight: 700 kg


Ball Hook

Weight: 160 kg



Note: This catalog may contain photographs of machines with specifications, attachments and optional equipment not certified for operation in your country. Please consult KOBELCO for those items you may require. Due to our policy of continual product improvements all designs and specifications are subject to change without advance notice.

Copyright by KOBELCO CRANES CO., LTD. No part of this catalog may be reproduced in any manner without notice.

KOBELCO CRANES CO., LTD.

17-1, Higashigotanda 2-chome, Shinagawa-ku, Tokyo 141-8626 JAPAN

Tel: +81-3-5789-2130 Fax: +81-3-5789-3372

URL: <http://www.kobelco-cranes.com/>

Inquiries To: