



SUPERLIFT 3800

715 USt capacity

Lattice Boom Crawler Crane

Datasheet

imperial

SUPERLIFT 3800



WORKS FOR YOU.™



CONTENTS

SUPERLIFT 3800

	Page:
Specifications	5
Superlift configurations	9
Specifications	10
Erection / lowering	12
Boom combinations	14
Main boom	
(SH, LH)	18
Main boom with SL	
(SSL, LSL)	23
Fixed fly jib	
(SH+LF, LH+LF)	29
Fixed fly jib with SL	
(SSL+LF, LSL+LF)	44
Luffing fly jib	
(SW)	88
Luffing fly jib with SL	
(SWSL / SFSL)	108
Fixed fly jib with SL	
(LVSL)	149
Technical description	152



KEY

SUPERLIFT 3800



Track



Counterweight + central ballast (ZB)



Superlift counterweight



Superlift radius



Possible load of hook block



Weight of hook block



Load radius



Main boom



Fly jib



Main boom angle



Fly jib angle



Wind speed in ft/s (feet per second)



Track shoe width

„D“



S: heavy

L: light

H: Main boom

W: Luffing fly jib

F: Fixed fly jib

SL: Superlift

V: Vessellift



Central ballast



HIGHLIGHTS

SUPERLIFT 3800

- ▶ 715 USt at 39.4 ft radius
- ▶ Load moment of 60.945 ft-kips
- ▶ Erection of wind turbines up to 383.9 ft hub height without superlift
- ▶ Erection of main boom 374.0 ft with 39.4 ft LF and hook block mounted: without superlift mast and without assist crane
- ▶ Erection of wind turbines up to 511.8 ft hub height with superlift
- ▶ Best in class ergonomics for operator
- ▶ Suitable for worldwide operation



SPECIFICATIONS

SUPERLIFT 3800

Working speeds (infinitely variable)

Mechanism		Rope ø	Speeds ¹⁾	Single line pull	Length of hoist rope
Hoist I+II	(H1+H2)	28 mm	max. 426.5 ft / min	40.500 lbf	3281 ft
Hoist III	(H3)	28 mm	max. 262.5 ft / min	40.500 lbf	2133 ft
Boom derricking	(W2)	28 mm	max. 426.5 ft / min		
Boom hoist	(E)	28 mm	max. 410.1 ft / min		
Jib luffing	(W1)	28 mm	max. 393.7 ft / min		
Slewing (rpm)			0 - 1		

¹⁾ top layer

Carrier performance

Travel speed	max. 0.68 mph
--------------	---------------

SPECIFICATIONS

SUPERLIFT 3800

Hook block system

Type	Possible load	Number of sheaves	Number of lines	Weight	„D“
2 x 325	1433,000 lb	4 x 5	2 x 20	22,270 lb – 29,110 lb	18.4 ft
	838,000 lb	1 x 10	1 x 21	16,100 lb – 24,920 lb (8,380 lb – 24,260 lb*)	18.4 ft (16.1 ft*)
2 x 190	838,000 lb	2 x 5	2 x 11	16,100 lb – 24,920 lb (8,380 lb – 24,260 lb*)	18.4 ft (16.1 ft*)
	419,000 lb	1 x 5	1 x 11	13,670 lb (5,950 lb – 10,580 lb*)	18.4 ft (17.1 ft*)

* with optional equipment 882,000 lb hook

Hook block

Type	Possible load	Number of sheaves	Number of lines	Weight	„D“
125	272,300 lb	3	1 x 7	4,000 lb – 11,250 lb	15.1 ft
54	119,000 lb	1	1 x 3	2,430 lb – 7,280 lb	15.1 ft
18*	39,700 lb	–	1 x 1	2,430 lb	12.5 ft


* Single line hook



SPECIFICATIONS

SUPERLIFT 3800

Basic crane dimensions

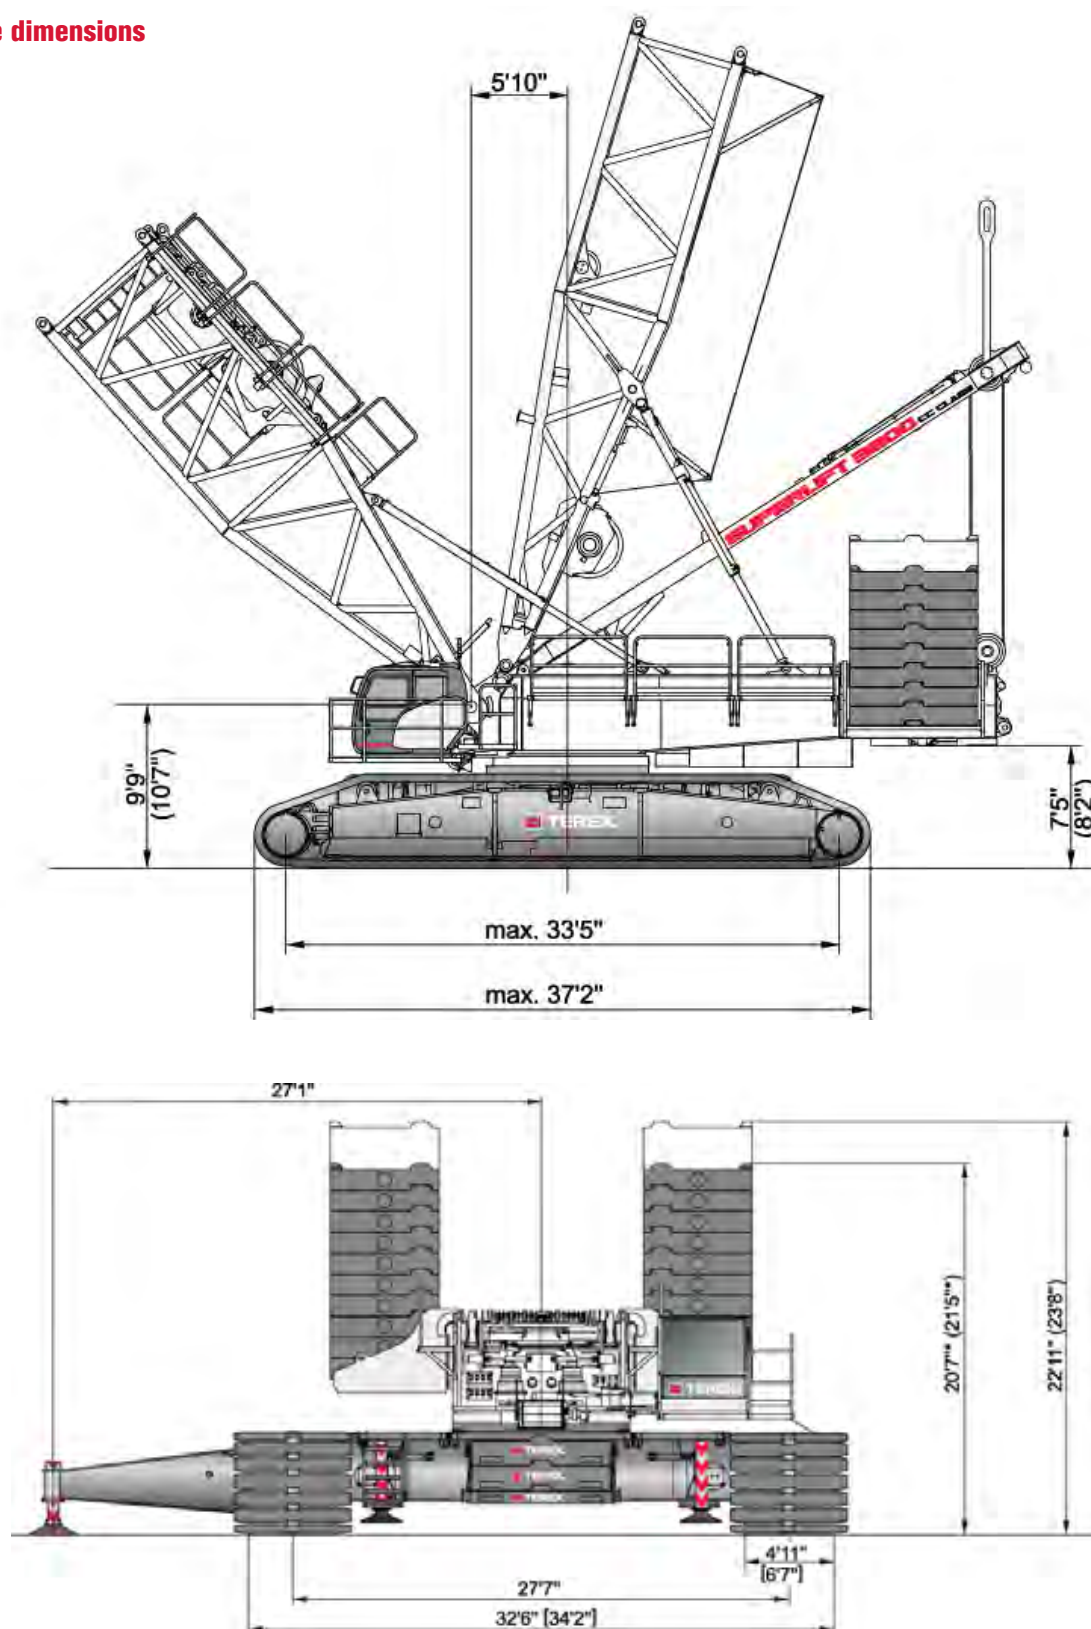


() with optional quick-connection

[] Option

* Optional cast iron

SPECIFICATIONS

SUPERLIFT 3800

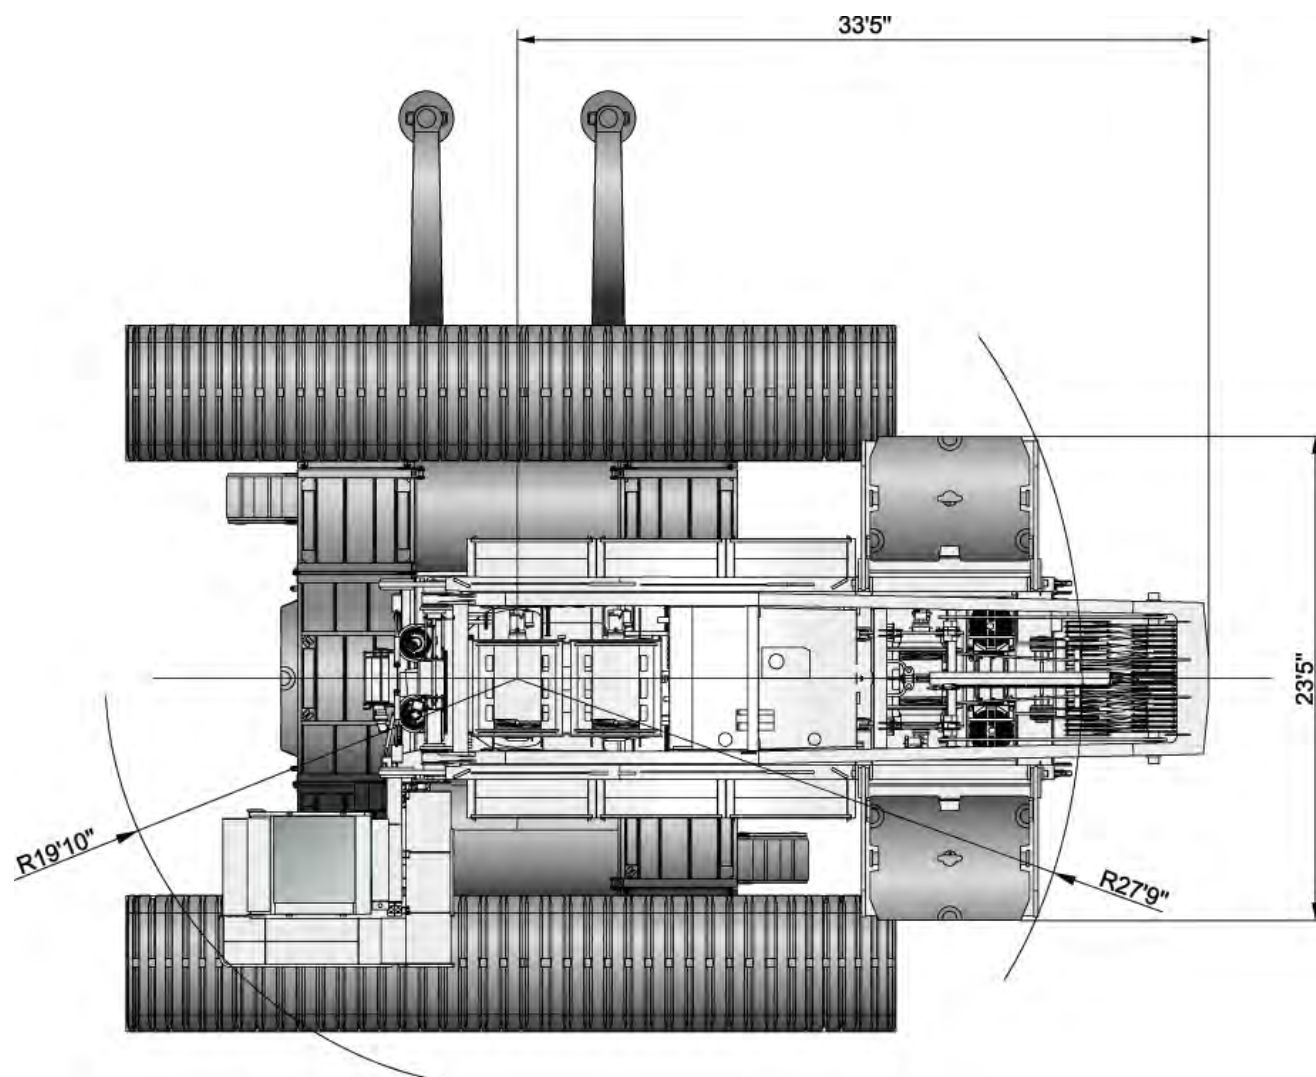


SUPERLIFT CONFIGURATIONS

SUPERLIFT 3800


SL 0 lb 29.5 ft

R 29.5 ft

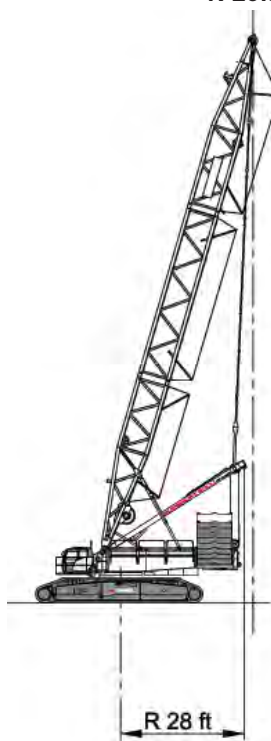


Standard-SL

R 37.7 50.8 64 ft
44.3 57.4

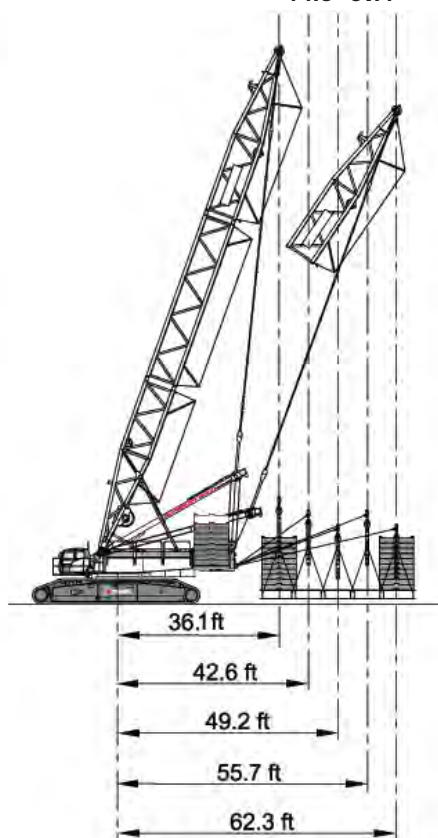


Vario-SL 36.1-62.3 ft

R 37.7 - 64 ft

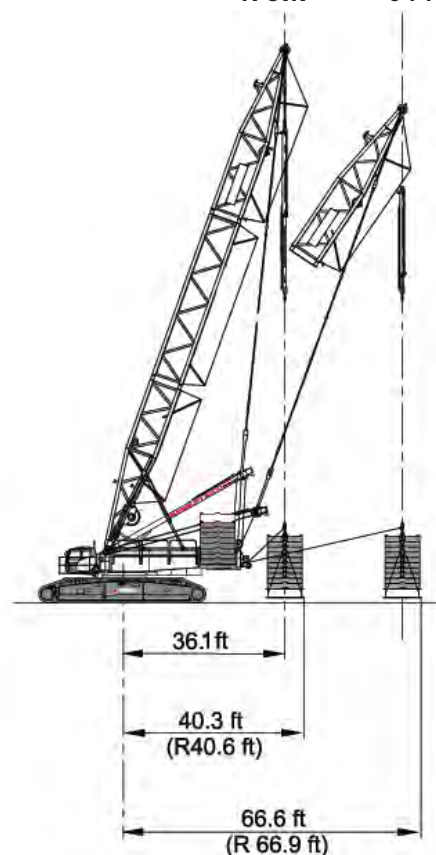

42.6-55.7 ft


R 51.7 ft

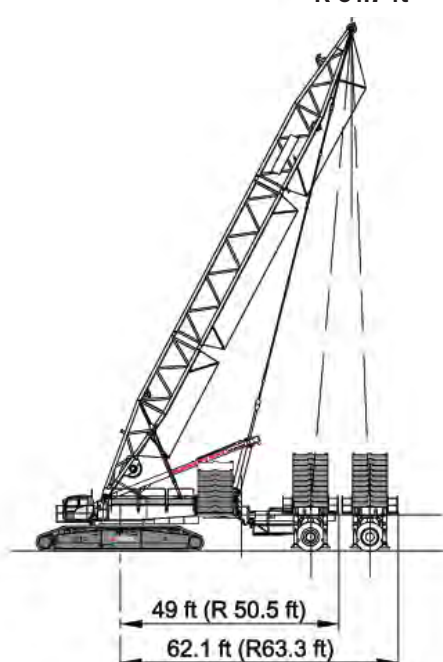

SL Carrier

49.2-62.3 ft

R 51.7 ft

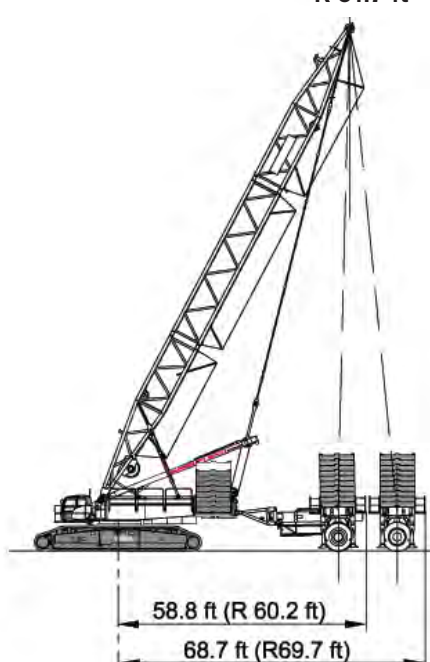

SPECIFICATIONS

SUPERLIFT 3800









Weights

Total weight incl. 363,800 lb counterweight, 78.7 ft boom and hook block	approx. 860,000 lb
Superstructure (with 3 winches, A-frame and quick-connection)	150,000 lb
Superstructure without winches and A-frame, with quick-connection	87,300 lb
Carbody with jacks and quick-connection	65,300 lb
Max. counterweight	452,000 lb
Max. central ballast	110,200 lb



SPECIFICATIONS


SUPERLIFT 3800

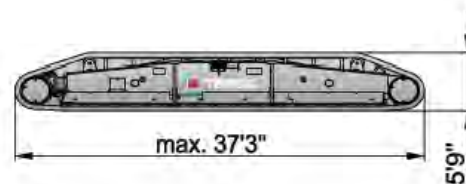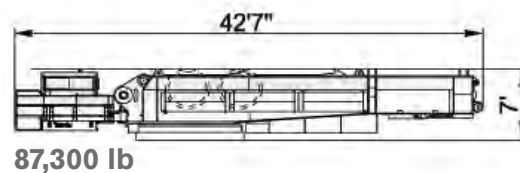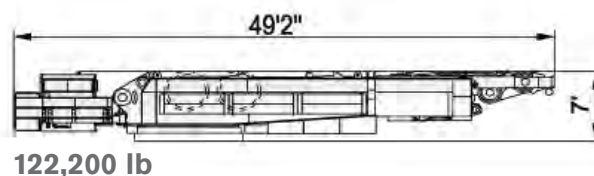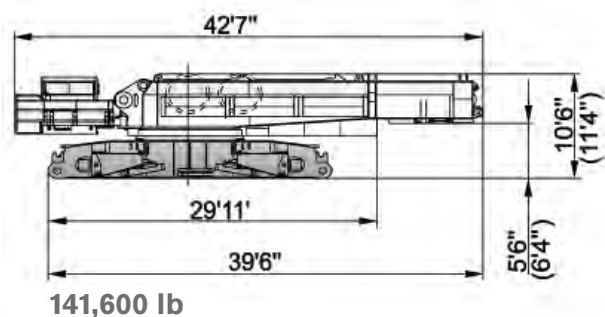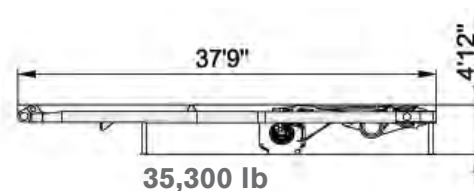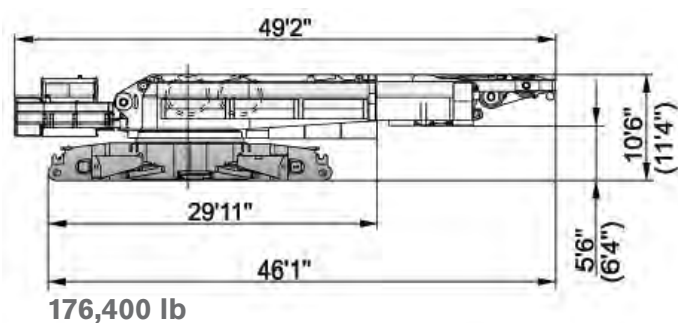

2 additional side jacks optional

	Duo	Quadro
4.9 ft	82,250 lb	89,700 lb
6.6 ft	86,000 lb	93,500 lb

Without winches H1 + H2 (14,110 lb each)

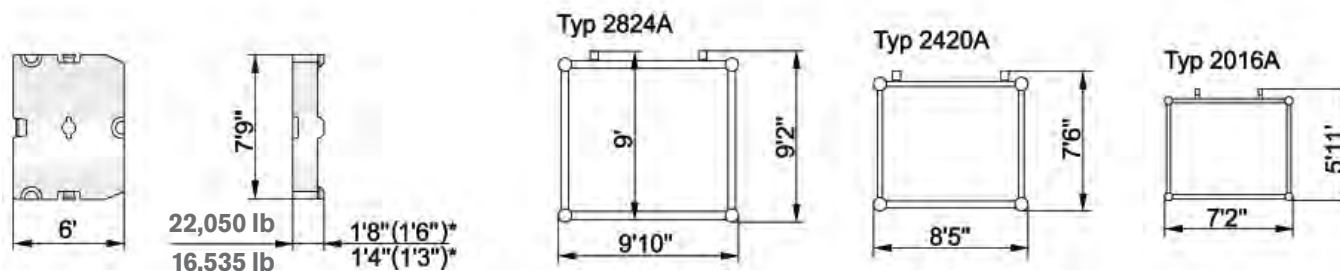

* Optional cast iron

ERECTION / LOWERING

SUPERLIFT 3800

Erection / lowering of the Superlift 3800 boom systems to the ground

Boom combination	Fly jib	Main boom																
		ft	78.7	98.4	118.1	137.8	157.5	177.2	196.9	216.5	236.2	255.9	275.6	295.3	315.0	334.6	354.3	374.0
SH_1			X	X	X	X	X	X	X	X	X	[X]	[X]	[X]	[X]	–	–	–
LH_1			–	–	X	X	X	X	X	X	X	X	X	[X]	[X]	[X]	[X]	[X]
SW_1  65°, 75°, 85°, 87°	78.7 ft		X	X	X	X	X	[X]	[X]	[X]	–	–	–	–	–	–	–	–
	98.4 ft		X	X	X	X	X	[X]	[X]	[X]	–	–	–	–	–	–	–	–
	118.1 ft		X	X	X	X	X	[X]	[X]	[X]	–	–	–	–	–	–	–	–
	137.8 ft		X	X	X	X	X	X	[X]	[X]	[X]	–	–	–	–	–	–	–
	157.5 ft		X	X	X	X	X	X	[X]	[X]	[X]	–	–	–	–	–	–	–
	177.2 ft		X	X	X	X	X	X	[X]	[X]	[X]	[X]	–	–	–	–	–	–
	196.9 ft		X	X	X	X	X	X	[X]	[X]	[X]	[X]	–	–	–	–	–	–
	216.5 ft		X	X	X	X	X	X	[X]	[X]	[X]	[X]	–	–	–	–	–	–
	236.2 ft		X	X	X	X	X	X	[X]	[X]	[X]	–	–	–	–	–	–	–
	255.9 ft		X	X	X	X	X	X	[X]	[X]	[X]	–	–	–	–	–	–	–
	275.6 ft		X	X	X	X	X	X	[X]	[X]	[X]	–	–	–	–	–	–	–
	295.3 ft		X	X	X	X	X	X	[X]	[X]	[X]	–	–	–	–	–	–	–
	315.0 ft		X	X	X	X	[X]	[X]	[X]	[X]	[X]	–	–	–	–	–	–	–
SH+LF_1  15°, 20°, 30°	39.4 ft		–	X	X	X	X	X	X	X	X	[X]	[X]	[X]	[X]	–	–	–
	78.7 ft		–	X	X	X	X	X	X	X	X	[X]	[X]	[X]	[X]	–	–	–
	118.1 ft		–	X	X	X	X	X	X	X	X	[X]	[X]	[X]	–	–	–	–
LH+LF_1  15°, 20°, 30°	39.4 ft		–	–	–	–	X	X	X	X	X	X	X	[X]	[X]	[X]	[X]	[X]
	78.7 ft		–	–	–	–	X	X	X	X	X	X	[X]	[X]	[X]	[X]	[X]	–
	118.1 ft		–	–	–	–	X	X	X	X	X	[X]	[X]	[X]	[X]	[X]	–	–
		ft			236.2	246.1	255.9	265.8	275.6	285.5	295.3	305.1	315.0	324.8	334.6	344.5	354.3	364.2
LH+LF_3  15°, 20°	39.4 ft				X	X	X	X	X	[X]	[X]	[X]	[X]	[X]	[X]	[X]	[X]	[X]

X without assisting equipment

[X] with additional side jack

All Superlift combinations can be erected or lowered to the ground without assisting equipment.



ERECTION / LOWERING

SUPERLIFT 3800

Erection / lowering of the Superlift 3800 boom systems to the ground

Boom combination	Fly jib	Main boom																	
		ft	118.1	137.8	157.5	177.2	196.9	216.5	236.2	255.9	275.6	295.3	315.0	334.6	354.3	374.0	393.7	413.4	433.1
SSL_1			X	X	X	X	X	X	X	X	X	X	X	X	X	-	-	-	-
LSL_1			-	-	-	-	-	-	X	X	X	X	X	X	X	X	X	X	X
LSL_2			-	-	-	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LVSL_1 15°	59.0 ft		X	X	X	X	X	X	X	X	X	X	X	X	X	-	-	-	-
SWSL_1 55°, 65°, 75°, 85°, 87°	78.7 ft		X	X	X	X	X	X	X	X	X	X	X	-	-	-	-	-	-
	98.4 ft		X	X	X	X	X	X	X	X	X	X	X	-	-	-	-	-	-
	118.1 ft		X	X	X	X	X	X	X	X	X	X	X	X	X	-	-	-	-
	137.8 ft		X	X	X	X	X	X	X	X	X	X	X	X	X	-	-	-	-
SFSL_1 15°	157.5 ft		X	X	X	X	X	X	X	X	X	X	X	X	X	-	-	-	-
	177.2 ft		X	X	X	X	X	X	X	X	X	X	X	X	X	-	-	-	-
	196.9 ft		X	X	X	X	X	X	X	X	X	X	X	X	X	-	-	-	-
	216.5 ft		X	X	X	X	X	X	X	X	X	X	X	X	-	-	-	-	-
	236.2 ft		X	X	X	X	X	X	X	X	X	X	X	X	-	-	-	-	-
	255.9 ft		X	X	X	X	X	X	X	X	X	X	X	X	-	-	-	-	-
	275.6 ft		X	X	X	X	X	X	X	X	X	X	X	X	-	-	-	-	-
	295.3 ft		X	X	X	X	X	X	X	X	X	X	X	X	-	-	-	-	-
	315.0 ft		X	X	X	X	X	X	X	X	X	X	X	-	-	-	-	-	-
		ft	255.9	275.6	295.3	315.0	334.6	354.3	364.2	374.0	383.9	393.7	403.6	413.4	423.3	433.1	442.9	452.8	462.6
SSL+LF_1 15°, 20°, 30°	39.4 ft		-	X	X	X	X	X	X	X	X	X	X	X	X	-	-	-	-
	78.7 ft		-	X	X	X	X	X	X	X	X	X	X	X	X	-	-	-	-
	118.1 ft		-	X	X	X	X	X	X	X	X	X	X	X	X	-	-	-	-
LSL+LF_2 15°, 20°, 30°	39.4 ft		-	-	-	-	-	-	X	X	X	X	X	X	X	X	X	X	X
	78.7 ft		-	-	-	-	-	-	X	X	X	X	X	X	X	X	X	X	X
	118.1 ft		-	-	-	-	-	-	X	X	X	X	X	X	X	X	X	X	X
		ft	255.9	275.6	295.3	315.0	334.6	354.3	364.2	374.0	383.9	393.7	403.6	413.4	423.3	433.1	442.9	452.8	462.6
LSL+LF_3 15°, 20°	39.4 ft		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	-
LSL+LF_4 15°, 20°	39.4 ft		-	-	-	-	-	-	-	-	-	-	-	-	-	X	X	X	X

X without assisting equipment

The amount of Superlift counterweight required for erecting the boom system depends on the configuration and the Superlift radius.


BOOM COMBINATIONS

SUPERLIFT 3800




* Attachable

Runner
119,000 lb



LH, LSL, SW, SWSL, LVSL

SH, SSL

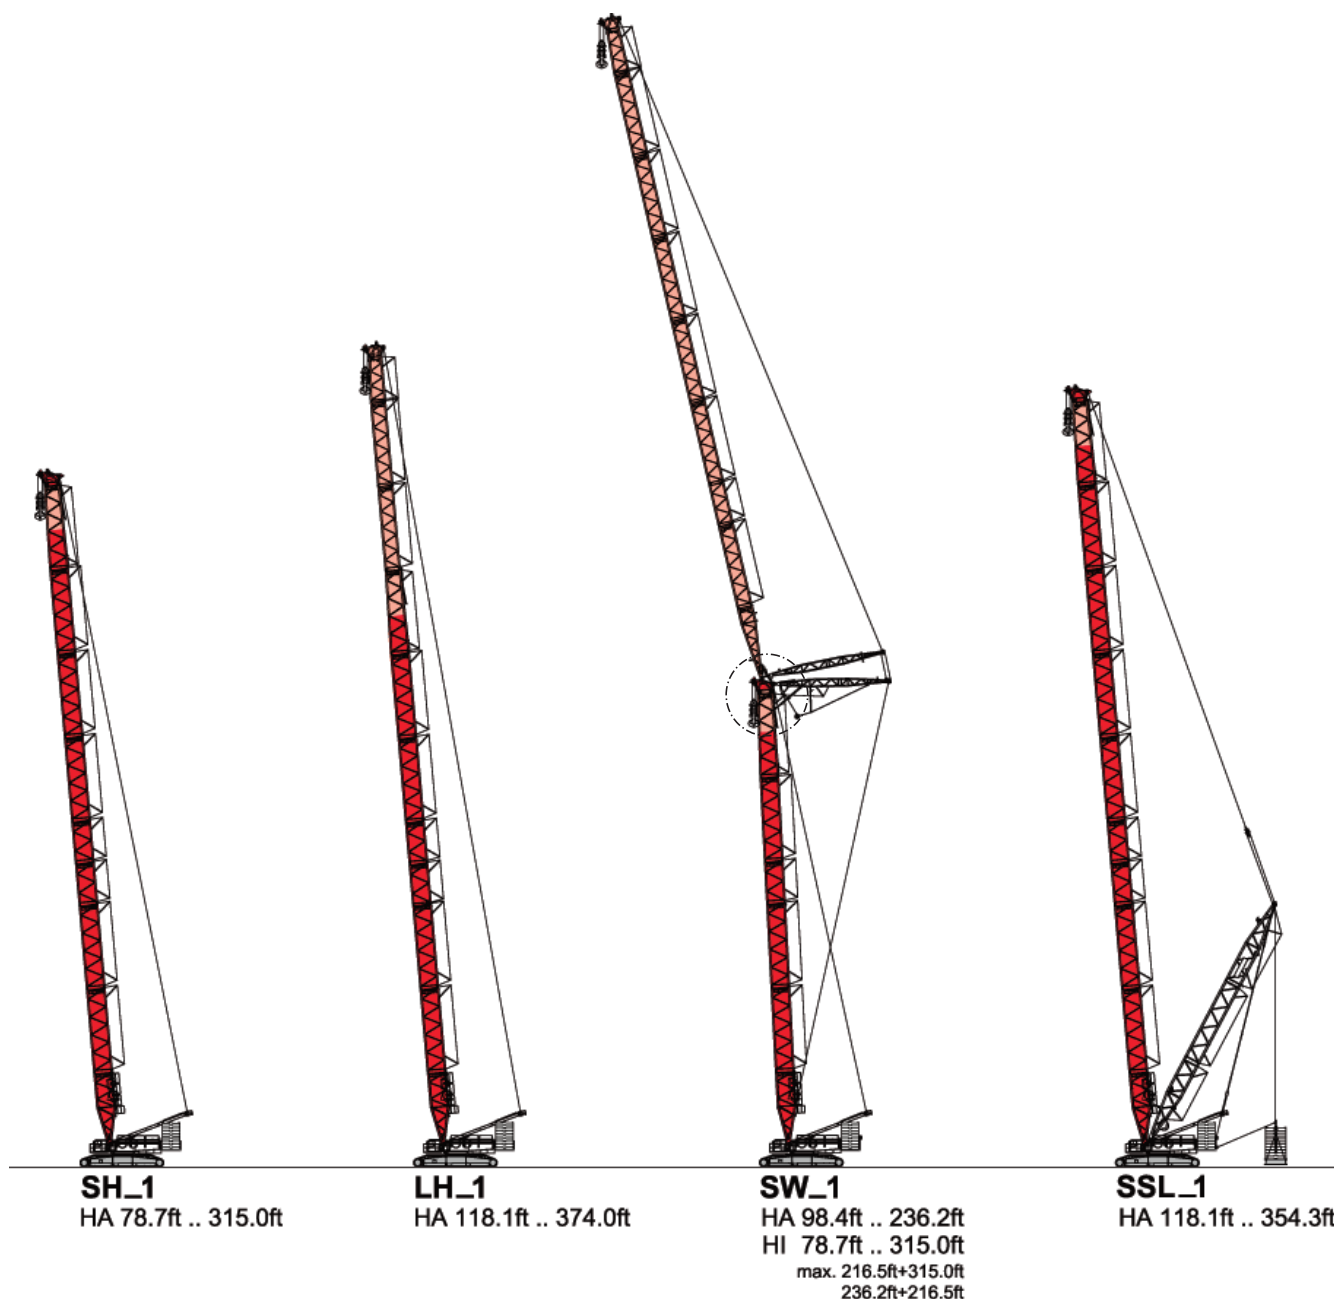


BOOM COMBINATIONS

SUPERLIFT 3800




* Attachable

Runner
119,000 lb



LH, LSL, SW, SWSL, LVSL

SH, SSL

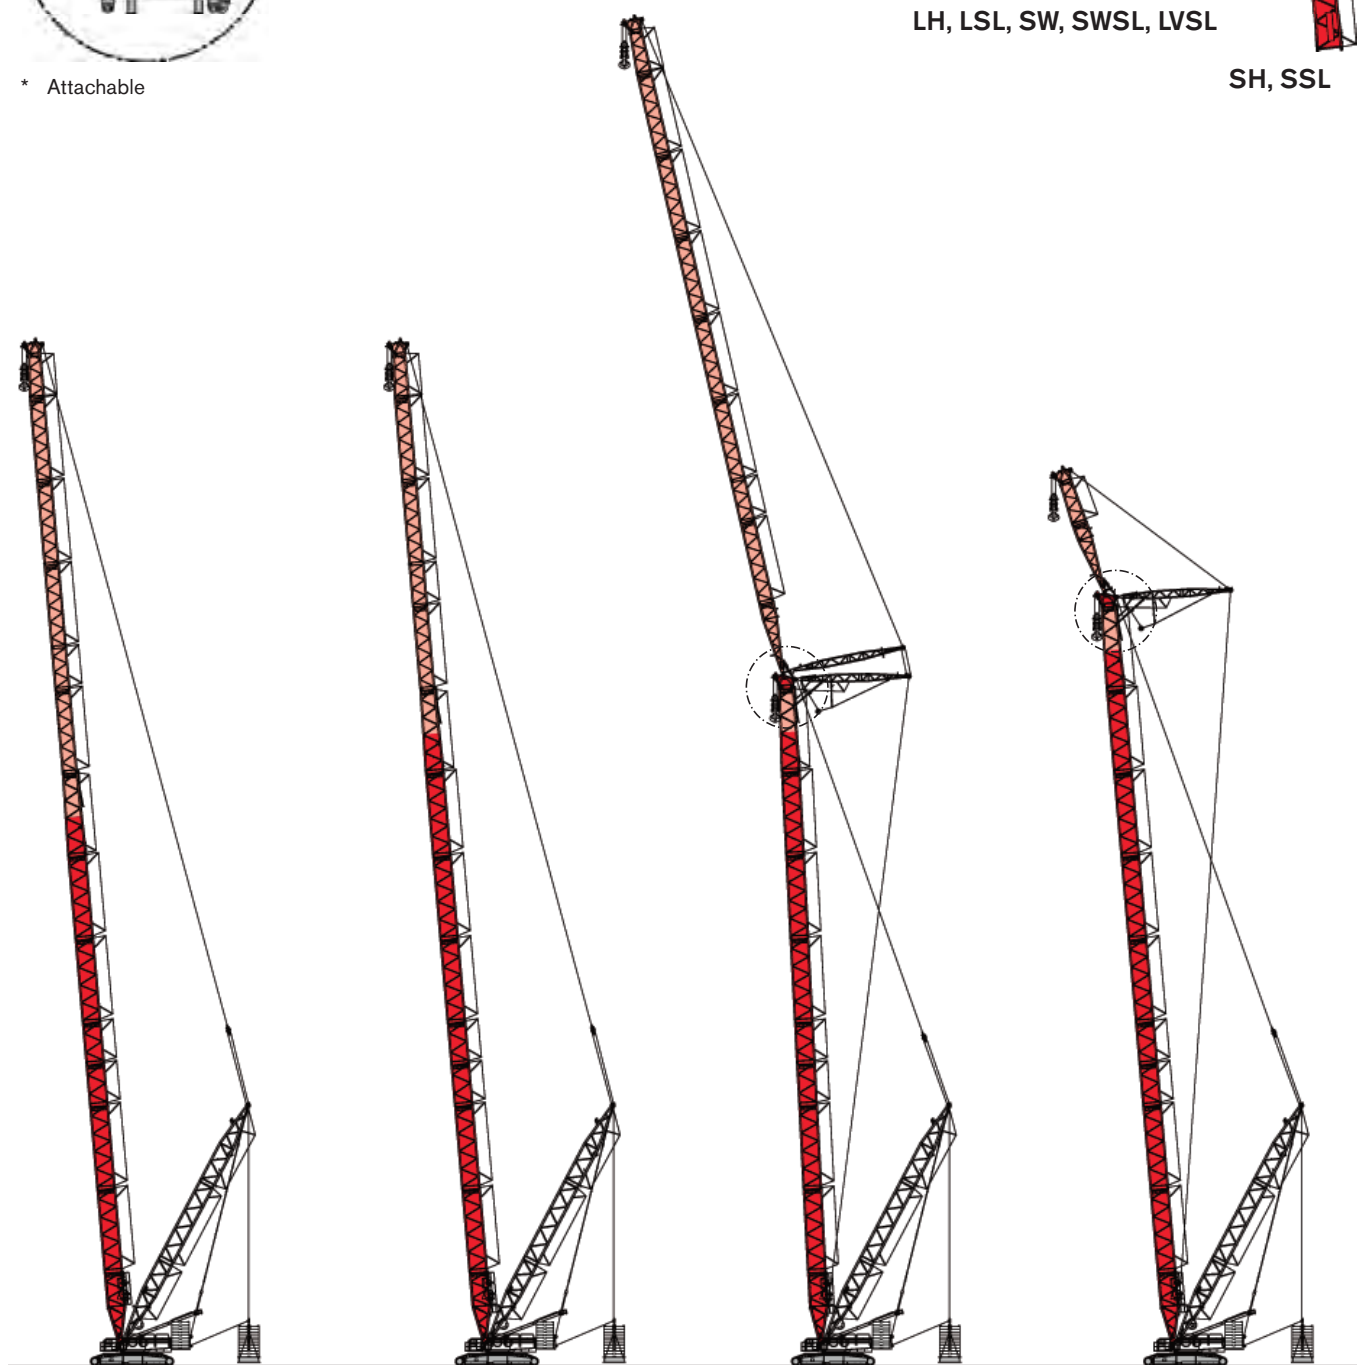

LSL_1

HA 236.2ft .. 472.4ft

LSL_2

HA 177.2ft .. 472.4ft

SWSL_1

HA 118.1ft .. 354.3ft
HI 78.7ft .. 315.0ft
max. 315.0ft+315.0ft
334.6ft+295.3ft
354.3ft+196.9ft



LVSL_1

HA 118.1ft .. 354.3ft
HI 59.0ft




BOOM COMBINATIONS

SUPERLIFT 3800




* Attachable
** Option

Runner 39,700 lb on LF standard

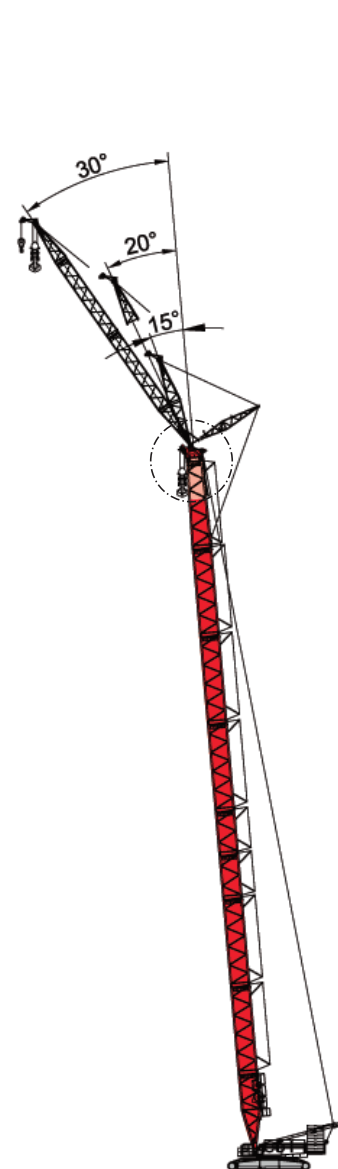


SH+LF_1

HA 98.4ft .. 315.0ft
HI 39.4ft .. 118.1ft
max. 275.6ft+118.1ft
295.3ft+78.7ft
315.0ft+39.4ft

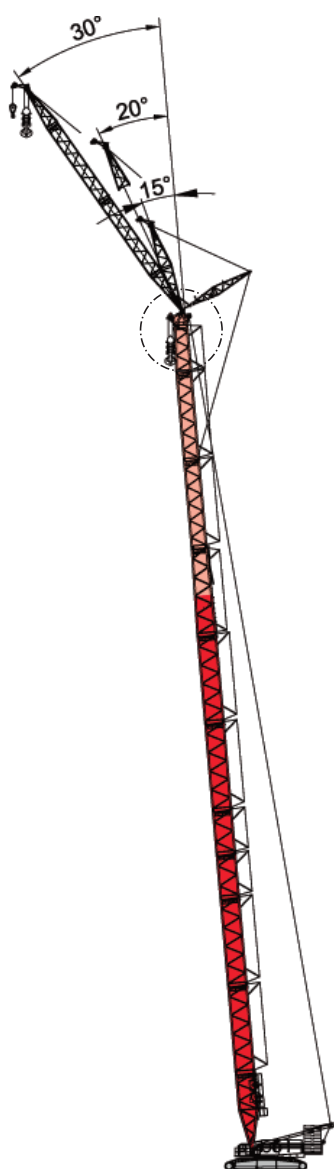

LH+LF_1

HA 157.5ft .. 374.0ft
HI 39.4ft .. 118.1ft
max. 334.6ft+118.1ft
354.3ft+78.7ft
374.0ft+39.4ft

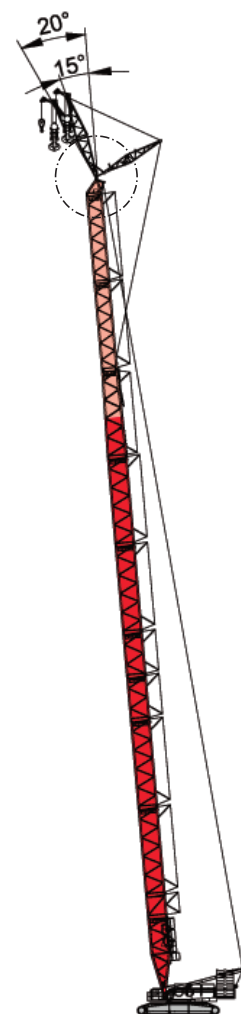

LH+LF_3

HA 236.2ft .. 364.2ft
HI 39.4ft





TEREX




BOOM COMBINATIONS

SUPERLIFT 3800



- * Attachable
- ** Option

Runner 39,700 lb on LF standard

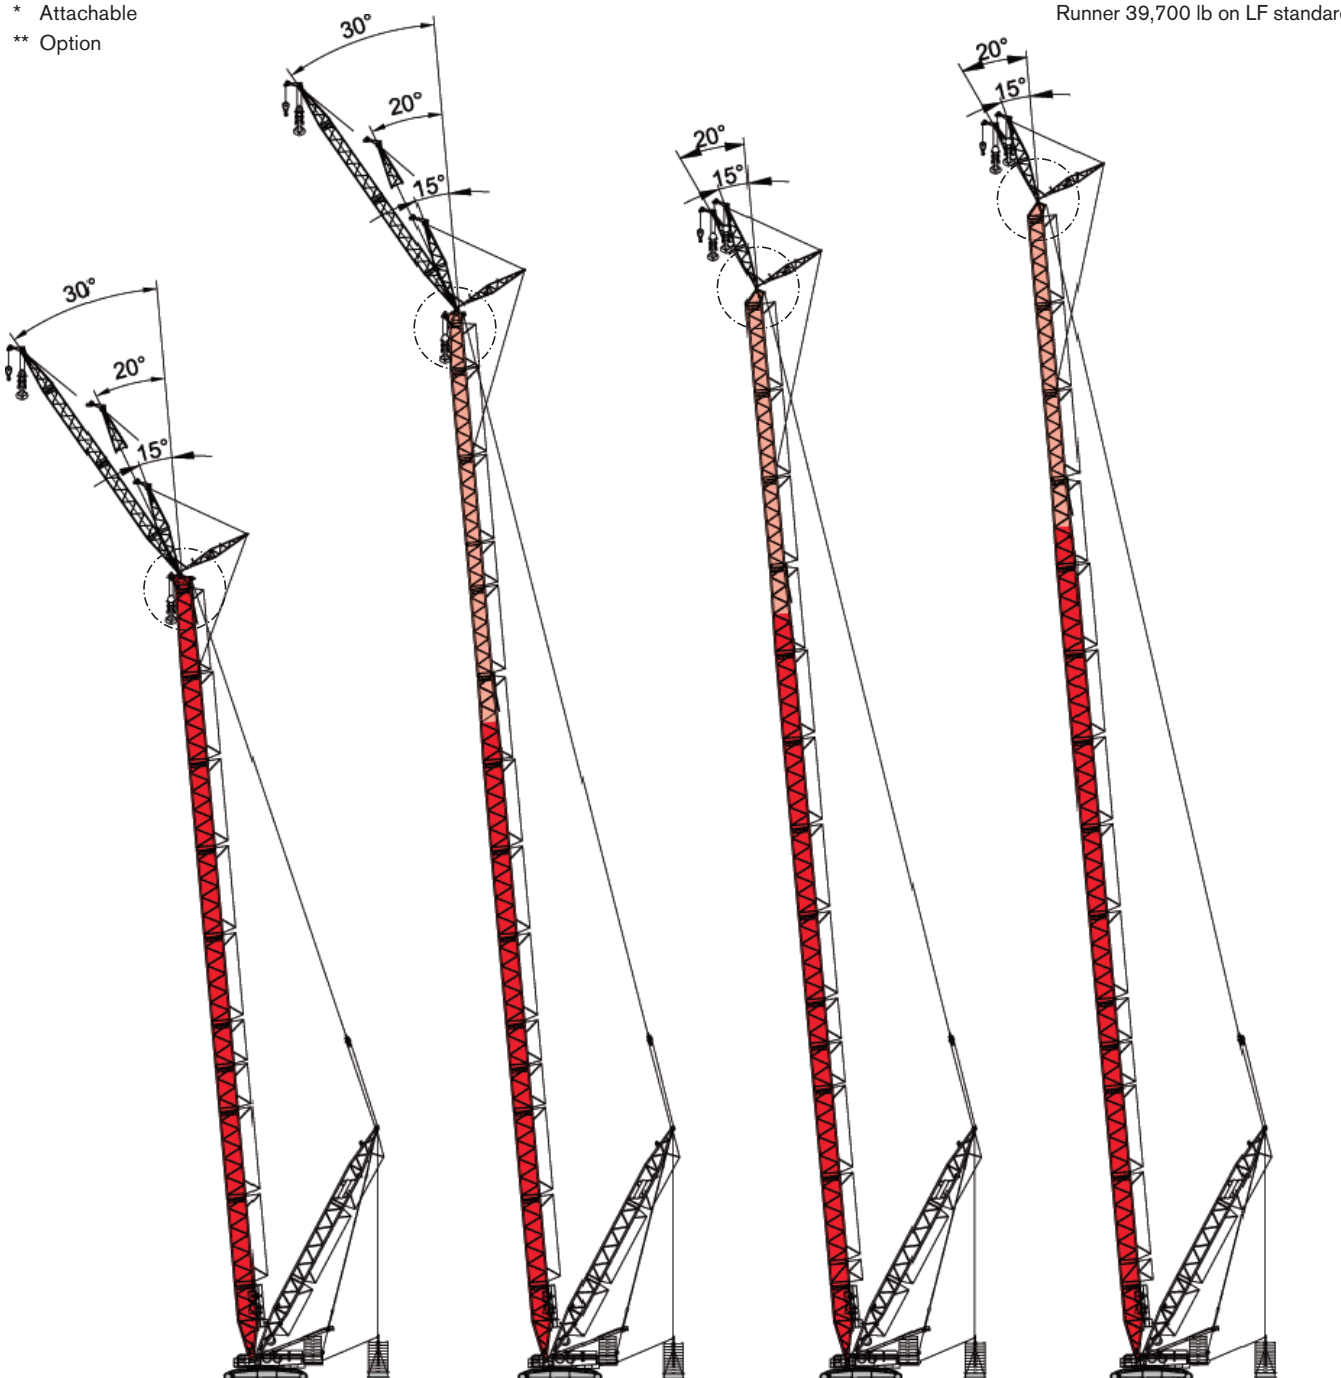

SSL+LF_1

HA 137.8ft .. 354.3ft
HI 39.4ft .. 118.1ft

LSL+LF_2

HA 236.2ft .. 472.4ft
HI 39.4ft .. 118.1ft

LSL+LF_3

HA 255.9ft .. 482.3ft
HI 39.4ft


LSL+LF_4

HA 452.8ft .. 521.7ft
HI 39.4ft



SH, LH

SUPERLIFT 3800

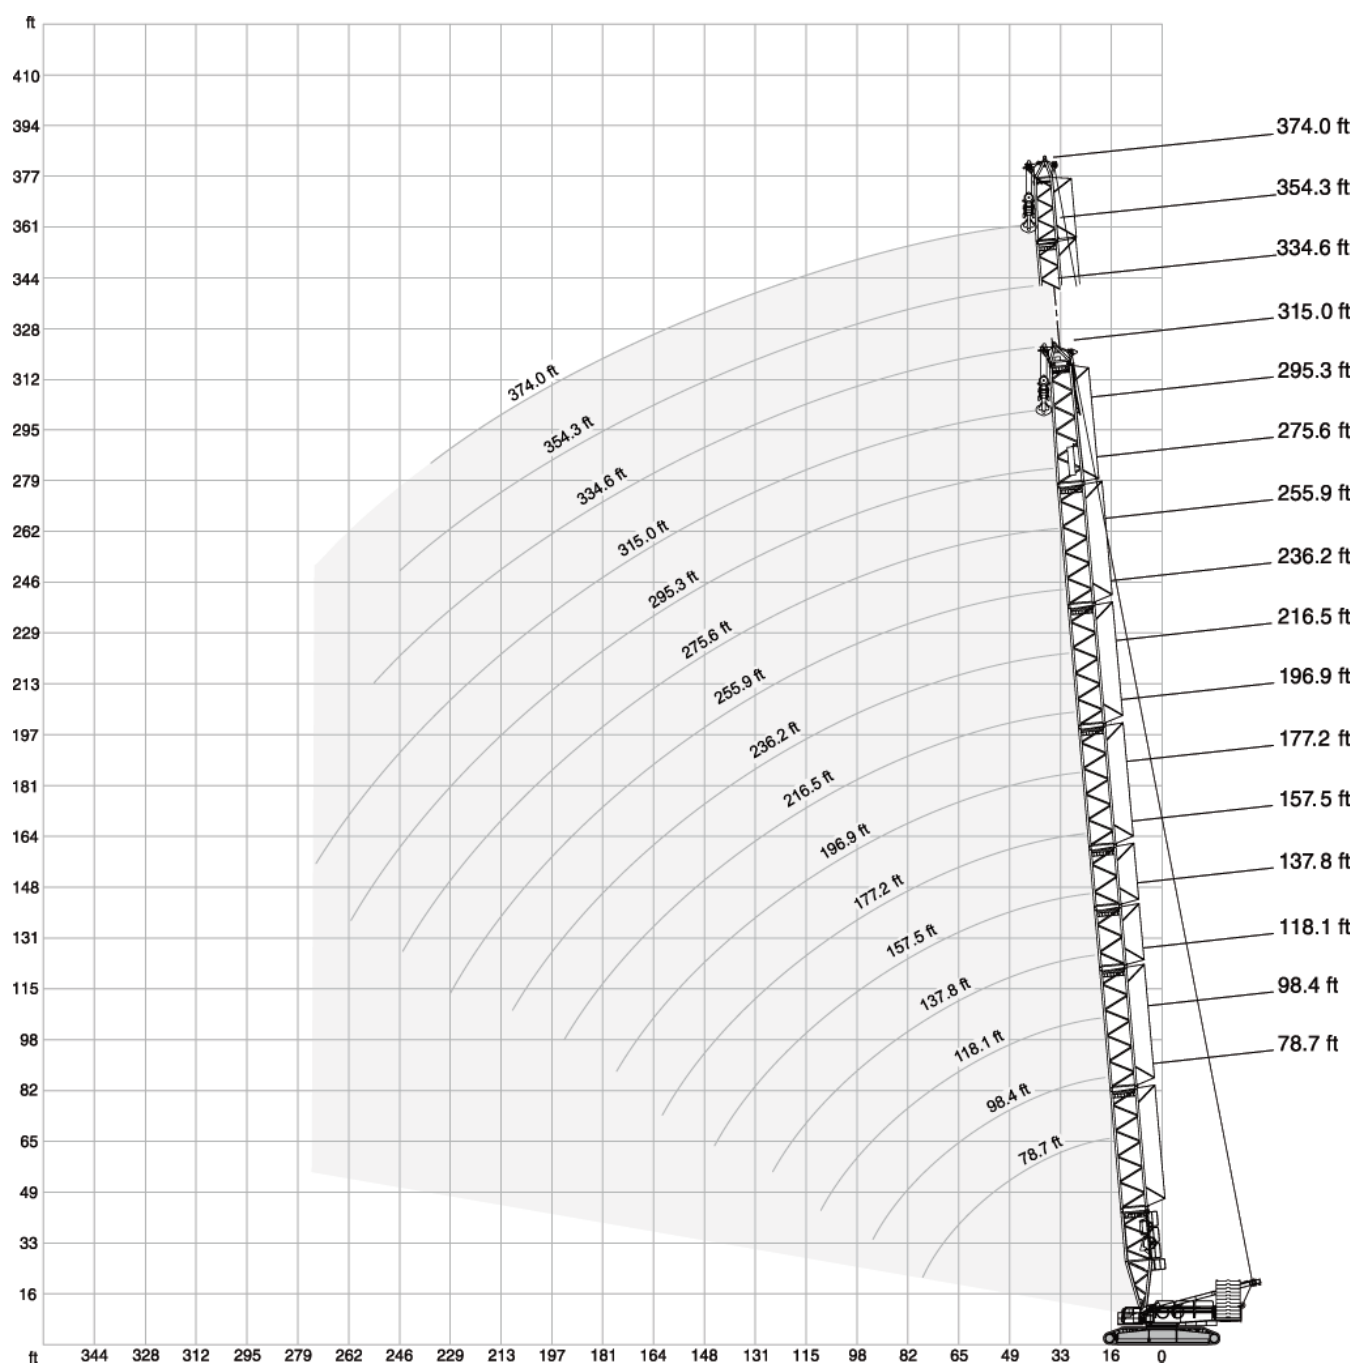

SH

SUPERLIFT 3800

 27.6 ft  32.2 ft/s 360° 75%														
SH_1														
ft	78.7	98.4	118.1	137.8	157.5	177.2	196.9	216.5	236.2	255.9	275.6	295.3	315.0	ft
18.0	1406.6	-	-	-	-	-	-	-	-	-	-	-	-	18.0
19.7	1327.2	1320.6	-	-	-	-	-	-	-	-	-	-	-	19.7
23.0	1190.5	1186.1	1179.5	1095.7	-	-	-	-	-	-	-	-	-	23.0
26.2	1064.8	1060.4	1007.5	937.0	873.0	817.9	-	-	-	-	-	-	-	26.2
29.5	941.4	934.8	870.8	815.7	765.0	720.9	679.0	-	-	-	-	-	-	29.5
32.8	842.2	815.7	767.2	723.1	681.2	643.8	610.7	579.8	551.2	-	-	-	-	32.8
36.1	744.1	729.7	691.1	653.7	618.4	586.4	556.7	530.2	504.9	480.6	456.4	-	-	36.1
39.4	646.0	643.8	615.1	584.2	555.6	529.1	502.7	480.6	458.6	440.9	421.1	405.7	385.8	39.4
45.9	502.7	502.7	500.4	489.4	467.4	445.3	425.5	410.1	390.2	377.0	359.4	348.3	332.9	45.9
52.5	410.1	407.9	407.9	403.4	401.2	383.6	368.2	352.7	339.5	326.3	313.1	304.2	291.0	52.5
59.1	346.1	343.9	341.7	337.3	337.3	335.1	321.9	310.9	297.6	286.6	275.6	266.8	255.7	59.1
65.6	297.6	293.2	291.0	288.8	286.6	284.4	282.2	275.6	262.4	255.7	244.7	238.1	227.1	65.6
72.2	260.1	255.7	253.5	251.3	249.1	246.9	244.7	242.5	233.7	227.1	218.3	212.7	202.8	72.2
75.5	244.7	241.4	239.2	235.9	234.2	232.0	229.3	228.2	222.1	216.1	207.2	202.3	192.9	75.5
78.7	-	227.1	224.9	220.5	219.4	217.2	213.8	213.8	210.5	205.0	196.2	191.8	183.0	78.7
85.3	-	202.8	199.5	196.2	194.0	191.8	189.6	188.5	185.2	184.1	177.5	173.1	164.2	85.3
91.9	-	183.0	179.7	176.4	174.2	170.9	168.7	167.6	165.3	164.2	160.9	156.5	148.8	91.9
98.4	-	-	163.1	159.8	156.5	154.3	151.0	149.9	147.7	146.6	143.3	143.3	135.6	98.4
108.3	-	-	142.2	139.2	135.9	133.7	130.3	129.2	125.7	124.6	122.4	122.4	118.2	108.3
111.5	-	-	-	132.3	129.0	126.8	123.5	122.4	120.2	117.9	115.7	115.7	112.4	111.5
124.7	-	-	-	112.4	109.3	106.3	103.4	102.1	99.0	97.4	94.1	93.5	90.6	124.7
137.8	-	-	-	-	93.5	89.9	86.9	85.1	81.4	79.8	76.5	75.6	72.8	137.8
144.4	-	-	-	-	86.9	83.4	79.7	77.6	74.3	72.6	69.3	68.5	65.5	144.4
150.9	-	-	-	-	-	76.9	73.0	71.0	67.2	65.5	62.2	61.3	58.2	150.9
160.8	-	-	-	-	-	68.6	64.5	62.4	58.5	56.7	53.1	52.4	49.4	160.8
164.0	-	-	-	-	-	-	61.7	59.5	55.6	53.8	50.3	49.6	46.5	164.0
177.2	-	-	-	-	-	-	52.5	50.0	46.1	44.1	40.6	39.7	36.6	177.2
190.3	-	-	-	-	-	-	-	42.3	37.9	36.2	32.4	31.5	28.2	190.3
193.6	-	-	-	-	-	-	-	40.6	36.2	34.4	30.6	29.8	26.4	193.6
203.4	-	-	-	-	-	-	-	-	31.1	29.1	25.4	24.5	20.9	203.4
210.0	-	-	-	-	-	-	-	-	28.2	26.2	22.3	21.4	17.9	210.0
216.5	-	-	-	-	-	-	-	-	-	23.4	19.4	18.3	14.8	216.5
223.1	-	-	-	-	-	-	-	-	-	20.9	16.8	15.7	12.1	223.1
229.7	-	-	-	-	-	-	-	-	-	-	18.3	14.1	13.0	229.7
232.9	-	-	-	-	-	-	-	-	-	-	-	13.0	11.9	232.9
236.2	-	-	-	-	-	-	-	-	-	-	-	11.9	-	236.2

	408,000 lb	452,000 lb
	66,100 lb	110,200 lb



SUPERLIFT 3800

 275,600 lb 363,800 lb



LH

SUPERLIFT 3800

 + 		 27.6 ft					 32.2 ft/s					360°					75%	
 		LH_1																
ft		118.1	137.8	157.5	177.2	196.9	216.5	236.2	255.9	275.6	295.3	315.0	334.6	354.3	374.0	ft		
		1,000 lb																
23.0		765.0	765.0	-	-	-	-	-	-	-	-	-	-	-	-	-	23.0	
26.2		765.0	765.0	765.0	765.0	-	-	-	-	-	-	-	-	-	-	-	26.2	
29.5		765.0	765.0	765.0	734.1	692.3	654.8	-	-	-	-	-	-	-	-	-	29.5	
32.8		765.0	729.7	694.5	657.0	621.7	590.8	562.2	535.7	-	-	-	-	-	-	-	32.8	
36.1		694.5	660.3	631.6	599.7	568.8	542.3	517.0	493.8	456.4	421.1	-	-	-	-	-	36.1	
39.4		623.9	590.8	568.8	542.3	515.9	493.8	471.8	451.9	434.3	412.3	352.7	321.9	-	-	-	39.4	
42.7		566.6	543.4	524.7	500.4	478.4	457.5	438.7	420.0	404.5	385.8	347.2	316.4	297.6	271.2	-	42.7	
45.9		509.3	496.0	480.6	458.6	440.9	421.1	405.7	388.0	374.8	359.4	341.7	310.9	295.4	269.0	-	45.9	
52.5		416.7	414.5	414.5	396.8	381.4	366.0	352.7	339.5	328.5	315.3	304.2	291.0	280.0	262.4	-	52.5	
59.1		350.5	346.1	348.3	346.1	335.1	321.9	310.9	299.8	291.0	277.8	269.0	257.9	246.9	238.1	-	59.1	
65.6		299.8	297.6	299.8	297.6	295.4	286.6	277.8	266.8	260.1	249.1	240.3	231.5	222.7	212.7	-	65.6	
72.2		262.4	260.1	262.4	257.9	255.7	253.5	249.1	240.3	233.7	224.9	217.2	208.3	199.5	190.7	-	72.2	
78.7		233.7	229.3	231.5	227.1	227.1	222.7	222.7	217.2	211.6	202.8	196.2	188.5	180.8	173.1	-	78.7	
85.3		208.3	205.0	207.2	203.9	201.7	198.4	197.3	195.1	192.9	185.2	178.6	170.9	164.2	156.5	-	85.3	
91.9		188.5	185.2	186.3	183.0	181.9	177.5	176.4	174.2	174.2	168.7	163.1	156.5	148.8	142.2	-	91.9	
98.4		172.0	167.6	169.8	166.4	164.2	160.9	158.7	156.5	156.5	153.2	149.9	143.3	136.7	130.1	-	98.4	
108.3		151.0	147.7	149.1	145.8	143.6	139.4	138.1	135.9	135.9	132.6	130.9	125.9	119.6	114.0	-	108.3	
111.5		-	141.1	142.2	138.9	136.7	132.3	131.2	129.0	129.0	125.7	124.6	120.2	114.6	108.7	-	111.5	
124.7		-	120.2	121.3	117.9	115.7	111.3	110.2	107.8	107.8	104.5	103.6	100.3	97.4	91.5	-	124.7	
137.8		-	-	105.8	102.1	99.4	95.7	93.9	91.1	91.1	87.5	86.4	82.5	80.2	76.5	-	137.8	
141.1		-	-	102.5	98.9	96.0	92.4	90.6	87.6	87.6	83.9	82.8	78.7	76.5	72.9	-	141.1	
150.9		-	-	-	89.3	86.4	82.5	80.7	77.4	77.4	73.2	72.1	68.1	65.9	61.9	-	150.9	
160.8		-	-	-	81.4	78.3	74.4	72.1	68.6	68.5	64.4	63.2	59.2	57.0	52.9	-	160.8	
164.0		-	-	-	-	75.6	71.7	69.2	65.7	65.5	61.5	60.2	56.2	54.0	49.8	-	164.0	
177.2		-	-	-	-	67.0	62.2	59.7	56.0	55.8	51.6	50.3	46.3	43.9	39.9	-	177.2	
190.3		-	-	-	-	-	54.5	51.6	47.8	47.6	43.4	41.9	37.9	35.5	31.5	-	190.3	
193.6		-	-	-	-	-	52.7	49.9	46.1	45.8	41.6	40.1	36.1	33.7	29.5	-	193.6	
203.4		-	-	-	-	-	-	45.0	41.0	40.6	36.2	34.8	30.6	28.2	24.3	-	203.4	
210.0		-	-	-	-	-	-	42.1	38.0	37.6	33.2	31.7	27.6	25.1	21.1	-	210.0	
216.5		-	-	-	-	-	-	-	35.1	34.6	30.2	28.7	24.5	22.0	17.9	-	216.5	
226.4		-	-	-	-	-	-	-	31.3	30.6	26.2	24.6	20.5	17.9	13.7	-	226.4	
229.7		-	-	-	-	-	-	-	-	29.3	24.9	23.4	19.2	16.5	12.3	-	229.7	
236.2		-	-	-	-	-	-	-	-	27.1	22.6	20.9	16.8	14.1	9.9	-	236.2	
242.8		-	-	-	-	-	-	-	-	24.9	20.3	18.5	14.3	11.7	-	-	242.8	
246.1		-	-	-	-	-	-	-	-	23.8	19.3	17.5	13.3	10.6	-	-	246.1	
249.3		-	-	-	-	-	-	-	-	-	18.4	16.5	12.2	9.5	-	-	249.3	
255.9		-	-	-	-	-	-	-	-	-	16.5	14.6	10.1	-	-	-	255.9	
259.2		-	-	-	-	-	-	-	-	-	15.7	13.6	9.3	-	-	-	259.2	
262.5		-	-	-	-	-	-	-	-	-	14.8	12.7	-	-	-	-	262.5	
269.0		-	-	-	-	-	-	-	-	-	-	10.8	-	-	-	-	269.0	
275.6		-	-	-	-	-	-	-	-	-	-	9.3	-	-	-	-	275.6	

	408,000 lb	452,000 lb
	66,100 lb	110,200 lb



LH

SUPERLIFT 3800


  27.6 ft  32.2 ft/s 360° 75%															
LH_1															
ft	118.1	137.8	157.5	177.2	196.9	216.5	236.2	255.9	275.6	295.3	315.0	334.6	354.3	374.0	ft
1,000 lb															
23.0	765.0	765.0	-	-	-	-	-	-	-	-	-	-	-	-	23.0
26.2	765.0	745.2	701.1	654.8	-	-	-	-	-	-	-	-	-	-	26.2
29.5	694.5	650.4	615.1	579.8	546.7	515.9	-	-	-	-	-	-	-	-	29.5
32.8	610.7	575.4	546.7	518.1	489.4	465.2	440.9	418.9	-	-	-	-	-	-	32.8
36.1	551.2	520.3	497.1	471.8	447.5	425.5	404.5	384.7	366.0	348.3	-	-	-	-	36.1
39.4	491.6	465.2	447.5	425.5	405.7	385.8	368.2	350.5	337.3	321.9	308.6	293.2	-	-	39.4
42.7	446.4	426.6	412.3	392.4	374.8	357.1	340.6	325.2	313.1	298.7	286.6	273.4	260.1	246.9	42.7
45.9	401.2	388.0	377.0	359.4	343.9	328.5	313.1	299.8	288.8	275.6	264.6	253.5	240.3	229.3	45.9
52.5	326.3	324.1	324.1	310.9	295.4	284.4	271.2	260.1	251.3	240.3	231.5	220.5	210.5	200.6	52.5
59.1	273.4	271.2	271.2	269.0	260.1	249.1	238.1	229.3	220.5	211.6	203.9	194.0	185.2	176.4	59.1
65.6	233.7	231.5	233.7	229.3	227.1	220.5	212.7	202.8	197.3	188.5	180.8	172.0	164.2	155.4	65.6
72.2	203.9	200.6	202.8	199.5	197.3	195.1	189.6	180.8	176.4	167.6	162.0	154.3	146.6	138.9	72.2
78.7	179.7	176.4	178.6	175.3	173.1	169.8	168.7	163.1	158.7	151.0	145.5	137.8	131.2	123.5	78.7
85.3	159.8	156.5	158.7	155.4	153.2	149.9	148.8	146.6	143.3	136.7	131.2	123.5	117.9	110.2	85.3
91.9	144.4	141.1	142.2	138.9	136.7	133.4	132.3	130.1	130.1	123.5	117.9	111.3	106.0	99.4	91.9
98.4	130.1	126.8	129.0	125.7	123.5	119.0	117.9	115.7	115.7	112.4	107.8	101.6	95.7	89.3	98.4
108.3	113.5	111.1	112.6	109.1	106.9	103.2	101.6	99.2	99.2	95.9	93.9	88.1	82.2	76.6	108.3
111.5	-	105.8	107.1	103.6	101.4	97.9	96.1	93.7	93.7	90.4	89.3	83.6	78.0	72.3	111.5
124.7	-	89.5	90.6	87.1	84.7	80.9	79.4	76.1	76.1	72.1	71.0	67.2	63.9	58.2	124.7
137.8	-	-	78.0	74.3	71.4	67.2	65.3	61.9	61.9	58.0	56.7	52.9	50.7	46.7	137.8
141.1	-	-	75.4	71.7	68.7	64.5	62.4	59.1	59.1	55.1	53.8	49.8	47.6	43.8	141.1
150.9	-	-	-	63.9	60.6	56.2	54.0	50.5	50.5	46.3	45.2	41.2	39.0	35.1	150.9
160.8	-	-	-	57.5	54.0	49.4	47.1	43.5	43.4	39.3	38.1	34.1	31.9	27.8	160.8
164.0	-	-	-	-	51.8	47.2	44.8	41.2	41.0	37.0	35.7	31.7	29.5	25.4	164.0
177.2	-	-	-	-	44.5	39.7	37.3	33.5	33.3	29.1	27.8	23.8	21.4	17.4	177.2
190.3	-	-	-	-	-	33.5	30.9	27.1	26.7	22.5	21.2	17.2	14.8	10.6	190.3
193.6	-	-	-	-	-	32.2	29.5	25.7	25.3	21.1	19.7	15.7	13.3	9.0	193.6
203.4	-	-	-	-	-	-	25.6	21.6	21.2	17.0	15.4	11.2	8.8	-	203.4
206.7	-	-	-	-	-	-	24.5	20.4	20.0	15.8	14.2	10.1	-	-	206.7
210.0	-	-	-	-	-	-	23.4	19.3	18.7	14.6	13.0	-	-	-	210.0
216.5	-	-	-	-	-	-	-	17.0	16.3	12.1	10.6	-	-	-	216.5
219.8	-	-	-	-	-	-	-	16.0	15.3	11.0	9.5	-	-	-	219.8
226.4	-	-	-	-	-	-	-	14.1	13.3	8.8	-	-	-	-	226.4
229.7	-	-	-	-	-	-	-	-	12.3	-	-	-	-	-	229.7
242.8	-	-	-	-	-	-	-	-	8.8	-	-	-	-	-	242.8


275,600 lb
363,800 lb



SSL, LSL

SUPERLIFT 3800

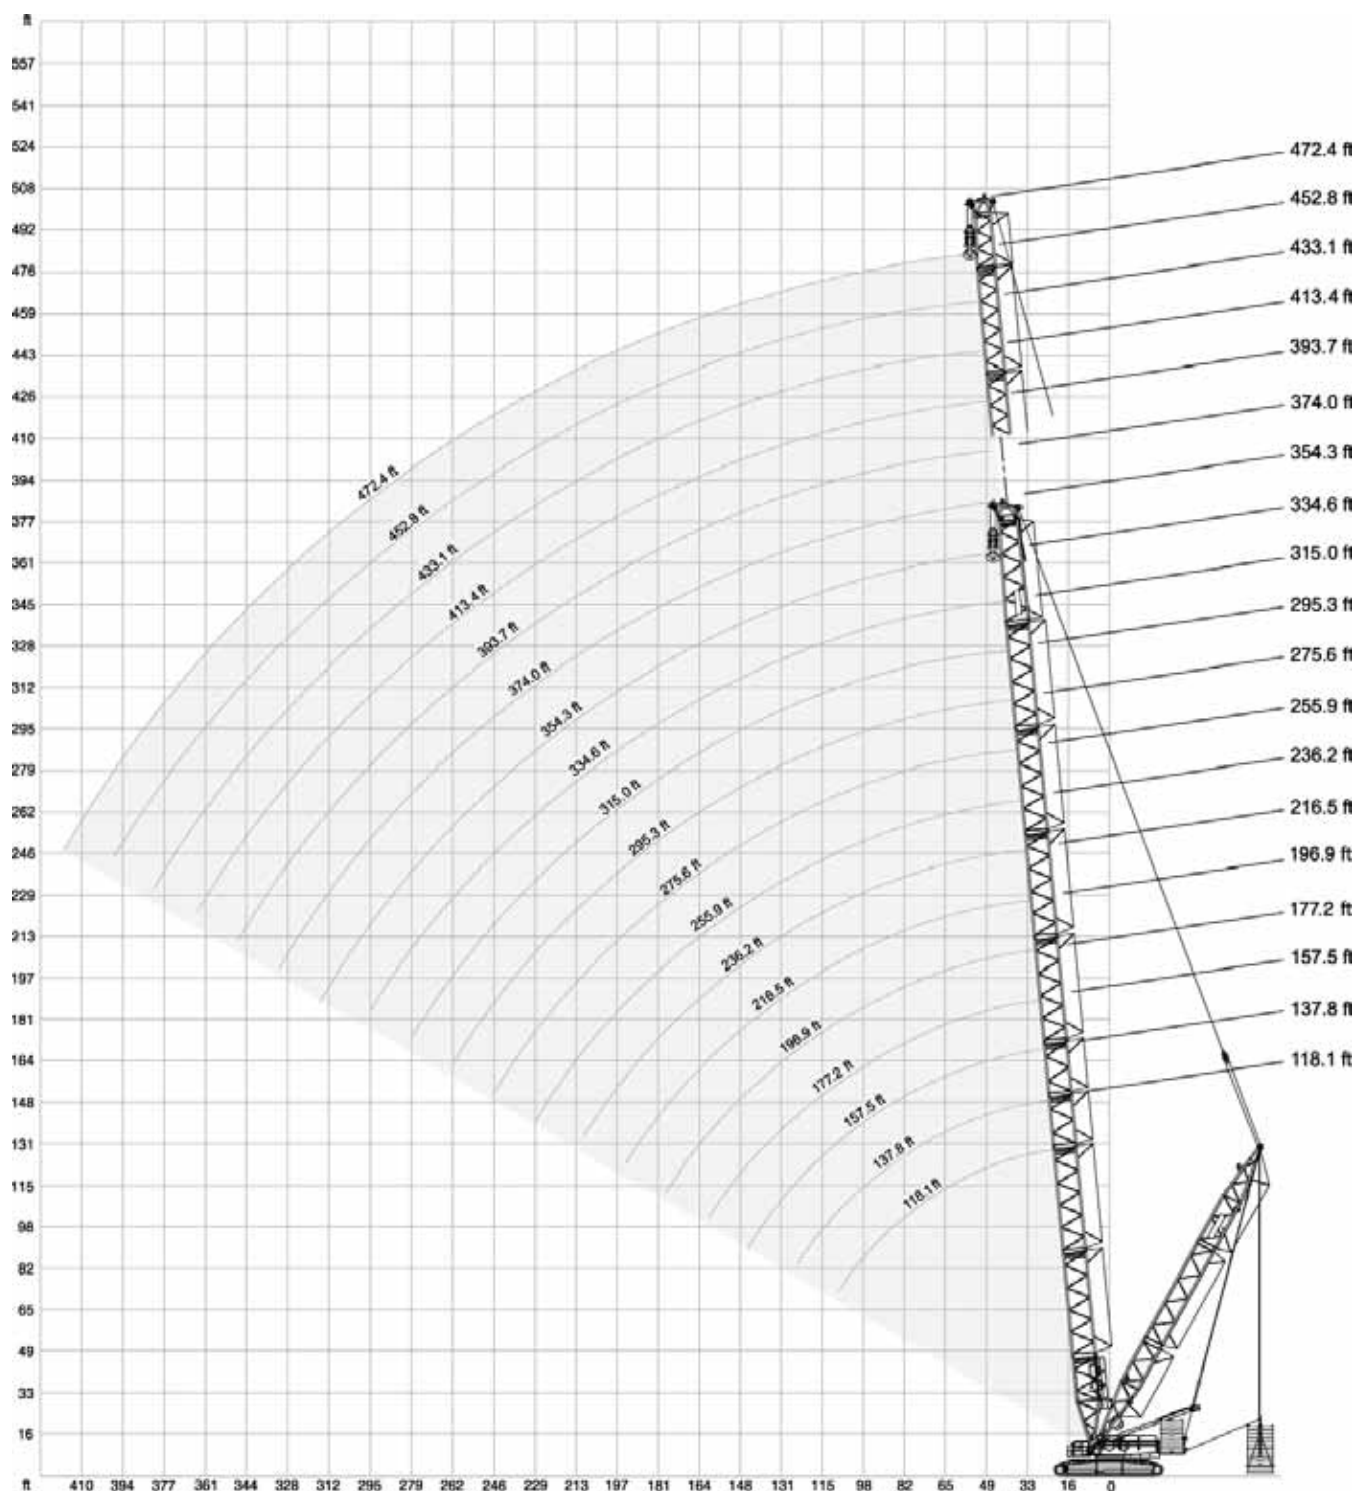

SSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.0-62.3 ft 27.6 ft 32.2 ft/s 360° 75%													
118.1 ft 137.8 ft 157.5 ft 177.2 ft 196.9 ft 216.5 ft 236.2 ft													
SSL_1													
0 lb 0 lb- 716.6 klb 0 lb 0 lb- 716.6 klb 0 lb 0 lb- 716.6 klb 0 lb 0 lb- 716.6 klb 0 lb 0 lb- 716.6 klb 0 lb 0 lb- 716.6 klb													
1,000 lb													
ft													ft
23.0	1175.1	1433.0	-	-	-	-	-	-	-	-	-	-	23.0
26.2	994.3	1433.0	923.7	1433.0	-	1433.0	-	-	-	-	-	-	26.2
29.5	859.8	1433.0	804.7	1433.0	756.2	1433.0	712.1	1433.0	-	1327.2	-	-	29.5
32.8	756.2	1433.0	712.1	1433.0	672.4	1433.0	637.1	1428.6	601.9	1311.8	573.2	1124.4	32.8
36.1	682.3	1433.0	644.9	1433.0	610.7	1429.7	579.8	1423.1	550.1	1287.5	524.7	1124.4	36.1
39.4	608.5	1433.0	577.6	1433.0	549.0	1426.4	522.5	1422.0	498.2	1287.5	476.2	1113.3	39.4
45.9	500.4	1265.5	482.8	1258.8	460.8	1252.2	440.9	1247.8	421.1	1241.2	403.4	1095.7	45.9
52.5	407.9	1126.6	403.4	1122.2	394.6	1115.5	379.2	1108.9	363.8	1104.5	350.5	1086.9	52.5
59.1	341.7	1014.1	337.3	1009.7	335.1	1003.1	330.7	998.7	317.5	992.1	306.4	992.1	59.1
65.6	291.0	923.7	288.8	917.1	284.4	910.5	282.2	906.1	277.8	899.5	271.2	899.5	65.6
72.2	253.5	844.4	251.3	840.0	246.9	833.3	242.5	828.9	240.3	822.3	240.3	822.3	72.2
78.7	224.9	758.4	220.5	773.8	217.2	767.2	213.8	762.8	209.4	756.2	209.4	756.2	78.7
85.3	200.6	674.6	196.2	712.1	192.9	707.7	188.5	701.1	185.2	696.7	185.2	694.5	85.3
91.9	180.8	612.9	176.4	659.2	172.0	654.8	168.7	648.2	164.2	643.8	164.2	641.5	91.9
98.4	163.1	544.5	159.8	606.3	155.4	608.5	151.0	601.9	147.7	597.5	146.6	595.2	98.4
108.3	143.3	465.2	141.1	523.6	136.1	553.4	132.3	547.8	128.5	543.4	127.6	541.2	108.3
111.5	-	-	134.8	496.0	129.7	535.0	126.0	529.8	122.1	525.4	121.3	523.2	111.5
124.7	-	-	112.4	410.1	108.8	457.1	105.1	466.6	100.6	462.2	99.7	460.0	124.7
137.8	-	-	-	-	92.8	385.8	88.2	412.3	83.1	407.9	81.8	405.7	137.8
144.4	-	-	-	-	86.4	350.5	82.1	382.1	76.8	386.5	75.3	385.1	144.4
150.9	-	-	-	-	-	-	76.0	352.0	70.5	365.2	68.9	364.5	150.9
160.8	-	-	-	-	-	-	67.5	315.3	61.9	332.9	60.0	335.8	160.8
164.0	-	-	-	-	-	-	-	-	59.7	321.9	57.6	327.8	164.0
177.2	-	-	-	-	-	-	-	-	50.7	277.8	48.1	295.4	177.2
190.3	-	-	-	-	-	-	-	-	-	-	41.0	261.9	190.3
193.6	-	-	-	-	-	-	-	-	-	-	39.2	253.5	193.6
203.4	-	-	-	-	-	-	-	-	-	-	-	-	203.4
210.0	-	-	-	-	-	-	-	-	-	-	-	-	210.0



0 lb275,600 lb363,800 lb452,000 lb540,200 lb628,400 lb716,600 lb

SSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.0-62.3 ft 27.6 ft 32.2 ft/s 360° 75%													
255.9 ft		275.6 ft		295.3 ft		315.0 ft		334.6 ft		354.3 ft			
SSL_1													
ft	0 lb	0 lb-716.6 klb	0 lb	0 lb-716.6 klb	0 lb	0 lb-716.6 klb	0 lb	0 lb-716.6 klb	0 lb	0 lb-716.6 klb	0 lb	0 lb-716.6 klb	ft
ft	1,000 lb												ft
36.1	-	828.9	-	-	-	-	-	-	-	-	-	-	36.1
39.4	434.3	828.9	414.5	745.2	-	670.2	-	-	-	-	-	-	39.4
42.7	403.4	828.9	384.7	745.2	370.4	670.2	352.7	595.2	-	-	-	-	42.7
45.9	372.6	828.9	354.9	745.2	343.9	670.2	328.5	595.2	315.3	524.7	302.0	463.0	45.9
52.5	324.1	820.1	308.6	745.2	299.8	670.2	286.6	595.2	275.6	524.7	262.4	460.8	52.5
59.1	284.4	813.5	273.4	738.5	264.6	670.2	253.5	595.2	242.5	524.7	231.5	460.8	59.1
65.6	251.3	806.9	242.5	729.7	235.9	661.4	224.9	595.2	216.1	524.7	206.1	458.6	65.6
72.2	224.9	800.3	216.1	723.1	210.5	652.6	201.7	593.0	192.9	524.7	184.1	456.4	72.2
78.7	203.9	751.8	195.1	718.7	189.6	648.2	180.8	584.2	173.1	520.3	165.3	454.2	78.7
85.3	183.0	692.3	176.4	687.8	172.0	643.8	164.2	577.6	156.5	511.5	148.8	447.5	85.3
91.9	162.0	637.1	158.7	632.7	156.5	632.7	148.8	571.0	141.1	504.9	133.4	440.9	91.9
98.4	144.4	590.8	142.2	586.4	142.2	586.4	134.5	560.0	127.9	502.7	121.3	436.5	98.4
111.5	118.8	518.8	115.7	514.4	115.9	514.4	111.3	502.7	107.3	476.9	101.0	421.1	111.5
124.7	96.7	456.4	93.1	451.9	93.3	451.9	90.2	448.3	87.5	444.6	82.5	404.9	124.7
137.8	78.0	403.4	74.3	399.0	74.5	399.0	71.2	396.8	68.6	394.6	65.7	390.2	137.8
150.9	64.7	360.8	60.9	356.4	61.0	356.4	57.5	354.2	54.9	352.0	51.9	349.1	150.9
164.0	53.1	323.3	49.2	319.7	49.2	319.7	45.6	316.7	42.9	314.5	39.8	312.3	164.0
177.2	43.2	291.0	39.0	288.8	39.0	288.8	35.3	284.4	32.6	282.2	29.3	280.0	177.2
190.3	35.6	266.0	31.4	263.8	31.1	262.4	27.3	259.4	24.5	257.2	21.2	255.0	190.3
203.4	28.8	244.0	24.5	241.0	24.0	239.6	20.3	237.0	17.2	234.6	13.8	230.8	203.4
206.7	27.3	239.2	23.0	235.9	22.5	234.8	18.7	232.0	15.6	229.5	12.1	224.9	206.7
213.3	24.4	229.6	20.0	225.6	19.4	225.2	15.7	222.1	12.3	219.4	-	216.1	213.3
216.5	22.9	224.9	18.5	220.5	17.9	220.5	14.1	217.2	-	215.0	-	211.6	216.5
223.1	20.7	215.0	16.2	212.7	15.4	212.1	11.2	208.3	-	206.5	-	203.6	223.1
229.7	18.5	205.0	13.8	205.0	12.9	203.7	-	200.6	-	198.0	-	195.5	229.7
232.9	-	-	12.6	201.2	11.7	199.5	-	196.8	-	193.8	-	191.4	232.9
236.2	-	-	11.5	197.3	-	196.2	-	192.9	-	189.6	-	187.4	236.2
242.8	-	-	-	189.2	-	189.6	-	185.9	-	183.0	-	180.4	242.8
246.1	-	-	-	185.2	-	186.3	-	182.4	-	179.7	-	176.9	246.1
255.9	-	-	-	-	-	176.4	-	172.0	-	169.8	-	166.4	255.9
262.5	-	-	-	-	-	169.8	-	166.4	-	163.9	-	160.6	262.5
269.0	-	-	-	-	-	-	-	160.9	-	158.0	-	154.7	269.0
278.9	-	-	-	-	-	-	-	152.1	-	149.7	-	146.2	278.9
282.2	-	-	-	-	-	-	-	-	-	147.3	-	143.7	282.2
295.3	-	-	-	-	-	-	-	-	-	137.8	-	133.4	295.3
308.4	-	-	-	-	-	-	-	-	-	-	-	124.6	308.4
315.0	-	-	-	-	-	-	-	-	-	-	-	120.2	315.0



0 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb



LSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.0-62.3 ft 27.6 ft 32.2 ft/s 360° 75%																	
177.2 ft		196.9 ft		216.5 ft		236.2 ft		255.9 ft		275.6 ft							
LSL_2 LSL_1 LSL_2 LSL_1 LSL_2 LSL_1 LSL_2																	
0 lb		0lb-716.6klb		0 lb		0lb-716.6klb		0 t		0 lb-716.6 klb		0 t		0 lb-716.6 klb		0 t	
1,000 lb																	
ft																	ft
26.2	765.0	765.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	26.2
29.5	705.5	765.0	665.8	765.0	630.5	765.0	-	-	-	-	-	-	-	-	-	-	29.5
32.8	632.7	765.0	599.7	765.0	568.8	765.0	531.3	765.0	765.0	504.9	716.5	729.7	-	-	-	-	32.8
36.1	576.5	765.0	547.8	765.0	521.4	765.0	488.3	765.0	765.0	465.2	716.5	729.7	445.3	597.5	661.4	-	36.1
39.4	520.3	765.0	496.0	765.0	474.0	765.0	445.3	765.0	765.0	425.5	716.5	729.7	410.1	597.5	661.4	-	39.4
45.9	440.9	765.0	421.1	765.0	403.4	765.0	381.4	765.0	765.0	366.0	716.5	729.7	354.9	597.5	661.4	-	45.9
52.5	381.4	765.0	366.0	765.0	350.5	765.0	332.9	765.0	765.0	319.7	712.1	723.1	310.9	595.2	659.2	-	52.5
59.1	332.9	765.0	321.9	765.0	308.6	765.0	293.2	765.0	765.0	282.2	709.9	723.1	273.4	582.0	643.8	-	59.1
65.6	288.8	765.0	284.4	765.0	273.4	765.0	262.4	765.0	765.0	251.3	709.9	723.1	244.7	575.4	639.3	-	65.6
72.2	251.3	765.0	249.1	765.0	244.7	765.0	235.9	743.0	756.2	224.9	707.7	716.5	220.5	571.0	637.1	-	72.2
78.7	220.5	765.0	219.4	765.0	215.0	762.8	212.7	718.7	731.9	205.0	679.0	690.0	200.6	557.8	623.9	-	78.7
85.3	197.3	712.1	194.0	707.7	190.7	703.3	188.5	696.7	703.3	185.2	652.6	661.4	183.0	537.9	599.7	-	85.3
91.9	177.5	659.2	174.2	654.8	170.9	650.4	168.7	648.2	650.4	165.3	626.1	634.9	166.4	518.1	575.4	-	91.9
98.4	159.8	612.9	157.6	608.5	153.2	604.1	152.1	604.1	604.1	147.7	597.5	599.7	149.9	498.2	553.4	-	98.4
111.5	134.8	540.9	131.9	536.5	127.5	532.0	127.1	532.0	532.0	122.7	525.4	527.6	124.9	457.1	506.3	-	111.5
124.7	114.0	476.9	110.6	472.5	106.3	468.1	106.2	468.1	468.9	101.9	462.2	464.4	103.9	418.9	458.6	-	124.7
137.8	97.2	421.1	93.7	416.7	89.5	412.3	89.3	412.3	414.5	85.3	407.9	410.1	86.9	383.6	410.1	-	137.8
150.9	85.2	365.2	81.5	375.5	76.9	371.1	76.9	371.1	371.8	72.5	366.7	368.9	74.1	351.3	367.4	-	150.9
160.8	76.7	324.1	73.1	344.7	68.2	342.5	68.4	342.5	342.8	63.7	338.0	340.2	65.3	328.1	338.0	-	160.8
164.0	-	-	70.8	334.4	65.8	334.4	66.0	334.4	335.1	61.3	330.0	332.2	62.8	321.1	330.0	-	164.0
177.2	-	-	61.5	293.2	56.2	302.0	56.4	302.0	304.2	51.6	297.6	299.8	53.1	293.2	297.6	-	177.2
190.3	-	-	-	-	48.8	272.1	49.2	277.0	279.3	44.4	274.1	274.8	45.5	266.8	272.6	-	190.3
193.6	-	-	-	-	47.0	264.6	47.4	270.8	273.0	42.6	268.2	268.6	43.6	260.1	266.4	-	193.6
203.4	-	-	-	-	-	-	42.8	254.6	256.8	37.9	252.1	252.8	38.7	241.4	248.4	-	203.4
210.0	-	-	-	-	-	-	39.9	244.7	246.9	35.1	241.8	243.2	35.8	229.3	236.6	-	210.0
216.5	-	-	-	-	-	-	-	-	-	32.2	231.5	233.7	32.8	217.2	224.9	-	216.5
226.4	-	-	-	-	-	-	-	-	-	28.9	219.4	218.3	29.4	202.8	207.8	-	226.4
229.7	-	-	-	-	-	-	-	-	-	-	-	-	28.3	198.8	202.1	-	229.7
242.8	-	-	-	-	-	-	-	-	-	-	-	-	24.1	181.1	184.1	-	242.8
246.1	-	-	-	-	-	-	-	-	-	-	-	-	23.1	176.4	180.8	-	246.1

	0 lb	143,300 lb	275,600 lb	363,800 lb	452,000 lb	540,200 lb	628,400 lb	716,600 lb
---	------	------------	------------	------------	------------	------------	------------	------------



LSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.0-62.3 ft 27.6 ft 32.2 ft/s 360° 75%																	
		295.3 ft		315.0 ft		334.6 ft		354.3 ft		374.0 ft							
		LSL_1		LSL_2		LSL_1		LSL_2		LSL_1		LSL_2		LSL_1		LSL_2	
		0 t		0 lb-716.6 klb		0 t		0 lb-716.6 klb		0 t		0 lb-716.6 klb		0 t		0 lb-716.6 klb	
ft		1,000 lb														ft	
36.1	425.5	551.2	608.5	-	-	-	-	-	-	-	-	-	-	-	-	36.1	425.5
39.4	392.4	551.2	608.5	377.0	476.2	533.5	361.6	432.1	480.6	-	-	-	-	-	-	39.4	392.4
42.7	366.0	549.0	607.4	351.6	474.0	531.3	337.3	432.1	478.4	319.7	390.2	429.9	306.4	357.1	388.0	42.7	366.0
45.9	339.5	546.7	606.3	326.3	471.8	529.1	313.1	432.1	476.2	299.8	390.2	429.9	286.6	357.1	385.8	45.9	339.5
52.5	297.6	546.7	604.1	286.6	467.4	529.1	275.6	432.1	476.2	262.4	390.2	429.9	251.3	357.1	385.8	52.5	297.6
59.1	262.4	533.5	588.6	253.5	458.6	529.1	244.7	432.1	476.2	233.7	390.2	429.9	222.7	354.9	385.8	59.1	262.4
65.6	235.9	520.3	575.4	227.1	449.7	529.1	218.3	429.9	476.2	208.3	388.0	429.9	199.5	354.9	385.8	65.6	235.9
72.2	212.7	511.5	566.6	205.0	440.9	529.1	196.2	427.7	476.2	187.4	388.0	429.9	178.6	352.7	385.8	72.2	212.7
78.7	192.9	500.4	555.6	186.3	432.1	529.1	178.6	427.7	474.0	168.7	385.8	429.9	160.9	352.7	385.8	78.7	192.9
85.3	175.3	485.0	537.9	169.8	423.3	529.1	162.0	425.5	474.0	153.2	385.8	427.7	145.5	350.5	385.8	85.3	175.3
91.9	159.8	465.2	518.1	154.3	407.9	515.9	147.7	423.3	474.0	140.0	383.6	427.7	132.3	350.5	383.6	91.9	159.8
98.4	146.6	447.5	498.2	142.2	394.6	509.3	135.6	418.9	471.8	127.9	383.6	427.7	120.2	350.5	383.6	98.4	146.6
111.5	122.2	412.3	457.1	119.4	365.2	474.7	115.6	396.1	459.3	108.3	374.8	421.8	101.6	343.2	380.7	111.5	122.2
124.7	101.4	377.0	416.7	99.3	335.8	448.3	96.8	375.5	438.0	90.9	357.9	406.4	85.3	330.7	374.1	124.7	101.4
137.8	84.2	341.7	377.0	81.8	306.4	405.7	79.1	363.8	401.2	75.6	348.3	399.0	71.2	321.9	368.2	137.8	84.2
150.9	71.1	313.8	344.7	68.6	281.5	363.0	65.9	345.4	358.6	62.2	332.9	356.4	58.1	310.1	343.9	150.9	71.1
164.0	59.7	287.3	313.8	57.0	257.9	325.5	54.3	323.3	321.9	50.6	315.3	318.9	46.5	296.2	316.7	164.0	59.7
177.2	49.8	262.4	284.4	47.2	235.9	293.2	44.3	291.0	291.0	40.6	288.8	286.6	36.4	284.4	284.4	177.2	49.8
190.3	42.2	240.3	256.5	39.5	217.5	268.2	36.5	267.5	264.6	32.8	263.8	261.6	28.6	259.4	259.4	190.3	42.2
203.4	35.3	219.4	230.8	32.7	199.2	246.2	29.6	245.4	241.8	25.8	241.0	239.2	21.6	237.4	237.0	203.4	35.3
216.5	29.3	199.5	209.4	26.7	181.9	227.1	23.6	224.9	222.7	19.6	220.5	219.4	15.4	218.3	217.2	216.5	29.3
229.7	24.5	181.9	189.6	21.8	166.4	210.2	18.6	208.7	206.5	14.5	205.0	202.6	10.1	201.5	199.9	229.7	24.5
232.9	23.3	177.5	184.6	20.6	162.6	205.9	17.3	204.7	202.5	13.2	201.2	198.4	8.8	197.3	195.8	232.9	23.3
242.8	20.1	166.4	170.5	17.4	151.8	195.1	14.0	193.6	191.1	9.7	189.6	187.4	-	187.0	184.8	242.8	20.1
255.9	16.3	153.2	152.1	13.4	137.8	181.9	9.9	179.7	177.5	-	176.4	174.2	-	173.1	170.9	255.9	16.3
259.2	15.5	149.4	149.9	12.7	135.6	178.9	9.0	177.5	174.5	-	173.4	171.2	-	170.1	167.9	259.2	15.5
262.5	14.8	145.5	147.7	11.9	133.4	176.0	-	174.6	171.6	-	170.5	168.3	-	167.2	165.0	262.5	14.8
269.0	-	-	-	10.3	127.3	170.1	-	168.9	165.7	-	164.6	162.4	-	161.3	159.1	269.0	-
272.3	-	-	-	9.5	124.3	167.2	-	166.0	162.8	-	161.7	159.5	-	158.4	156.2	272.3	-
278.9	-	-	-	-	119.0	162.0	-	160.8	157.4	-	156.3	154.0	-	153.0	150.8	278.9	-
282.2	-	-	-	-	-	-	-	158.4	155.1	-	154.0	151.4	-	150.6	148.4	282.2	-
295.3	-	-	-	-	-	-	-	148.8	145.5	-	144.4	141.1	-	141.1	138.9	295.3	-
308.4	-	-	-	-	-	-	-	-	-	-	135.6	133.2	-	132.3	130.1	308.4	-
311.7	-	-	-	-	-	-	-	-	-	-	133.4	131.2	-	130.1	127.9	311.7	-
321.5	-	-	-	-	-	-	-	-	-	-	-	-	-	123.9	121.7	321.5	-
331.4	-	-	-	-	-	-	-	-	-	-	-	-	-	117.9	115.7	331.4	-

	0 lb	143,300 lb	275,600 lb	363,800 lb	452,000 lb	540,200 lb	628,400 lb	716,600 lb
---	------	------------	------------	------------	------------	------------	------------	------------



LSL

SUPERLIFT 3800


363,800 lb + 110,200 lb 36.0-62.3 ft 27.6 ft 32.2 ft/s 360° 75%																	
393.7 ft		413.4 ft		433.1 ft		452.8 ft		472.4 ft									
LSL_1		LSL_2		LSL_1		LSL_2		LSL_1		LSL_2		LSL_1		LSL_2			
0 t		0 lb-716.6 klb		0 t		0 lb-716.6 klb		0 t		0 lb-716.6 klb		0 t		0 lb-716.6 klb			
1,000 lb																	
ft																	ft
45.9	275.6	304.2	337.3	255.7	262.4	293.2	-	-	-	-	-	-	-	-	-	-	45.9
49.2	259.0	303.1	336.2	244.7	261.2	292.1	217.2	222.7	253.5	186.3	192.9	217.2	-	-	-	-	49.2
52.5	242.5	302.0	335.1	233.7	260.1	291.0	216.1	222.7	253.5	186.3	191.8	217.2	160.9	166.4	189.6	-	52.5
59.1	215.0	302.0	335.1	208.3	260.1	291.0	200.6	220.5	253.5	185.2	190.7	216.1	159.8	165.3	188.5	-	59.1
65.6	191.8	302.0	335.1	186.3	260.1	291.0	179.7	220.5	251.3	174.2	189.6	215.0	158.7	163.1	187.4	-	65.6
72.2	172.0	299.8	332.9	167.6	257.9	291.0	160.9	219.4	251.3	156.5	187.4	213.8	149.9	162.0	186.3	-	72.2
78.7	155.4	297.6	332.9	151.0	255.7	288.8	145.5	217.2	249.1	141.1	186.3	212.7	134.5	159.8	185.2	-	78.7
85.3	140.0	297.6	332.9	136.7	253.5	286.6	131.2	216.1	249.1	126.8	184.1	211.6	121.3	157.6	183.0	-	85.3
91.9	127.9	295.4	332.9	123.5	251.3	286.6	119.0	213.8	246.9	114.6	181.9	209.4	110.2	156.5	181.9	-	91.9
98.4	115.7	295.4	330.7	112.4	251.3	286.6	108.2	211.6	246.9	104.7	180.8	208.3	99.9	154.3	179.7	-	98.4
111.5	97.4	291.0	327.8	94.4	247.7	283.7	90.5	209.4	245.4	87.2	177.8	206.1	82.8	150.6	177.1	-	111.5
124.7	81.2	285.9	324.8	78.5	244.0	280.0	74.9	205.8	242.5	71.9	175.3	203.2	67.8	147.3	174.9	-	124.7
137.8	67.2	280.0	321.9	64.8	238.1	275.6	61.5	200.6	238.1	58.9	170.9	199.5	54.9	144.4	172.0	-	137.8
150.9	56.2	272.6	310.9	54.2	233.7	271.2	51.1	195.8	233.7	48.6	167.2	195.8	44.9	140.7	168.3	-	150.9
164.0	45.6	261.6	299.8	44.0	226.7	262.4	41.7	191.8	229.3	39.3	163.1	192.2	35.9	136.7	164.6	-	164.0
177.2	35.5	255.7	282.2	34.2	220.5	257.9	33.3	187.4	224.9	31.1	158.7	189.6	27.8	132.3	160.9	-	177.2
190.3	27.7	247.7	257.2	26.4	213.1	247.7	25.8	181.1	218.3	24.3	155.8	185.9	21.0	128.6	157.3	-	190.3
203.4	20.6	235.5	234.8	19.3	206.5	234.8	18.9	173.4	211.0	18.0	151.7	181.3	14.8	124.6	153.2	-	203.4
216.5	14.3	217.2	215.0	13.0	200.6	215.0	12.6	169.8	207.2	12.1	147.7	177.5	9.3	121.3	149.9	-	216.5
223.1	11.7	208.9	206.4	10.2	198.4	206.4	9.7	166.7	200.6	9.3	145.5	173.4	-	119.4	146.2	-	223.1
226.4	10.4	204.8	202.2	8.8	197.3	202.2	-	164.7	197.3	-	144.4	172.5	-	118.5	145.5	-	226.4
229.7	9.0	200.6	198.0	-	195.5	198.0	-	163.1	194.0	-	143.3	171.6	-	117.6	144.8	-	229.7
242.8	-	185.9	182.6	-	184.8	182.6	-	158.7	180.4	-	138.2	166.1	-	113.1	140.7	-	242.8
255.9	-	172.0	168.7	-	170.9	168.7	-	154.3	166.4	-	134.5	163.1	-	110.0	136.7	-	255.9
269.0	-	160.2	156.9	-	159.1	156.9	-	148.8	154.7	-	129.7	153.6	-	106.6	133.7	-	269.0
282.2	-	149.2	146.2	-	148.1	145.9	-	141.5	143.7	-	124.9	144.0	-	103.4	128.6	-	282.2
295.3	-	138.9	136.7	-	137.8	135.6	-	131.2	133.4	-	119.0	134.5	-	99.0	125.7	-	295.3
308.4	-	130.8	127.9	-	129.0	126.8	-	120.9	124.6	-	110.8	124.8	-	92.1	115.7	-	308.4
321.5	-	122.7	119.0	-	121.0	119.0	-	110.9	117.3	-	102.1	116.4	-	84.8	104.8	-	321.5
334.6	-	114.6	112.4	-	113.5	111.3	-	101.6	109.3	-	93.3	106.7	-	77.2	94.8	-	334.6
347.8	-	108.9	105.6	-	104.7	104.7	-	91.3	102.3	-	84.4	93.6	-	69.5	83.9	-	347.8
360.9	-	-	-	-	94.1	95.4	-	81.1	92.4	-	75.8	80.9	-	62.0	72.8	-	360.9
364.2	-	-	-	-	91.1	92.4	-	78.5	89.3	-	74.1	77.8	-	60.3	70.0	-	364.2
374.0	-	-	-	-	-	-	-	71.2	79.8	-	68.8	68.6	-	55.1	62.8	-	374.0
380.6	-	-	-	-	-	-	-	65.9	72.5	-	64.6	61.8	-	51.3	57.1	-	380.6
387.1	-	-	-	-	-	-	-	-	-	-	60.2	55.3	-	47.5	51.4	-	387.1
397.0	-	-	-	-	-	-	-	-	-	-	53.6	46.3	-	41.7	43.4	-	397.0
400.3	-	-	-	-	-	-	-	-	-	-	-	-	-	39.8	40.5	-	400.3
413.4	-	-	-	-	-	-	-	-	-	-	-	-	-	32.4	29.5	-	413.4
416.7	-	-	-	-	-	-	-	-	-	-	-	-	-	30.4	26.7	-	416.7

	0 lb	143,300 lb	275,600 lb	363,800 lb	452,000 lb	540,200 lb	628,400 lb	716,600 lb
---	------	------------	------------	------------	------------	------------	------------	------------




SH+LF, LH+LF


SUPERLIFT 3800



LH+LF_1



LH+LF_3

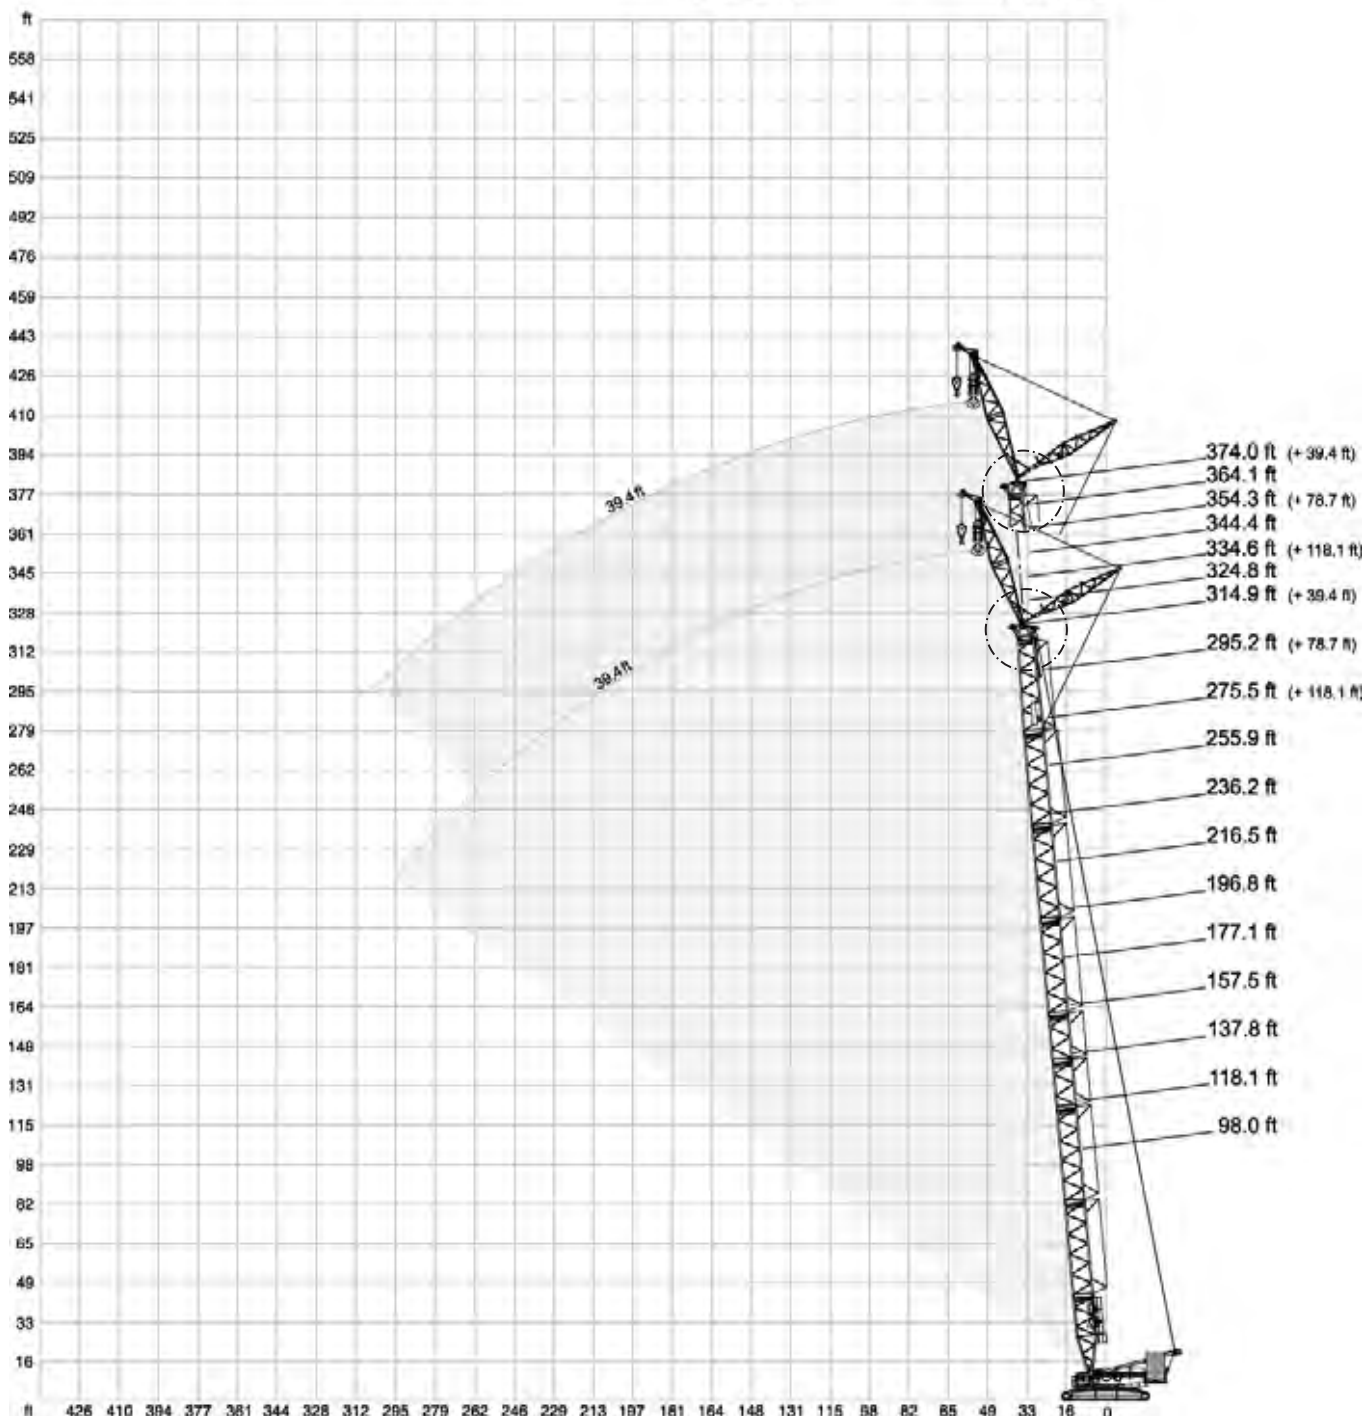

* Attachable

** Option

SUPERLIFT 3800

31

SUPERLIFT 3800



TEREX®

SH+LF

SUPERLIFT 3800

[illegible]

SH+LF

SUPERLIFT 3800

39.4-118.1 ft										27.6 ft			32.2 ft/s			360°			ISO		
275.6 ft										295.3 ft						315.0 ft					
SH+LF_1																					
39.4 ft			78.7 ft			118.1 ft			39.4 ft			78.7 ft			39.4 ft						
15° 20° 30°			15° 20° 30°			15° 20° 30°			15° 20° 30°			15° 20° 30°			15° 20° 30°						
1,000 lb																			ft		
45.9	348.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	45.9			
49.2	327.4	269.0	-	-	-	-	-	-	-	313.1	-	-	-	-	-	-	299.8	-	49.2		
52.5	306.4	262.4	-	-	-	-	-	-	-	293.2	266.8	-	-	-	-	-	282.2	269.0	52.5		
55.8	288.8	256.8	165.3	-	-	-	-	-	-	276.7	261.2	-	-	-	-	-	265.7	261.2	55.8		
59.1	271.2	251.3	162.0	177.5	-	-	-	-	-	260.1	255.7	163.1	-	-	-	-	249.1	253.5	59.1		
62.3	255.7	245.8	159.8	173.1	-	-	-	-	-	245.8	245.8	160.9	174.2	-	-	-	235.9	239.2	62.3		
65.6	240.3	240.3	157.6	168.7	129.0	-	-	-	-	231.5	235.9	158.7	169.8	-	-	-	222.7	224.9	65.6		
68.9	228.7	229.8	154.9	164.2	126.2	-	-	-	-	219.9	223.8	156.5	165.9	127.9	-	-	211.1	213.8	68.9		
72.2	217.2	219.4	152.1	159.8	123.5	-	-	106.7	-	208.3	211.6	154.3	162.0	124.6	-	-	199.5	202.8	72.2		
78.7	196.2	198.4	147.7	152.1	117.9	76.7	101.6	-	-	188.5	190.7	149.9	154.3	120.2	-	-	179.7	183.0	78.7		
82.0	186.8	189.0	146.1	148.8	115.7	75.5	99.4	-	-	179.7	181.9	147.7	151.0	117.9	75.8	-	171.4	174.2	82.0		
85.3	177.5	179.7	144.4	145.5	113.5	74.3	97.2	77.2	-	170.9	173.1	145.5	147.7	115.7	74.7	-	163.1	165.3	85.3		
91.9	162.0	164.2	140.0	138.9	109.8	72.3	93.0	74.1	-	155.4	157.6	142.2	142.2	111.3	72.8	-	147.7	149.9	91.9		
98.4	147.7	149.9	136.7	132.3	105.8	70.1	89.3	71.4	-	141.1	143.3	138.9	135.6	107.6	70.8	-	134.5	136.7	98.4		
101.7	141.9	143.9	134.8	129.8	104.0	69.2	87.6	70.2	45.4	135.6	137.5	135.0	132.3	105.8	69.8	-	129.0	130.6	101.7		
111.5	124.6	125.7	129.0	122.4	98.5	66.4	82.7	66.6	43.4	119.0	120.2	123.5	122.4	100.3	67.0	-	112.4	113.5	111.5		
124.7	103.0	104.3	106.5	110.0	92.2	63.1	76.5	62.4	41.0	100.1	101.4	104.1	104.9	94.1	63.9	-	94.6	96.1	124.7		
137.8	85.1	86.2	88.6	93.9	86.9	60.2	71.0	58.4	39.0	81.6	83.1	85.5	89.7	88.6	61.1	-	77.8	79.1	137.8		
150.9	70.1	71.2	73.2	79.4	81.4	57.5	66.1	54.9	37.0	66.6	67.9	70.1	76.3	78.7	58.4	-	62.6	63.9	150.9		
164.0	57.8	58.6	60.4	66.6	68.6	55.1	61.9	51.8	35.3	54.2	55.3	57.3	63.5	65.7	56.0	-	50.3	51.4	164.0		
177.2	47.4	48.3	49.8	55.8	57.8	53.1	58.4	48.9	33.7	43.9	44.8	46.5	52.7	54.7	53.8	-	39.9	40.8	177.2		
190.3	38.6	39.5	40.8	46.7	48.3	51.1	52.9	46.5	32.4	35.1	35.9	37.5	43.7	45.4	48.5	-	31.1	32.0	190.3		
203.4	31.3	32.0	33.1	39.0	40.3	43.0	44.8	44.8	31.1	27.6	28.4	29.5	35.7	37.3	40.1	-	23.4	24.3	203.4		
216.5	24.7	25.4	26.2	32.2	33.5	35.7	37.7	39.7	30.0	21.2	21.8	22.9	28.9	30.4	32.8	-	17.0	17.6	216.5		
229.7	19.2	19.6	20.5	26.2	27.3	29.3	31.5	33.3	28.9	15.4	16.1	17.0	22.9	24.3	26.5	-	11.2	11.9	229.7		
236.2	16.7	17.1	17.9	23.6	24.5	26.5	28.8	30.5	28.4	12.9	13.6	14.3	20.3	21.5	23.5	-	8.6	9.3	236.2		
239.5	15.4	15.9	-	22.3	23.3	25.1	27.4	29.2	28.2	11.6	12.3	13.0	19.0	20.1	22.1	-	-	7.9	9.0	239.5	
242.8	14.1	14.6	-	20.9	22.0	23.8	26.0	27.8	28.0	10.4	11.0	11.7	17.6	18.7	20.7	-	-	-	7.7	242.8	
249.3	12.0	12.3	-	18.6	19.6	21.3	23.6	25.3	26.7	8.2	8.6	9.5	15.2	16.4	18.2	-	-	-	-	249.3	
255.9	9.9	10.1	-	16.3	17.2	18.7	21.2	22.7	25.4	-	-	-	13.0	13.9	15.7	-	-	-	-	255.9	
262.5	7.9	8.2	-	14.2	15.0	16.4	19.1	20.5	22.9	-	-	-	10.9	11.8	13.4	-	-	-	-	262.5	
269.0	-	-	-	12.1	12.8	14.1	17.0	18.3	20.5	-	-	-	8.8	9.7	11.2	-	-	-	-	269.0	
272.3	-	-	-	11.2	11.8	13.1	16.0	17.3	19.5	-	-	-	7.7	8.6	10.2	-	-	-	-	272.3	
275.6	-	-	-	10.3	10.9	12.1	15.0	16.2	18.4	-	-	-	-	-	9.2	-	-	-	-	275.6	
278.9	-	-	-	9.3	10.0	-	14.0	15.2	17.4	-	-	-	-	-	8.2	-	-	-	-	278.9	
282.2	-	-	-	8.4	9.0	-	13.0	14.1	16.3	-	-	-	-	-	-	-	-	-	-	282.2	
285.4	-	-	-	-	8.2	-	12.1	13.2	15.3	-	-	-	-	-	-	-	-	-	-	285.4	
295.3	-	-	-	-	-	-	9.5	10.6	12.3	-	-	-	-	-	-	-	-	-	-	295.3	
301.8	-	-	-	-	-	-	7.7	8.8	10.5	-	-	-	-	-	-	-	-	-	-	301.8	
305.1	-	-	-	-	-	-	-	7.9	9.5	-	-	-	-	-	-	-	-	-	-	305.1	
308.4	-	-	-	-	-	-	-	-	8.6	-	-	-	-	-	-	-	-	-	-	308.4	
311.7	-	-	-	-	-	-	-	-	7.9	-	-	-	-	-	-	-	-	-	-	311.7	

99,200 lb187,400 lb275,600 lb363,800 lb408,000 lb452,000 lb

0 lb66,100 lb110,200 lb



LH + LF

SUPERLIFT 3800

39.4-118.1 ft										27.6 ft			32.2 ft/s			360°			ISO		
157.5 ft										177.2 ft											
LH+LF_1																					
39.4 ft			78.7 ft			118.1 ft			39.4 ft			78.7 ft			118.1 ft						
15° 20° 30°			15° 20° 30°			15° 20° 30°			15° 20° 30°			15° 20° 30°			15° 20° 30°						
ft										1,000 lb										ft	
32.8	392.4	-	-	-	-	-	-	-	-	385.8	-	-	-	-	-	-	-	32.8			
36.1	374.8	291.0	-	-	-	-	-	-	-	368.2	286.6	-	-	-	-	-	-	36.1			
39.4	357.1	280.0	-	-	-	-	-	-	-	353.8	276.7	183.0	-	-	-	-	-	39.4			
42.7	342.8	270.1	180.8	-	-	-	-	-	-	339.5	266.8	178.6	-	-	-	-	-	42.7			
45.9	328.5	260.1	176.4	190.7	-	-	-	-	-	327.4	259.0	174.7	187.4	-	-	-	-	45.9			
49.2	316.4	252.4	172.0	183.5	-	-	-	-	-	315.3	251.3	170.9	180.8	-	-	-	-	49.2			
52.5	304.2	244.7	167.6	176.4	140.0	-	-	-	-	305.3	244.7	167.0	174.2	137.8	-	-	-	52.5			
55.8	293.2	237.0	163.7	169.8	135.6	-	-	-	-	295.4	238.1	163.1	167.6	133.4	-	-	-	55.8			
59.1	282.2	229.3	159.8	163.1	131.2	-	117.9	-	-	286.6	231.5	159.8	162.6	130.1	-	114.6	-	59.1			
62.3	273.4	223.8	156.5	157.6	127.3	-	114.1	-	-	277.8	224.9	156.5	157.6	126.8	84.9	111.3	-	62.3			
65.6	264.6	218.3	153.2	152.1	123.5	84.4	110.2	-	-	269.0	219.9	153.8	152.7	123.5	83.2	108.1	-	65.6			
68.9	256.8	212.7	150.5	147.2	120.2	82.7	106.7	86.2	-	260.1	215.0	151.0	147.7	120.2	81.6	104.9	84.4	68.9			
72.2	249.1	207.2	147.7	142.2	116.8	80.9	103.2	83.8	-	235.9	205.0	145.5	138.9	113.5	78.5	99.0	80.2	72.2			
78.7	233.7	196.2	142.2	134.5	110.2	77.6	97.2	79.4	-	211.6	195.1	141.1	131.2	108.7	75.6	93.9	76.3	78.7			
85.3	213.8	187.4	136.7	126.8	105.4	74.3	91.9	75.4	-	201.2	191.3	138.3	127.9	106.2	74.3	91.5	74.6	85.3			
88.6	203.4	183.5	134.5	123.5	102.8	72.9	89.5	73.6	49.2	187.4	187.4	135.6	124.6	103.6	73.0	89.1	73.0	88.6			
91.9	192.9	179.7	132.3	120.2	100.3	71.4	87.1	71.9	48.1	173.1	174.2	132.3	119.0	99.2	70.3	84.7	69.7	91.9			
98.4	175.3	172.0	127.9	113.5	95.9	68.8	82.5	68.3	46.1	144.4	145.5	124.6	108.5	91.3	65.7	76.7	63.9	98.4			
111.5	146.6	147.7	120.2	103.6	88.0	64.2	74.3	62.4	42.8	122.4	123.5	117.9	99.6	84.7	61.9	69.9	58.9	111.5			
124.7	125.7	125.7	114.6	95.0	81.4	60.2	67.7	57.3	39.7	106.0	106.7	107.6	92.2	78.9	58.4	64.4	54.5	124.7			
137.8	108.9	109.3	110.0	87.7	75.8	56.9	62.4	52.9	37.3	92.4	92.8	93.5	85.8	74.1	55.6	60.2	50.9	137.8			
150.9	95.2	95.5	96.1	81.6	71.0	54.0	58.2	49.6	35.1	89.6	89.9	90.6	84.4	73.0	55.0	59.2	50.2	150.9			
154.2	92.4	92.6	93.0	80.2	69.9	53.4	57.2	48.8													

	99,200 lb	187,400 lb	275,600 lb	363,800 lb	408,000 lb	452,000 lb
		0 lb			66,100 lb	110,200 lb

LH + LF

SUPERLIFT 3800

39.4-118.1 ft										27.6 ft			32.2 ft/s			360°			ISO		
196.9 ft										216.5 ft											
LH+LF_1																					
39.4 ft			78.7 ft			118.1 ft			39.4 ft			78.7 ft			118.1 ft						
15°	20°	30°	15°	20°	30°	15°	20°	30°	15°	20°	30°	15°	20°	30°	15°	20°	30°				
ft																		1,000 lb		ft	
36.1	392.4	-	-	-	-	-	-	-	-	-	-	370.4	-	-	-	-	-	36.1			
39.4	379.2	291.0	-	-	-	-	-	-	-	-	-	359.4	286.6	-	-	-	-	39.4			
42.7	364.9	282.2	-	-	-	-	-	-	-	-	-	348.3	277.8	181.9	-	-	-	42.7			
45.9	350.5	273.4	180.8	-	-	-	-	-	-	-	-	337.3	271.2	178.6	-	-	-	45.9			
49.2	338.4	265.7	176.9	190.7	-	-	-	-	-	-	-	326.3	264.6	175.3	186.3	-	-	49.2			
52.5	326.3	257.9	173.1	184.1	-	-	-	-	-	-	-	317.5	257.9	172.0	180.8	-	-	52.5			
55.8	316.4	251.3	169.8	178.0	140.0	-	-	-	-	-	-	308.6	251.3	168.7	175.3	137.8	-	55.8			
59.1	306.4	244.7	166.4	172.0	135.6	-	-	-	-	-	-	292.1	244.7	165.3	170.3	134.5	-	59.1			
62.3	296.5	238.1	163.1	167.0	132.3	-	115.7	-	-	-	-	275.6	238.1	162.0	165.3	131.2	112.4	62.3			
65.6	286.6	231.5	159.8	162.0	129.0	-	112.4	-	-	-	-	262.4	232.6	159.3	160.9	127.9	84.0	65.6			
68.9	272.3	226.0	157.1	157.1	125.7	83.8	109.2	-	-	-	-	249.1	227.1	156.5	156.5	124.6	82.5	68.9			
72.2	257.9	220.5	154.3	152.1	122.4	82.0	106.0	85.1	-	-	-	237.0	222.7	154.3	152.1	121.8	81.0	72.2			
75.5	245.8	216.1	151.6	147.7	119.6	80.6	103.2	83.0	-	-	-	208.3	218.3	152.1	147.7	119.0	79.6	75.5			
78.7	233.7	211.6	148.8	143.3	116.8	79.1	100.3	80.9	-	-	-	206.1	208.3	146.6	141.1	113.5	77.2	78.7			
85.3	209.4	202.8	144.4	136.7	111.3	76.5	95.5	77.2	-	-	-	185.2	186.3	142.2	133.4	109.3	74.7	85.3			
91.9	188.5	189.6	140.0	129.0	106.7	73.9	90.8	73.9	48.5	-	-	167.6	168.7	138.9	127.9	104.9	72.3	91.9			
98.4	169.8	170.9	135.6	123.5	102.3	71.4	86.6	70.8	46.7	-	-	138.9	140.0	131.2	116.8	97.2	68.1	98.4			
111.5	141.1	142.2	127.9	112.4	94.4	67.2	78.9	65.0	43.7	-	-	116.8	117.9	119.0	108.2	90.6	64.6	111.5			
124.7	120.2	120.2	122.4	104.1	87.7	63.3	72.1	60.2	40.8	-	-	100.1	101.0	102.1	100.5	84.9	61.3	124.7			
137.8	103.2	103.8	104.9	96.3	82.0	60.0	66.6	56.0	38.4	-	-	86.2	86.9	88.0	91.9	79.8	58.4	137.8			
150.9	89.3	89.9	90.8	89.9	76.9	57.1	61.9	52.2	36.2	-	-	75.0	75.4	76.3	80.2	75.4	55.8	150.9			
164.0	78.0	78.5	79.4	83.1	72.8	54.5	58.2	49.4	34.4	-	-	65.3	65.7	66.6	70.5	71.4	53.6	164.0			
177.2	68.6	69.0	69.7	73.2	69.0	52.2	54.9	46.7	32.8	-	-	61.0	61.4	62.2	66.4	67.2					

	99,200 lb	187,400 lb	275,600 lb	363,800 lb	408,000 lb	452,000 lb
	0 lb				66,100 lb	110,200 lb

LH+LF

SUPERLIFT 3800

39.4-118.1 ft														27.6 ft				32.2 ft/s				360°				ISO	
	236.2 ft												246.1 ft														
	LH+LF_1			LH+LF_3			LH+LF_1			LH+LF_3																	
	39.4 ft						78.7 ft			118.1 ft			39.4 ft														
	15°	20°	30°	15°	20°	15°	20°	30°	15°	20°	30°	15°	20°														
ft	1,000 lb														ft												
39.4	352.7	-	-	341.7	-	-	-	-	-	-	-	-	339.5	-	39.4												
42.7	342.8	291.0	-	335.1	251.3	-	-	-	-	-	-	-	334.0	-	42.7												
45.9	332.9	282.2	-	328.5	244.7	-	-	-	-	-	-	-	328.5	246.9	45.9												
49.2	324.1	275.6	179.7	319.7	239.2	-	-	-	-	-	-	-	321.9	240.3	49.2												
52.5	315.3	269.0	176.4	310.9	233.7	187.4	-	-	-	-	-	-	315.3	233.7	52.5												
59.1	297.6	255.7	170.9	293.2	222.7	176.4	138.9	-	-	-	-	-	291.0	224.9	59.1												
65.6	266.8	244.7	164.2	266.8	212.7	167.6	132.3	-	113.5	-	-	-	262.4	215.0	65.6												
72.2	240.3	233.7	159.8	240.3	202.8	158.7	126.8	82.7	107.8	-	-	-	235.9	205.0	72.2												
75.5	229.8	227.1	157.1	229.3	199.0	155.4	124.0	81.4	105.2	83.6	-	-	224.9	201.2	75.5												
78.7	219.4	220.5	154.3	218.3	195.1	152.1	121.3	80.0	102.5	81.6	-	-	213.8	197.3	78.7												
85.3	199.5	201.7	149.9	199.5	187.4	144.4	115.7	77.6	97.7	78.3	-	-	195.1	189.6	85.3												
91.9	183.0	185.2	145.5	183.0	180.8	137.8	111.3	75.2	93.3	75.2	-	-	179.7	180.8	91.9												
95.1	174.2	175.8	143.3	174.2	173.6	134.5	109.5	74.1	91.4	73.7	47.6	-	172.0	173.1	95.1												
98.4	165.3	166.4	141.1	165.3	166.4	131.2	107.6	73.0	89.5	72.3	46.7	-	164.2	165.3	98.4												
111.5	136.7	137.8	134.5	136.7	137.8	121.3	99.9	69.0	82.2	67.0	44.1	-	134.5	136.7	111.5												
124.7	114.6	115.7	116.8	114.6	115.7	111.3	93.3	65.5	75.8	62.4	41.4	-	113.5	113.5	124.7												
137.8	98.1	98.8	100.3	97.7	98.5	104.3	87.3	62.4	70.1	58.4	39.2	-	96.1	97.0	137.8												
150.9	84.2	84.9	86.0	83.8	84.7	90.2	82.5	59.7	65.3	54.7	37.3	-	82.2	82.9	150.9												
164.0	72.8	73.2	74.3	72.3	73.0	78.5	77.8	57.1	61.3	51.6	35.3	-	70.3	71.2	164.0												
177.2	62.6	63.1	64.2	62.2	62.8	68.6	69.7	54.9	58.0	48.9	33.7	-	60.2	60.8	177.2												
190.3	54.0	54.5	55.3	53.6	54.0	60.0	61.1	52.9	55.1	46.5	32.4	-	51.6	52.0	190.3												
203.4	46.5	47.0	47.6	46.1	46.5	52.2	53.1	51.1	52.2	44.5	31.1	-	44.1	44.5	203.4												
210.0	43.3	43.8	44.3	43.0	43.3	48.8	49.7	50.3	50.9	43.4	30.5	-	40.9	41.3	210.0												
216.5	40.1	40.6	-	39.9	40.1	45.4	46.3	47.8	49.4	42.3	30.0	-	37.7	38.1	216.5												
229.7	34.6	35.1	-	34.4	34.6	39.7	40.3	41.7	43.4	40.6	28.9	-	32.2	32.4	229.7												
236.2	32.3	32.4	-	32.0	32.2	37.1	37.7	38.9	40.8	39.8	28.4	-	29.8	30.0	236.2												
242.8	30.0	-	-	29.5	-	34.6	35.1	36.2	38.1	39.0	28.0	-	27.3	27.6	242.8												
249.3	27.8	-	-	27.3	-	32.3	32.8	33.7	35.7	36.7	27.7	-	25.2	-	249.3												
255.9	-	-	-	-	-	30.0	30.4	-	33.3	34.4	27.3	-	23.1	-	255.9												
269.0	-	-	-	-	-	25.8	26.2	-	29.1	30.0	26.7	-	-	-	269.0												
275.6	-	-	-	-	-	24.0	24.5	-	27.2	28.0	26.5	-	-	-	275.6												
282.2	-	-	-	-	-	22.3	-	-	25.4	26.0	26.2	-	-	-	282.2												
285.4	-	-	-	-	-	21.4	-	-	24.5	25.1	26.0	-	-	-	285.4												
295.3	-	-	-	-	-	-	-	-	21.8	22.5	-	-	-	-	295.3												
308.4	-	-	-	-	-	-	-	-	18.7	19.2	-	-	-	-	308.4												
311.7	-	-	-	-	-	-	-	-	18.0	18.3	-	-	-	-	311.7												
321.5	-	-	-	-	-	-	-	-	15.7	-	-	-	-	-	321.5												
324.8	-	-	-	-	-	-	-	-	15.0	-	-	-	-	-	324.8												

99,200 lb	187,400 lb	275,600 lb	363,800 lb	408,000 lb	452,000 lb
0 lb					
66,100 lb					
110,200 lb					



LH+LF

SUPERLIFT 3800

+ 39.4-118.1 ft 27.6 ft 32.2 ft/s 360° ISO														
255.9 ft 265.7 ft														
LH+LF_1 LH+LF_3 LH+LF_1 LH+LF_3														
39.4 ft 78.7 ft 118.1 ft 39.4 ft														
15° 20° 30° 15° 20° 15° 20° 30° 15° 20° 30° 15° 20°														
ft														
1,000 lb														
ft														
42.7	319.7	-	-	348.3	-	-	-	-	-	-	-	350.5	-	42.7
45.9	310.9	275.6	-	337.3	249.1	-	-	-	-	-	-	341.7	249.1	45.9
52.5	293.2	262.4	178.6	317.5	235.9	-	-	-	-	-	-	319.7	238.1	52.5
55.8	285.5	255.7	175.3	303.1	230.4	177.5	-	-	-	-	-	302.0	232.6	55.8
59.1	277.8	249.1	172.0	288.8	224.9	174.2	-	-	-	-	-	284.4	227.1	59.1
62.3	266.8	243.6	169.2	274.5	221.0	170.3	136.7	-	-	-	-	269.0	222.7	62.3
65.6	255.7	238.1	166.4	260.1	217.2	166.4	133.4	-	-	-	-	253.5	218.3	65.6
68.9	243.6	232.6	163.7	246.9	212.2	162.6	130.6	-	110.2	-	-	241.4	213.8	68.9
72.2	231.5	227.1	160.9	233.7	207.2	158.7	127.9	82.9	108.2	-	-	229.3	209.4	72.2
78.7	210.5	212.7	156.5	213.8	199.5	152.1	122.4	80.2	103.2	81.8	-	208.3	201.7	78.7
85.3	191.8	194.0	152.1	195.1	191.8	145.5	117.9	78.0	98.3	78.7	-	190.7	192.9	85.3
91.9	176.4	177.5	147.7	179.7	180.8	138.9	113.5	75.8	94.1	75.6	-	175.3	176.4	91.9
95.1	169.2	170.3	146.1	172.5	173.6	136.1	111.7	74.7	92.3	74.2	47.6	168.1	169.2	95.1
98.4	162.0	163.1	144.4	165.3	166.4	133.4	109.8	73.6	90.4	72.8	47.0	160.9	162.0	98.4
111.5	133.4	134.5	136.7	136.7	137.8	123.5	102.3	69.9	83.6	67.9	44.1	134.5	135.6	111.5
124.7	111.3	112.4	114.6	114.6	115.7	113.5	95.7	66.4	77.4	63.3	41.7	112.4	113.5	124.7
137.8	95.0	95.9	97.4	97.7	98.3	101.9	89.7	63.3	71.9	59.3	39.5	95.5	96.3	137.8
150.9	80.9	81.8	83.1	83.8	84.4	87.5	84.7	60.6	67.0	55.8	37.5	81.4	82.2	150.9
164.0	69.0	69.7	71.0	72.1	72.8	75.6	76.9	58.2	62.8	52.7	35.7	69.4	70.1	164.0
177.2	58.6	59.3	60.6	61.9	62.6	65.5	67.0	56.0	59.3	49.8	34.2	59.1	59.7	177.2
190.3	50.0	50.7	51.6	53.4	53.8	56.4	57.8	54.0	56.4	47.6	32.8	50.5	51.1	190.3
203.4	42.5	43.2	44.1	45.9	46.3	48.7	49.8	52.0	53.4	45.4	31.5	43.0	43.7	203.4
216.5	36.2	36.6	37.5	39.5	39.9	42.1	43.0	44.8	46.5	43.4	30.4	36.6	37.0	216.5
223.1	33.4	33.8	34.4	36.7	37.0	39.1	40.0	41.7	43.4	42.5	29.9	33.8	34.3	223.1
229.7	30.6	31.1	-	34.0	34.4	36.2	37.0	38.6	40.3	41.7	29.3	31.1	31.5	229.7
242.8	25.8	26.0	-	29.1	29.3	31.1	31.7	33.1	35.1	36.2	28.4	26.2	26.5	242.8
252.6	22.6	22.9	-	26.0	26.0	27.6	28.3	29.4	31.4	32.5	27.8	22.9	23.1	252.6
255.9	21.6	-	-	24.9	-	26.5	27.1	28.2	30.2	31.3	27.6	21.8	22.0	255.9
259.2	20.6	-	-	23.9	-	25.4	26.1	27.1	29.2	30.2	27.4	20.9	21.2	259.2
262.5	19.7	-	-	22.9	-	24.4	25.0	26.0	28.1	29.1	27.2	20.0	-	262.5
265.7	18.7	-	-	22.0	-	23.3	24.0	-	27.1	28.0	27.1	19.0	-	265.7
269.0	-	-	-	-	-	22.3	22.9	-	26.0	26.9	26.9	18.1	-	269.0
272.3	-	-	-	-	-	21.3	22.0	-	25.0	25.9	26.3	17.2	-	272.3
282.2	-	-	-	-	-	18.5	19.2	-	22.0	22.9	24.5	-	-	282.2
292.0	-	-	-	-	-	16.0	16.5	-	19.4	20.3	21.6	-	-	292.0
295.3	-	-	-	-	-	15.2	-	-	18.5	19.4	20.7	-	-	295.3
301.8	-	-	-	-	-	13.7	-	-	17.0	17.7	19.0	-	-	301.8
308.4	-	-	-	-	-	-	-	-	15.4	16.1	-	-	-	308.4
321.5	-	-	-	-	-	-	-	-	12.6	13.0	-	-	-	321.5
328.1	-	-	-	-	-	-	-	-	11.1	11.7	-	-	-	328.1
334.6	-	-	-	-	-	-	-	-	9.7	-	-	-	-	334.6
341.2	-	-	-	-	-	-	-	-	8.6	-	-	-	-	341.2

	99,200 lb	187,400 lb	275,600 lb	363,800 lb	408,000 lb	452,000 lb
	0 lb				66,100 lb	110,200 lb



LH+LF

SUPERLIFT 3800

+ 39.4-118.1 ft														27.6 ft						32.2 ft/s						360°		ISO	
	275.6 ft												285.4 ft																
	LH+LF_1			LH+LF_3			LH+LF_1			LH+LF_3																			
	39.4 ft			78.7 ft			118.1 ft			39.4 ft																			
	15°	20°	30°	15°	20°	15°	20°	30°	15°	20°	30°	15°	20°																
ft	1,000 lb														ft														
42.7	302.0	-	-	339.5	-	-	-	-	-	-	-	-	-	-	-	42.7													
45.9	297.6	273.4	-	332.9	251.3	-	-	-	-	-	-	-	-	321.9	-	45.9													
49.2	294.3	271.2	-	323.0	245.8	-	-	-	-	-	-	-	-	314.2	246.9	49.2													
52.5	291.0	269.0	179.7	313.1	240.3	-	-	-	-	-	-	-	-	306.4	240.3	52.5													
55.8	283.3	265.7	176.9	296.5	234.8	177.5	-	-	-	-	-	-	-	289.9	235.9	55.8													
59.1	275.6	262.4	174.2	280.0	229.3	174.2	-	-	-	-	-	-	-	273.4	231.5	59.1													
62.3	262.4	256.8	171.4	264.6	224.9	172.0	136.7	-	-	-	-	-	-	259.0	227.1	62.3													
65.6	249.1	251.3	168.7	249.1	220.5	169.8	133.4	-	-	-	-	-	-	244.7	222.7	65.6													
68.9	237.0	239.2	165.9	237.0	216.1	166.4	131.2	-	110.2	-	-	-	-	232.6	218.3	68.9													
72.2	224.9	227.1	163.1	224.9	211.6	163.1	129.0	-	108.0	-	-	-	-	220.5	213.8	72.2													
75.5	215.0	217.2	160.9	215.5	207.8	159.3	126.2	81.6	105.7	-	-	-	-	210.5	208.3	75.5													
78.7	205.0	207.2	158.7	206.1	203.9	155.4	123.5	80.5	103.4	81.6	-	-	-	200.6	202.8	78.7													
85.3	187.4	188.5	154.3	187.4	189.6	148.8	119.0	78.3	99.0	78.7	-	-	-	183.0	185.2	85.3													
91.9	170.9	173.1	149.9	172.0	174.2	143.3	115.7	76.1	95.0	75.8	-	-	-	167.6	169.8	91.9													
98.4	157.6	158.7	146.6	158.7	159.8	137.8	111.3	74.3	91.3	73.2	46.7	-	-	154.3	155.4	98.4													
111.5	133.4	134.5	136.7	133.4	134.5	127.9	104.5	70.5	84.9	68.3	44.1	-	-	131.2	132.3	111.5													
124.7	111.3	112.4	113.5	111.3	112.4	117.9	97.9	67.2	78.9	64.2	41.9	-	-	109.6	110.2	124.7													
137.8	93.9	94.8	96.6	94.6	95.5	101.0	92.2	64.4	73.6	60.4	39.9	-	-	92.4	93.3	137.8													
150.9	80.0	80.7	82.2	80.7	81.4	86.4	87.1	61.7	68.8	56.9	37.9	-	-	77.8	78.9	150.9													
164.0	67.7	68.6	70.1	68.3	69.2	74.7	76.1	59.3	64.6	53.8	36.2	-	-	65.7	66.6	164.0													
177.2	57.5	58.2	59.5	58.2	58.9	64.4	65.9	57.1	61.1	50.9	34.6	-	-	55.3	56.2	177.2													
190.3	48.7	49.4	50.5	49.6	50.0	55.3	56.7	54.9	58.0	48.7	33.3	-	-	46.5	47.4	190.3													
203.4	41.4	41.9	42.8	42.1	42.5	47.6	48.7	50.9	52.2	46.7	32.0	-	-	39.2	39.7	203.4													
216.5	34.8	35.5	36.2	35.7	36.2	40.8	41.9	43.9	45.2	44.8	30.9	-	-	32.6	33.3	216.5													
229.7	29.3	29.8	30.4	30.0	30.4	35.1	35.9	37.5	39.2	40.6	29.8	-	-	27.1	27.6	229.7													
239.5	25.7	26.0	26.7	26.3	26.8	31.1	32.0	33.4	35.1	36.4	29.1	-	-	23.3	23.7	239.5													
242.8	24.5	24.7	-	25.1	25.6	29.8	30.6	32.0	33.7	35.1	28.9	-	-	22.0	22.5	242.8													
255.9	20.1	20.5	-	20.7	21.2	25.1	25.8	27.1	28.9	30.2	28.2	-	-	17.9	18.1	255.9													
265.7	17.3	17.5	-	17.9	18.1	21.9	22.7	23.8	25.7	26.9	27.6	-	-	14.8	15.2	265.7													
269.0	16.3	16.5	-	17.0	-	20.9	21.6	22.7	24.7	25.8	27.3	-	-	13.9	14.1	269.0													
275.6	14.6	-	-	15.4	-	19.2	19.7	20.7	22.8	23.8	25.5	-	-	12.2	12.3	275.6													
282.2	13.0	-	-	13.7	-	17.4	17.9	-	20.7	21.8	23.6	-	-	10.6	-	282.2													
292.0	-	-	-	-	-	14.8	15.4	-	18.1	19.0	20.6	-	-	8.4	-	292.0													
295.3	-	-	-	-	-	13.9	14.6	-	17.2	18.1	19.6	-	-	-	-	295.3													
308.4	-	-	-	-	-	11.0	11.5	-	14.1	15.0	16.1	-	-	-	-	308.4													
315.0	-	-	-	-	-	9.7	-	-	12.7	13.4	14.6	-	-	-	-	315.0													
321.5	-	-	-	-	-	8.4	-	-	11.2	11.9	-	-	-	-	-	321.5													
334.6	-	-	-	-	-	-	-	-	8.6	9.0	-	-	-	-	-	334.6													
337.9	-	-	-	-	-	-	-	-	7.9	8.4	-	-	-	-	-	337.9													
341.2	-	-	-	-	-	-	-	-	-	7.7	-	-	-	-	-	341.2													

	99,200 lb	187,400 lb	275,600 lb	363,800 lb	408,000 lb	452,000 lb
	0 lb		66,100 lb		110,200 lb	



LH+LF

SUPERLIFT 3800

+ 39.4-118.1 ft														27.6 ft				32.2 ft/s				360°		ISO	
	295.3 ft												305.1 ft												
	LH+LF_1				LH+LF_3				LH+LF_1				LH+LF_3												
	39.4 ft						78.7 ft			118.1 ft			39.4 ft												
	15°	20°	30°	15°	20°	15°	20°	30°	15°	20°	30°	15°	20°												
ft	1,000 lb														ft										
45.9	277.8	-	-	299.8	-	-	-	-	-	-	-	-	288.8	-	45.9										
49.2	274.5	249.1	-	295.4	249.1	-	-	-	-	-	-	-	284.4	249.1	49.2										
52.5	271.2	246.9	-	291.0	242.5	-	-	-	-	-	-	-	280.0	244.7	52.5										
55.8	265.7	243.6	177.5	280.0	238.1	-	-	-	-	-	-	-	272.3	239.2	55.8										
59.1	260.1	240.3	175.3	269.0	233.7	163.1	-	-	-	-	-	-	264.6	233.7	59.1										
65.6	240.3	233.7	169.8	242.5	222.7	158.7	133.4	-	-	-	-	-	235.9	224.9	65.6										
72.2	217.2	219.4	165.3	219.4	215.0	155.4	129.0	-	106.3	-	-	-	213.8	216.1	72.2										
75.5	207.2	208.9	163.1	209.4	208.3	153.2	126.8	81.6	104.5	-	-	-	203.9	206.1	75.5										
78.7	197.3	198.4	160.9	199.5	201.7	151.0	124.6	80.5	102.7	-	-	-	194.0	196.2	78.7										
82.0	188.5	190.1	158.7	190.7	192.9	148.8	122.4	79.4	101.0	80.0	-	-	185.7	187.4	82.0										
85.3	179.7	181.9	156.5	181.9	184.1	146.6	120.2	78.3	99.2	78.7	-	-	177.5	178.6	85.3										
91.9	164.2	166.4	152.1	166.4	168.7	142.2	115.7	76.3	95.5	75.8	-	-	162.0	164.2	91.9										
98.4	151.0	152.1	148.8	153.2	154.3	137.8	112.4	74.5	91.9	73.4	46.5	-	148.8	151.0	98.4										
111.5	127.9	130.1	132.3	131.2	132.3	129.0	106.3	71.0	85.5	68.8	44.1	-	126.8	127.9	111.5										
124.7	108.2	109.6	111.3	110.0	110.2	112.4	99.9	67.9	79.8	64.8	41.9	-	107.8	109.1	124.7										
137.8	90.8	91.9	93.7	92.8	93.7	98.1	94.1	65.0	74.7	61.1	39.9	-	90.4	91.5	137.8										
150.9	76.3	77.4	79.1	78.5	79.4	84.0	85.8	62.4	70.1	57.5	38.1	-	75.8	76.7	150.9										
164.0	63.9	65.0	66.6	66.1	67.0	71.9	73.6	60.2	65.9	54.5	36.4	-	63.5	64.4	164.0										
177.2	53.8	54.5	56.0	56.0	56.7	61.1	62.8	58.0	62.2	51.8	34.8	-	53.1	54.0	177.2										
190.3	45.0	45.6	47.0	47.2	47.8	52.0	53.6	56.0	57.3	49.4	33.5	-	44.3	45.0	190.3										
203.4	37.5	38.1	39.2	39.7	40.3	44.3	45.6	48.1	49.2	47.4	32.4	-	36.8	37.5	203.4										
216.5	31.1	31.5	32.6	33.3	33.7	37.5	38.6	40.8	42.1	44.1	31.3	-	30.4	30.9	216.5										
229.7	25.4	26.0	26.7	27.6	28.0	31.5	32.6	34.4	36.2	37.7	30.2	-	24.7	25.1	229.7										
242.8	20.5	20.9	21.6	22.7	23.1	26.2	27.3	28.9	30.6	32.2	29.3	-	19.8	20.3	242.8										
252.6	17.2	17.6	18.1	19.4	19.8	22.7	23.6	25.2	27.0	28.4	28.7	-	16.5	16.8	252.6										
255.9	16.1	16.5	-	18.3	18.7	21.6	22.5	24.0	25.8	27.1	28.4	-	15.4	15.7	255.9										
269.0	12.3	12.6	-	14.6	14.8	17.4	18.3	19.6	21.6	22.7	24.9	-	11.5	11.9	269.0										
282.2	8.8	9.0	-	11.0	11.2	13.7	14.3	15.4	17.6	18.7	20.7	-	7.9	8.4	282.2										
285.4	8.2	8.4	-	10.3	-	12.8	13.5	14.6	16.8	17.8	19.7	-	-	-	285.4										
292.0	-	-	-	8.9	-	11.2	11.8	12.8	15.0	15.9	17.7	-	-	-	292.0										
295.3	-	-	-	8.2	-	10.4	11.0	-	14.1	15.0	16.8	-	-	-	295.3										
305.1	-	-	-	-	-	8.2	8.7	-	11.6	12.6	14.1	-	-	-	305.1										
308.4	-	-	-	-	-	-	7.9	-	10.8	11.7	13.2	-	-	-	308.4										
321.5	-	-	-	-	-	-	-	-	7.9	8.8	10.1	-	-	-	321.5										
324.8	-	-	-	-	-	-	-	-	-	7.9	9.4	-	-	-	324.8										
328.1	-	-	-	-	-	-	-	-	-	-	8.6	-	-	-	328.1										

99,200 lb	187,400 lb	275,600 lb	363,800 lb	408,000 lb	452,000 lb
0 lb		66,100 lb	110,200 lb		



LH+LF

SUPERLIFT 3800

39.4-118.1 ft														27.6 ft				32.2 ft/s				360°		ISO	
	315.0 ft												324.8 ft												
	LH+LF_1			LH+LF_3			LH+LF_1			LH+LF_3															
	39.4 ft			78.7 ft			118.1 ft			39.4 ft															
	15°	20°	30°	15°	20°	15°	20°	30°	15°	20°	30°	15°	20°												
ft	1,000 lb												ft												
45.9	246.9	-	-	275.6	-	-	-	-	-	-	-	-	-	45.9											
49.2	243.6	224.9	-	271.2	251.3	-	-	-	-	-	-	-	260.1	-	49.2										
52.5	240.3	222.7	-	266.8	244.7	-	-	-	-	-	-	-	255.7	246.9	52.5										
55.8	238.1	219.9	178.6	262.4	240.3	-	-	-	-	-	-	-	251.3	241.4	55.8										
59.1	235.9	217.2	176.4	257.9	235.9	147.7	-	-	-	-	-	-	246.9	235.9	59.1										
65.6	229.3	211.6	170.9	233.7	227.1	144.4	124.6	-	-	-	-	-	227.1	227.1	65.6										
72.2	209.4	206.1	166.4	210.5	212.7	140.0	121.3	-	-	-	-	-	205.0	208.3	72.2										
75.5	200.1	199.5	164.2	201.2	203.4	137.8	120.2	-	96.8	-	-	-	195.7	198.4	75.5										
78.7	190.7	192.9	162.0	191.8	194.0	135.6	119.0	80.2	95.7	-	-	-	186.3	188.5	78.7										
82.0	181.9	184.1	159.8	183.0	185.2	133.9	117.4	79.3	94.5	79.4	-	-	178.0	180.2	82.0										
85.3	173.1	175.3	157.6	174.2	176.4	132.3	115.7	78.3	93.3	78.0	-	-	169.8	172.0	85.3										
91.9	158.7	160.9	154.3	159.8	162.0	127.9	112.4	76.3	90.8	75.6	-	-	155.4	156.5	91.9										
98.4	145.5	147.7	149.9	146.6	148.8	123.5	110.0	74.5	88.4	73.2	-	-	142.2	144.4	98.4										
101.7	140.0	141.9	144.4	141.1	143.0	121.8	108.5	73.7	87.2	72.1	45.6	-	136.7	138.9	101.7										
111.5	123.5	124.6	127.9	124.6	125.7	116.8	104.1	71.2	83.6	68.8	44.1	-	120.2	122.4	111.5										
124.7	106.0	107.4	109.8	107.1	108.2	108.9	98.8	68.1	78.9	64.8	41.9	-	103.2	104.5	124.7										
137.8	89.1	89.9	91.9	89.7	90.8	94.1	93.5	65.5	74.5	61.3	39.9	-	87.1	88.4	137.8										
150.9	74.1	75.2	77.2	75.0	75.8	81.8	83.8	62.8	70.3	58.0	38.1	-	72.1	73.2	150.9										
164.0	61.7	62.6	64.4	62.6	63.5	69.7	71.7	60.6	66.6	55.1	36.6	-	59.7	60.6	164.0										
177.2	51.4	52.2	53.8	52.2	53.1	59.1	60.8	58.6	63.1	52.5	35.1	-	49.4	50.3	177.2										
190.3	42.5	43.4	44.8	43.4	44.1	49.8	51.4	54.2	55.3	50.0	33.7	-	40.6	41.4	190.3										
203.4	35.1	35.7	37.0	35.9	36.6	42.1	43.4	46.1	47.2	47.8	32.6	-	33.1	33.7	203.4										
216.5	28.7	29.1	30.2	29.3	30.0	35.3	36.6	38.8	40.1	42.1	31.5	-	26.5	27.1	216.5										
229.7	22.9	23.4	24.5	23.8	24.3	29.3	30.4	32.6	34.0	35.7	30.4	-	20.7	21.4	229.7										
242.8	17.9	18.5	19.2	18.7	19.2	24.0	25.1	26.9	28.7	30.2	29.5	-	15.9	16.3	242.8										
255.9	13.7	13.9	14.8	14.3	14.8	19.4	20.3	22.0	23.8	25.1	28.0	-	11.2	11.9	255.9										
265.7	10.7	11.1	11.7	11.5	11.8	16.3	17.1	18.6	20.5	21.8	24.4	-	8.4	8.8	265.7										
269.0	9.7	10.1	-	10.6	10.8	15.2	16.1	17.4	19.4	20.7	23.1	-	-	7.7	269.0										
275.6	7.9	8.2	-	8.8	9.0	13.3	14.0	15.5	17.4	18.7	21.0	-	-	-	275.6										
278.9	-	-	-	7.9	8.2	12.4	13.1	14.6	16.4	17.7	20.0	-	-	-	278.9										
282.2	-	-	-	-	-	11.5	12.1	13.4	15.4	16.8	19.0	-	-	-	282.2										
295.3	-	-	-	-	-	8.2	8.8	9.9	11.9	13.0	15.0	-	-	-	295.3										
298.6	-	-	-	-	-	-	7.9	9.0	11.1	12.2	14.1	-	-	-	298.6										
301.8	-	-	-	-	-	-	-	8.2	10.4	11.4	13.2	-	-	-	301.8										
308.4	-	-	-	-	-	-	-	-	8.8	9.7	11.5	-	-	-	308.4										
311.7	-	-	-	-	-	-	-	-	7.9	8.9	10.6	-	-	-	311.7										
315.0	-	-	-	-	-	-	-	-	-	8.2	9.8	-	-	-	315.0										
321.5	-	-	-	-	-	-	-	-	-	-	8.2	-	-	-	321.5										

99,200 lb	187,400 lb	275,600 lb	363,800 lb	408,000 lb	452,000 lb
0 lb					
			66,100 lb	110,200 lb	



LH+LF

SUPERLIFT 3800

39.4-118.1 ft														27.6 ft				32.2 ft/s				360°		ISO	
334.6 ft														344.5 ft											
LH+LF_1				LH+LF_3				LH+LF_1				LH+LF_3													
39.4 ft				78.7 ft				118.1 ft				39.4 ft													
15°		20°		30°		15°		20°		15°		20°		30°		15°		20°							
1,000 lb																									
49.2	227.1	-	-	253.5	-	-	-	-	-	-	-	242.5	-	-	-	49.2	227.1	-	-						
52.5	224.9	207.2	-	249.1	242.5	-	-	-	-	-	-	238.1	233.7	-	-	52.5	224.9	207.2	-						
59.1	219.4	201.7	167.6	244.7	238.1	-	-	-	-	-	-	233.7	229.3	-	-	59.1	219.4	201.7	167.6						
62.3	216.6	198.4	165.3	233.7	231.5	136.7	-	-	-	-	-	226.5	224.9	-	-	62.3	216.6	198.4	165.3						
65.6	213.8	195.1	163.1	222.7	224.9	134.5	-	-	-	-	-	219.4	220.5	-	-	65.6	213.8	195.1	163.1						
68.9	207.8	192.4	161.5	212.2	214.4	132.8	115.7	-	-	-	-	208.3	210.0	-	-	68.9	207.8	192.4	161.5						
72.2	201.7	189.6	159.8	201.7	203.9	131.2	113.5	-	-	-	-	197.3	199.5	-	-	72.2	201.7	189.6	159.8						
75.5	192.4	186.8	157.6	192.4	194.6	129.0	112.4	-	90.6	-	-	187.9	190.1	-	-	75.5	192.4	186.8	157.6						
78.7	183.0	184.1	155.4	183.0	185.2	126.8	111.3	80.0	89.5	-	-	178.6	180.8	-	-	78.7	183.0	184.1	155.4						
85.3	166.4	168.7	151.0	166.4	168.7	123.5	108.5	78.0	87.1	74.7	-	163.1	165.3	-	-	85.3	166.4	168.7	151.0						
91.9	152.1	153.2	146.6	152.1	154.3	119.0	105.4	76.3	84.7	73.0	-	148.8	151.0	-	-	91.9	152.1	153.2	146.6						
98.4	138.9	141.1	143.3	138.9	141.1	114.6	102.3	74.5	82.5	71.2	-	135.6	137.8	-	-	98.4	138.9	141.1	143.3						
101.7	133.7	135.6	138.1	133.7	135.6	113.0	100.9	73.7	81.2	70.3	45.4	130.1	132.3	-	-	101.7	133.7	135.6	138.1						
111.5	117.9	119.0	122.4	117.9	119.0	108.2	96.6	71.4	77.6	67.7	43.9	114.6	115.7	-	-	111.5	117.9	119.0	122.4						
124.7	100.3	101.9	104.3	100.5	101.9	101.4	91.3	68.6	73.2	64.4	41.9	97.7	99.0	-	-	124.7	100.3	101.9	104.3						
137.8	85.5	86.9	89.3	85.5	86.9	89.1	86.2	65.9	68.8	61.1	39.9	83.1	84.4	-	-	137.8	85.5	86.9	89.3						
150.9	70.3	71.7	73.9	70.5	71.7	76.9	79.1	63.3	64.8	58.0	38.4	68.6	69.9	-	-	150.9	70.3	71.7	73.9						
164.0	58.0	59.1	61.1	58.2	59.1	66.6	68.6	61.1	61.1	54.9	36.6	56.2	57.3	-	-	164.0	58.0	59.1	61.1						
177.2	47.6	48.5	50.3	47.8	48.7	55.8	57.8	59.1	57.5	52.2	35.3	45.9	46.7	-	-	177.2	47.6	48.5	50.3						
190.3	38.8	39.7	41.2	39.0	39.7	46.7	48.3	51.4	52.0	49.6	34.0	37.0	37.9	-	-	190.3	38.8	39.7	41.2						
203.4	31.3	32.0	33.3	31.3	32.2	38.8	40.3	43.2	44.3	46.5	32.6	29.3	30.2	-	-	203.4	31.3	32.0	33.3						
216.5	24.7	25.4	26.7	24.9	25.6	32.0	33.3	35.9	37.3	39.2	31.5	22.9	23.6	-	-	216.5	24.7	25.4	26.7						
229.7	19.2	19.6	20.7	19.2	19.8	26.0	27.1	29.5	31.1	32.8	30.9	17.2	17.9	-	-	229.7	19.2	19.6	20.7						
242.8	14.1	14.6	15.4	14.1	14.6	20.7	21.8	23.8	25.6	27.3	30.0	12.1	12.6	-	-	242.8	14.1	14.6	15.4						
252.6	10.8	11.2	12.1	10.8	11.2	17.1	18.2	20.0	21.9	23.4	26.3	8.6	9.3	-	-	252.6	10.8	11.2	12.1						
255.9	9.7	10.1	11.0	9.7	10.1	15.9	17.0	18.7	20.7	22.3	25.1	-	8.2	-	-	255.9	9.7	10.1	11.0						
259.2	8.6	9.1	9.9	8.6	9.1	14.8	15.9	17.6	19.6	21.1	23.9	-	-	-	-	259.2	8.6	9.1	9.9						
262.5	-	8.2	8.8	-	8.2	13.7	14.8	16.5	18.5	20.0	22.7	-	-	-	-	262.5	-	8.2	8.8						
265.7	-	-	7.7	-	-	12.7	13.8	15.4	17.4	18.8	21.6	-	-	-	-	265.7	-	-	7.7						
269.0	-	-	-	-	-	11.7	12.8	14.3	16.3	17.6	20.5	-	-	-	-	269.0	-	-	-						
282.2	-	-	-	-	-	7.9	8.8	10.4	12.3	13.7	16.1	-	-	-	-	282.2	-	-	-						
285.4	-	-	-	-	-	-	7.9	9.4	11.5	12.7	15.1	-	-	-	-	285.4	-	-	-						
288.7	-	-	-	-	-	-	-	8.4	10.6	11.8	14.1	-	-	-	-	288.7	-	-	-						
295.3	-	-	-	-	-	-	-	-	8.8	9.9	12.1	-	-	-	-	295.3	-	-	-						
298.6	-	-	-	-	-	-	-	-	7.9	9.0	11.2	-	-	-	-	298.6	-	-	-						
301.8	-	-	-	-	-	-	-	-	-	8.2	10.4	-	-	-	-	301.8	-	-	-						
308.4	-	-	-	-	-	-	-	-	-	-	8.6	-	-	-	-	308.4	-	-	-						
311.7	-	-	-	-	-	-	-	-	-	-	7.7	-	-	-	-	311.7	-	-	-						

99,200 lb 187,400 lb 275,600 lb 363,800 lb 408,000 lb 452,000 lb

0 lb 66,100 lb 110,200 lb



LH+LF

SUPERLIFT 3800

+ 39.4-118.1 ft 27.6 ft 32.2 ft/s 360° ISO											
354.3 ft LH+LF_1 LH+LF_3 LH+LF_1 LH+LF_3 LH+LF_1 364.2 ft LH+LF_3 374.0 ft LH+LF_1											
39.4 ft 15° 20° 30° 15° 20° 15° 20° 30° 15° 20° 15° 20° 30°											
1,000 lb											
ft											ft
49.2	212.7	-	-	231.5	-	-	-	-	-	-	49.2
52.5	210.5	194.0	-	229.3	222.7	-	-	-	219.4	-	52.5
55.8	207.8	191.3	-	227.1	221.0	-	-	-	216.6	212.7	55.8
59.1	205.0	188.5	157.6	224.9	219.4	-	-	-	213.8	210.5	59.1
62.3	202.3	186.3	156.0	219.9	217.2	129.0	-	-	211.1	208.9	62.3
65.6	199.5	184.1	154.3	215.0	215.0	126.8	-	-	208.3	207.2	65.6
68.9	196.8	181.3	152.1	203.9	205.6	124.6	109.1	-	199.0	199.5	68.9
72.2	194.0	178.6	149.9	192.9	196.2	122.4	107.6	-	189.6	191.8	72.2
78.7	175.3	173.1	145.5	175.3	177.5	119.0	104.5	-	170.9	173.1	78.7
82.0	167.0	167.0	143.9	167.0	169.2	117.4	103.1	78.5	163.1	165.3	82.0
85.3	158.7	160.9	142.2	158.7	160.9	115.7	101.6	77.6	155.4	157.6	85.3
91.9	145.5	147.7	137.8	145.5	146.6	111.3	98.8	75.8	141.1	143.3	91.9
98.4	132.3	134.5	134.5	132.3	134.5	108.5	95.9	74.1	129.0	131.2	98.4
111.5	111.3	113.5	116.8	111.3	113.5	101.6	90.6	71.0	108.9	110.2	111.5
124.7	95.0	96.3	99.2	94.6	96.1	95.2	85.3	68.3	91.7	93.3	124.7
137.8	80.7	82.0	84.4	80.5	81.8	84.4	80.7	65.7	77.6	78.9	137.8
150.9	67.0	68.3	70.5	66.8	68.1	72.3	74.5	63.3	64.8	66.1	150.9
164.0	54.5	55.8	57.8	54.2	55.3	61.9	64.2	61.1	52.5	53.6	164.0
177.2	44.1	45.2	47.0	43.9	45.0	52.7	54.7	58.4	41.9	43.0	177.2
190.3	35.3	36.2	37.9	35.1	35.9	43.7	45.4	48.7	33.1	34.0	190.3
203.4	27.8	28.7	30.0	27.3	28.2	35.7	37.3	40.3	25.4	26.2	203.4
216.5	21.2	21.8	23.1	20.9	21.6	28.7	30.2	33.1	18.7	19.6	216.5
229.7	15.4	16.1	17.2	15.2	15.9	22.7	24.0	26.7	13.0	13.7	229.7
236.2	12.9	13.6	14.6	12.7	13.2	20.1	21.4	23.7	10.5	11.1	236.2
239.5	11.6	12.3	13.2	11.4	11.9	18.7	20.1	22.3	9.2	9.9	239.5
242.8	10.4	11.0	11.9	10.1	10.6	17.4	18.7	20.9	7.9	8.6	242.8
249.3	8.2	8.6	9.6	7.7	8.4	14.9	16.2	18.4	-	-	249.3
252.6	-	-	8.4	-	-	13.7	15.0	17.1	-	-	252.6
255.9	-	-	-	-	-	12.6	13.9	15.9	-	-	255.9
269.0	-	-	-	-	-	8.4	9.5	11.2	-	-	269.0
272.3	-	-	-	-	-	-	8.4	10.2	-	-	272.3
278.9	-	-	-	-	-	-	-	8.2	-	-	278.9

99,200 lb

187,400 lb

275,600 lb

363,800 lb

408,000 lb

452,000 lb

0 lb



66,100 lb

110,200 lb



SSL+LF_1

SUPERLIFT 3800

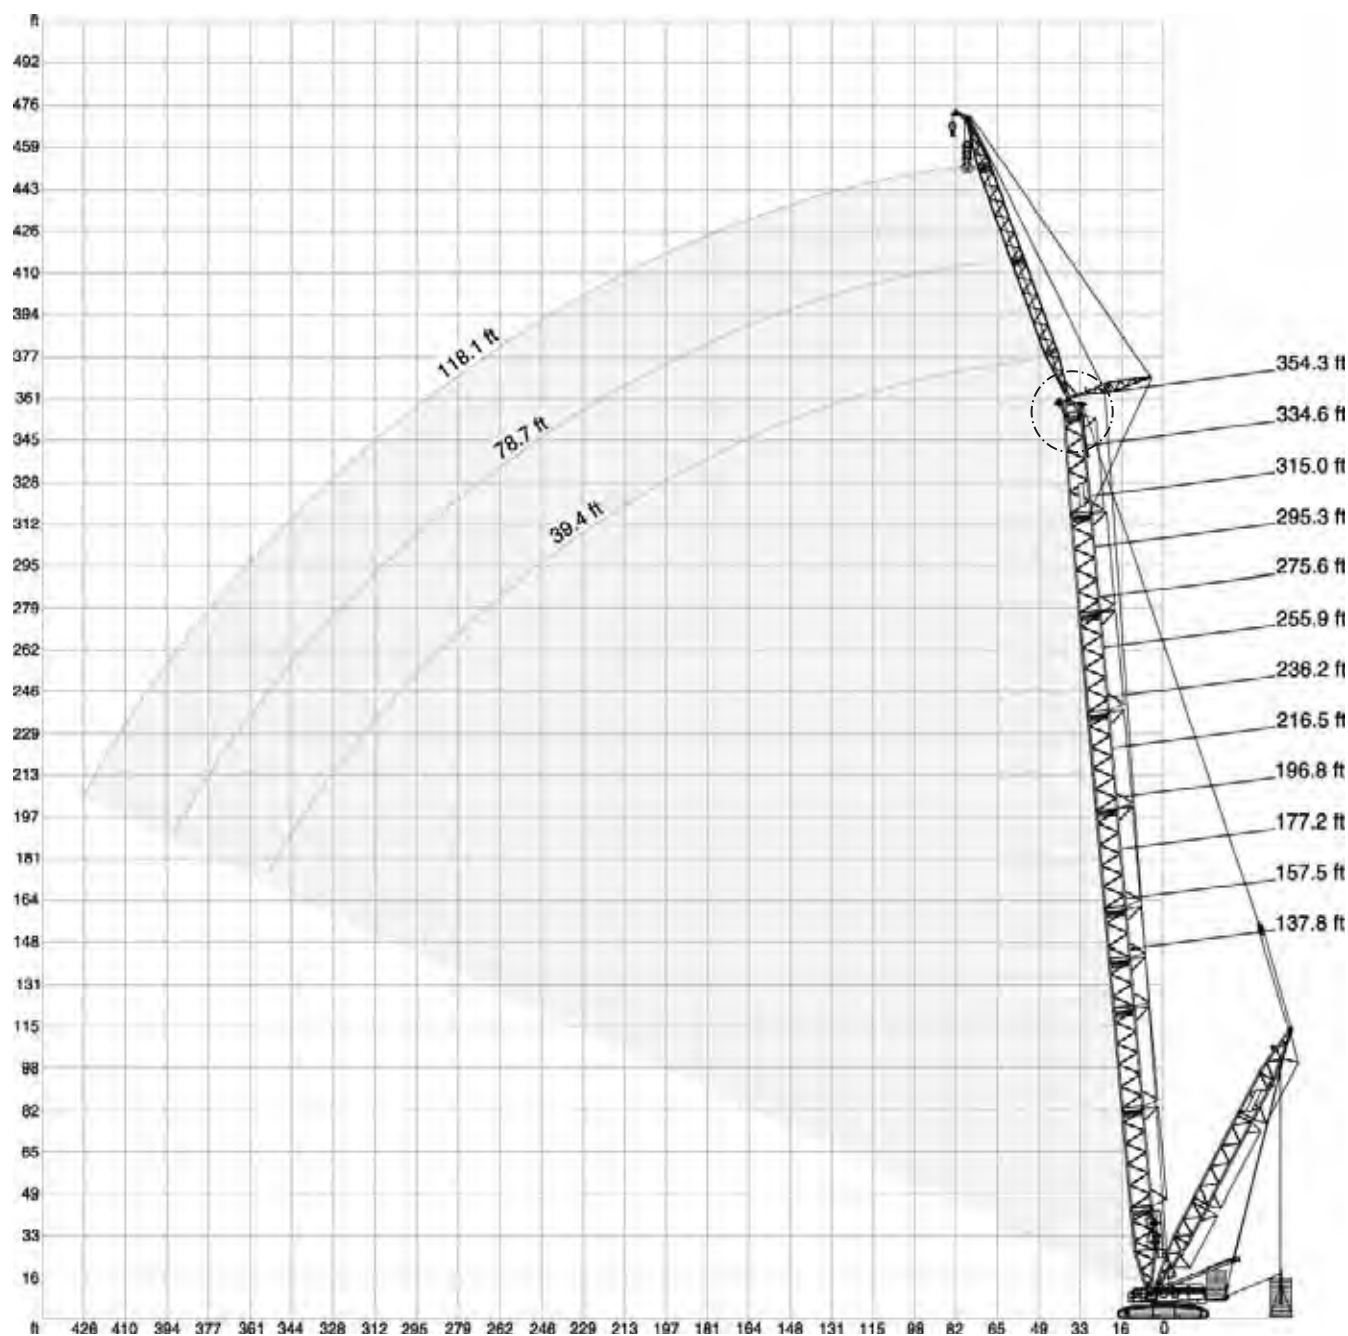

* Attachable



SSL+LF

SUPERLIFT 3800

363,800 lb + 110,200 lb				27.6 ft				32.2 ft/s				360°		75%				
	137.8 ft																	
	SSL+LF_1																	
	39.4 ft				78.7 ft				118.1 ft									
	0 lb- 0 t	716.6klb	0 t	716.6klb	0 t	716.6klb	0 t	716.6klb	0 t	716.6klb	0 t	716.6klb	0 t	716.6klb	0 t	716.6klb		
	15°		20°		30°		15°		20°		30°		15°		20°		30°	
	1,000 lb																	
ft																		
36.1	357.1	357.1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
39.4	339.5	339.5	264.6	264.6	-	-	-	-	-	-	-	-	-	-	-	-	-	
42.7	324.1	324.1	254.6	254.6	168.7	168.7	-	-	-	-	-	-	-	-	-	-	-	
45.9	308.6	308.6	244.7	244.7	164.2	164.2	-	-	-	-	-	-	-	-	-	-	-	
49.2	295.4	295.4	235.9	235.9	159.8	159.8	174.2	174.2	-	-	-	-	-	-	-	-	-	
52.5	282.2	282.2	227.1	227.1	155.4	155.4	166.4	166.4	-	-	-	-	-	-	-	-	-	
55.8	272.3	272.3	219.9	219.9	151.6	151.6	159.8	159.8	127.9	127.9	-	-	-	-	-	-	-	
59.1	262.4	262.4	212.7	212.7	147.7	147.7	153.2	153.2	123.5	123.5	-	-	-	-	-	-	-	
62.3	252.4	252.4	206.7	206.7	144.4	144.4	147.7	147.7	119.6	119.6	-	-	110.2	111.3	-	-	-	
65.6	242.5	242.5	200.6	200.6	141.1	141.1	142.2	142.2	115.7	115.7	79.1	79.1	106.7	107.1	-	-	-	
72.2	227.1	227.1	189.6	189.6	135.6	135.6	132.3	132.3	108.7	108.7	75.2	75.2	99.4	99.6	81.6	81.6	-	
78.7	213.8	213.8	179.7	179.7	130.1	130.1	123.5	123.5	102.5	102.5	71.7	71.7	93.0	93.5	76.5	76.5	-	
85.3	201.7	201.7	170.9	170.9	124.6	124.6	116.8	116.8	97.0	97.0	68.6	68.6	87.3	87.7	72.1	72.1	-	
88.6	196.2	196.2	166.4	166.4	122.4	122.4	113.4	113.4	94.6	94.6	67.1	67.1	84.8	85.1	70.1	70.1	48.1	
91.9	190.7	190.7	162.0	162.0	120.2	120.2	110.0	110.0	92.2	92.2	65.7	65.7	82.2	82.5	68.1	68.1	47.0	
98.4	173.1	181.9	155.4	155.4	116.8	116.8	104.1	104.1	87.7	87.7	63.1	63.1	77.4	77.6	64.6	64.6	44.8	
111.5	146.6	165.7	140.7	143.7	110.4	110.4	94.4	94.4	80.4	80.4	58.8	58.8	69.6	69.7	58.6	58.6	41.2	
124.7	124.4	152.1	124.6	133.7	104.9	104.9	85.9	85.9	73.9	73.9	55.0	55.0	62.9	62.9	53.3	53.3	38.1	
137.8	106.5	141.1	106.9	125.7	100.5	100.5	78.7	78.7	68.3	68.3	51.6	51.6	57.3	57.3	48.7	48.7	35.3	
144.4	100.0	137.1	100.4	122.7	94.6	98.8	75.9	75.9	66.2	66.2	50.3	50.3	55.0	55.0	47.0	47.0	34.1	
150.9	93.5	133.0	93.8	119.8	-	-	73.1	73.1	64.1	64.1	49.1	49.1	52.8	52.8	45.2	45.2	32.9	
157.5	87.1	129.0	87.3	116.8	-	-	70.3	70.3	61.9	61.9	47.8	47.8	50.5	50.5	43.4	43.4	31.7	
164.0	81.8	125.7	-	-	-	-	68.2	68.2	60.3	60.3	46.9	46.9	48.7	48.7	42.0	42.0	30.9	
177.2	-	-	-	-	-	-	63.9	63.9	56.9	56.9	45.0	45.0	45.2	45.2	39.2	39.2	29.1	
180.4	-	-	-	-	-	-	63.1	63.1	56.3	56.3	44.8	44.8	44.5	44.5	38.7	38.7	28.8	
190.3	-	-	-	-	-	-	60.7	60.7	54.5	54.5	-	-	42.3	42.3	36.9	36.9	27.8	
196.9	-	-	-	-	-	-	59.1	59.1	53.4	53.4	-	-	40.8	40.8	35.7	35.7	27.1	
203.4	-	-	-	-	-	-	58.0	58.0	-	-	-	-	39.7	39.7	34.8	34.8	26.6	
216.5	-	-	-	-	-	-	-	-	-	-	-	-	37.5	37.5	33.1	33.1	25.6	
219.8	-	-	-	-	-	-	-	-	-	-	-	-	37.0	37.0	32.7	32.7	25.4	
229.7	-	-	-	-	-	-	-	-	-	-	-	-	35.7	35.7	31.7	31.7	-	
236.2	-	-	-	-	-	-	-	-	-	-	-	-	34.8	34.8	31.1	31.1	-	
239.5	-	-	-	-	-	-	-	-	-	-	-	-	34.4	34.4	-	-	-	

	0 lb	143,300 lb	275,600 lb	363,800 lb	452,000 lb	540,200 lb	628,400 lb	716,600 lb
--	------	------------	------------	------------	------------	------------	------------	------------



SSL+LF

SUPERLIFT 3800

363,800 lb + 110,200 lb				27.6 ft				32.2 ft/s				360°		75%						
	157.5 ft																			
	SSL+LF_1																			
	39.4 ft						78.7 ft						118.1 ft							
	0 lb- 0 t		716.6klb		0 t		716.6klb		0 t		716.6klb		0 t		716.6klb		0 t		716.6klb	
	15°		20°		30°		15°		20°		30°		15°		20°		30°			
	1,000 lb																			
ft																				
36.1	368.2	368.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
39.4	350.5	350.5	269.0	269.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
45.9	319.7	319.7	251.3	251.3	166.4	166.4	-	-	-	-	-	-	-	-	-	-	-	-	-	
49.2	307.5	307.5	242.5	242.5	162.6	162.6	178.6	178.6	-	-	-	-	-	-	-	-	-	-	-	
52.5	295.4	295.4	233.7	233.7	158.7	158.7	172.0	172.0	-	-	-	-	-	-	-	-	-	-	-	
55.8	284.4	284.4	227.1	227.1	154.9	154.9	165.3	165.3	130.1	130.1	-	-	-	-	-	-	-	-	-	
59.1	273.4	273.4	220.5	220.5	151.0	151.0	158.7	158.7	125.7	125.7	-	-	-	-	-	-	-	-	-	
62.3	264.6	264.6	214.4	214.4	147.7	147.7	153.2	153.2	121.8	121.8	-	-	112.4	112.4	-	-	-	-	-	
65.6	255.7	255.7	208.3	208.3	144.4	144.4	147.7	147.7	117.9	117.9	-	-	108.5	108.9	-	-	-	-	-	
68.9	248.0	248.0	202.8	202.8	141.6	141.6	142.7	142.7	114.6	114.6	78.0	78.0	104.8	105.3	-	-	-	-	-	
72.2	240.3	240.3	197.3	197.3	138.9	138.9	137.8	137.8	111.3	111.3	76.3	76.3	101.2	101.6	82.2	82.7	-	-	-	
78.7	224.9	224.9	187.4	187.4	133.4	133.4	129.0	129.0	105.8	105.8	73.0	73.0	95.0	95.5	77.6	78.0	-	-	-	
85.3	209.4	213.8	178.6	178.6	129.0	129.0	121.3	121.3	100.3	100.3	69.9	69.9	89.7	89.9	73.6	73.6	-	-	-	
91.9	188.5	202.8	170.9	170.9	124.6	124.6	114.6	114.6	95.5	95.5	67.2	67.2	84.7	84.9	69.9	69.9	47.4	47.4	-	
98.4	169.8	192.9	163.1	163.1	120.2	120.2	109.3	109.3	91.1	91.1	64.6	64.6	80.0	80.2	66.4	66.4	45.4	45.4	-	
111.5	143.3	176.7	141.8	151.4	113.5	113.5	99.5	99.5	83.7	83.7	60.3	60.3	72.2	72.3	60.5	60.5	41.9	41.9	-	
124.7	121.2	162.8	122.1	141.1	108.0	108.0	90.8	90.8	77.2	77.2	56.5	56.5	65.5	65.6	55.3	55.3	38.8	38.8	-	
137.8	103.4	151.0	104.1	132.3	103.6	103.6	83.3	83.3	71.7	71.7	53.1	53.1	59.7	60.0	50.7	50.7	36.2	36.2	-	
150.9	90.3	141.5	90.8	125.7	91.1	100.2	77.5	77.5	67.1	67.1	50.6	50.6	55.3	55.4	47.2	47.2	34.0	34.0	-	
157.5	83.8	136.7	84.2	122.4	84.9	98.5	74.5	74.5	64.8	64.8	49.4	49.4	53.1	53.1	45.4	45.4	32.8	32.8	-	
164.0	78.9	133.4	79.1	119.7	-	-	72.2	72.2	63.1	63.1	48.4	48.4	51.3	51.3	43.9	43.9	31.9	31.9	-	
173.9	71.5	128.4	71.4	115.7	-	-	68.8	68.8	60.6	60.6	46.8	46.8	48.5	48.5	41.7	41.7	30.5	30.5	-	
177.2	69.0	126.8	-	-	-	-	67.7	67.7	59.7	59.7	46.3	46.3	47.6	47.6	41.0	41.0	30.0	30.0	-	
180.4	67.0	125.7	-	-	-	-	66.7	66.8	59.1	59.1	45.9	45.9	46.9	46.9	40.4	40.4	29.7	29.7	-	
190.3	-	-	-	-	-	-	63.9	64.2	57.1	57.1	44.9	44.9	44.7	44.7	38.7	38.7	28.7	28.7	-	
193.6	-	-	-	-	-	-	62.9	63.3	56.4	56.4	44.5	44.5	43.9	43.9	38.1	38.1	28.3	28.3	-	
203.4	-	-	-	-	-	-	58.7	61.1	54.7	54.7	-	-	42.0	42.0	36.5	36.5	27.4	27.4	-	
213.3	-	-	-	-	-	-	53.9	59.1	53.1	53.1	-	-	40.1	40.1	35.1	35.1	26.5	26.5	-	
216.5	-	-	-	-	-	-	52.2	58.4	-	-	-	-	39.5	39.5	34.6	34.6	26.2	26.2	-	
219.8	-	-	-	-	-	-	50.7	58.0	-	-	-	-	39.0	39.0	34.2	34.2	26.0	26.0	-	
229.7	-	-	-	-	-	-	-	-	-	-	-	-	37.6	37.6	33.1	33.1	25.4	25.4	-	
232.9	-	-	-	-	-	-	-	-	-	-	-	-	37.1	37.1	32.8	32.8	25.1	25.1	-	
242.8	-	-	-	-	-	-	-	-	-	-	-	-	35.9	35.9	31.9	31.9	-	-	-	
249.3	-	-	-	-	-	-	-	-	-	-	-	-	35.1	35.1	31.3	31.3	-	-	-	
255.9	-	-	-	-	-	-	-	-	-	-	-	-	34.4	34.4	-	-	-	-	-	



0 lb

143,300 lb

275,600 lb

363,800 lb

452,000 lb

540,200 lb

628,400 lb

716,600 lb



TEREX®



SSL+LF

SUPERLIFT 3800

363,800 lb + 110,200 lb				27.6 ft				32.2 ft/s				360°		75%						
   	177.2 ft																			
	SSL+LF_1																			
	39.4 ft								78.7 ft						118.1 ft					
	0 lb- 0 t		716.6klb		0 lb- 0 t		716.6klb		0 lb- 0 t		716.6klb		0 lb- 0 t		716.6klb		0 lb- 0 t		716.6klb	
	15°		20°		30°		15°		20°		30°		15°		20°		30°			
1,000 lb																				
39.4	359.4	359.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
42.7	345.0	345.0	264.6	264.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
45.9	330.7	330.7	257.9	257.9	168.7	168.7	-	-	-	-	-	-	-	-	-	-	-	-		
52.5	306.4	306.4	240.3	240.3	160.9	160.9	175.3	175.3	-	-	-	-	-	-	-	-	-	-		
59.1	286.6	286.6	227.1	227.1	154.3	154.3	163.1	163.1	127.9	127.9	-	-	-	-	-	-	-	-		
65.6	266.8	266.8	216.1	216.1	147.7	147.7	152.1	152.1	120.2	120.2	-	-	109.6	110.2	-	-	-	-		
68.9	259.0	259.0	210.5	210.5	145.0	145.0	147.2	147.2	116.8	116.8	78.7	78.7	106.2	106.7	-	-	-	-		
72.2	251.3	251.3	205.0	205.0	142.2	142.2	142.2	142.2	113.5	113.5	76.9	76.9	102.7	103.2	-	-	-	-		
75.5	241.4	244.7	200.1	200.1	139.4	139.4	137.8	137.8	111.1	111.1	75.4	75.4	99.8	100.2	80.7	80.9	-	-		
78.7	231.5	238.1	195.1	195.1	136.7	136.7	133.4	133.4	108.7	108.7	73.9	73.9	96.8	97.2	78.5	78.7	-	-		
85.3	207.2	224.9	186.3	186.3	132.3	132.3	126.8	126.8	103.4	103.4	71.0	71.0	91.5	91.9	74.5	74.7	-	-		
91.9	185.2	213.8	178.6	178.6	127.9	127.9	120.2	120.2	98.5	98.5	68.3	68.3	86.6	87.1	71.0	71.2	47.6	47.8		
98.4	167.6	203.9	168.7	170.9	124.6	124.6	113.5	113.5	94.1	94.1	65.9	65.9	82.2	82.7	67.9	67.9	45.9	45.9		
111.5	141.1	187.0	142.2	159.1	117.9	117.9	103.8	103.8	86.8	86.8	61.8	61.8	74.6	74.9	62.2	62.2	42.5	42.5		
124.7	118.8	172.3	119.8	148.4	110.6	112.1	95.2	95.2	80.2	80.2	58.1	58.1	67.8	68.0	57.0	57.0	39.5	39.5		
137.8	100.8	159.8	101.4	138.9	102.5	106.9	87.5	87.5	74.5	74.5	54.7	54.7	61.9	62.2	52.5	52.5	36.8	36.8		
150.9	87.5	150.3	88.2	131.5	89.0	103.1	81.6	81.6	70.1	70.1	52.0	52.0	57.8	57.9	48.9	48.9	34.6	34.6		
164.0	76.0	141.8	76.6	125.3	76.9	99.9	76.3	76.3	66.1	66.1	49.7	49.7	53.9	53.9	45.7	45.7	32.6	32.6		
170.6	71.1	138.2	71.6	122.7	71.7	98.5	73.9	73.9	64.2	64.2	48.6	48.6	52.0	52.0	44.2	44.2	31.7	31.7		
177.2	66.1	134.5	66.6	120.2	-	-	71.4	71.4	62.4	62.4	47.6	47.6	50.0	50.0	42.8	42.8	30.9	30.9		
190.3	57.9	128.6	58.0	115.7	-	-	63.5	67.6	59.5	59.5	46.0	46.0	47.0	47.0	40.3	40.3	29.4	29.4		
196.9	53.8	125.7	-	-	-	-	59.5	65.7	58.0	58.0	45.2	45.2	45.4	45.4	39.0	39.0	28.7	28.7		
203.4	-	-	-	-	-	-	56.1	64.2	55.3	56.9	44.6	44.6	44.2	44.2	38.1	38.1	28.1	28.1		
210.0	-	-	-	-	-	-	52.6	62.8	52.5	55.8	44.1	44.1	42.9	42.9	37.1	37.1	27.5	27.5		
216.5	-	-	-	-	-	-	49.2	61.3	49.8	54.7	-	-	41.7	41.7	36.2	36.2	26.9	26.9		
229.7	-	-	-	-	-	-	43.6	58.9	43.9	53.1	-	-	39.5	39.5	34.5	34.5	26.0	26.0		
236.2	-	-	-	-	-	-	40.8	57.8	-	-	-	-	38.4	38.4	33.7	33.7	25.6	25.6		
242.8	-	-	-	-	-	-	-	-	-	-	-	-	37.6	37.6	33.1	33.1	25.3	25.3		
246.1	-	-	-	-	-	-	-	-	-	-	-	-	37.1	37.1	32.7	32.7	25.1	25.1		
255.9	-	-	-	-	-	-	-	-	-	-	-	-	35.9	35.9	31.7	31.7	-	-		
265.7	-	-	-	-	-	-	-	-	-	-	-	-	33.4	34.9	31.1	31.1	-	-		
269.0	-	-	-	-	-	-	-	-	-	-	-	-	32.6	34.6	-	-	-	-		
275.6	-	-	-	-	-	-	-	-	-	-	-	-	30.9	34.0	-	-	-	-		



0 lb

143,300 lb

275,600 lb

363,800 lb

452,000 lb

540,200 lb

628,400 lb

716,600 lb



SSL+LF

SUPERLIFT 3800

363,800 lb + 110,200 lb										27.6 ft				32.2 ft/s				360°		75%	
   	196.9 ft																				
	SSL+LF_1																				
	39.4 ft						78.7 ft						118.1 ft								
	0 lb- 0 t		716.6klb		0 lb- 0 t		716.6klb		0 lb- 0 t		716.6klb		0 lb- 0 t		716.6klb		0 lb- 0 t		716.6klb		
	15°		20°		30°		15°		20°		30°		15°		20°		30°				
ft	1,000 lb																				
39.4	368.2	368.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
42.7	354.9	354.9	271.2	271.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
45.9	341.7	341.7	262.4	262.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
49.2	329.6	329.6	254.6	254.6	166.4	166.4	-	-	-	-	-	-	-	-	-	-	-	-			
52.5	317.5	317.5	246.9	246.9	162.0	162.0	178.6	178.6	-	-	-	-	-	-	-	-	-	-			
59.1	295.4	295.4	233.7	233.7	156.5	156.5	166.4	166.4	130.1	130.1	-	-	-	-	-	-	-	-			
65.6	277.8	277.8	220.5	220.5	149.9	149.9	155.4	155.4	122.4	122.4	-	-	110.2	111.3	-	-	-	-			
72.2	249.1	262.4	211.6	211.6	144.4	144.4	146.6	146.6	116.8	116.8	77.6	77.6	104.1	104.7	-	-	-	-			
75.5	237.0	254.6	206.7	206.7	142.2	142.2	142.2	142.2	113.5	113.5	76.1	76.1	101.2	101.7	81.4	81.6	-	-			
78.7	224.9	246.9	201.7	201.7	140.0	140.0	137.8	137.8	110.2	110.2	74.5	74.5	98.3	98.8	79.1	79.6	-	-			
85.3	203.9	235.9	192.9	192.9	135.6	135.6	131.2	131.2	105.8	105.8	71.9	71.9	93.0	93.7	75.4	75.6	-	-			
91.9	183.0	222.7	184.1	185.2	131.2	131.2	124.6	124.6	101.2	101.2	69.4	69.4	88.6	89.1	72.1	72.3	-	-			
95.1	173.6	218.3	175.3	181.3	129.0	129.0	121.3	121.3	99.1	99.1	68.2	68.2	86.4	86.9	70.5	70.8	47.0	47.0			
98.4	164.2	213.8	166.4	177.5	126.8	126.8	117.9	117.9	97.0	97.0	67.0	67.0	84.2	84.7	69.0	69.2	46.1	46.1			
111.5	137.8	196.9	139.3	165.7	120.2	120.2	108.2	108.2	89.7	89.7	62.9	62.9	76.7	77.0	63.4	63.6	43.0	43.0			
124.7	115.5	181.9	116.5	155.1	111.0	114.6	99.5	99.5	83.1	83.1	59.2	59.2	70.0	70.2	58.4	58.6	40.1	40.1			
137.8	97.4	168.7	98.1	145.5	99.4	110.0	91.7	91.7	77.4	77.4	56.0	56.0	63.9	64.2	54.0	54.2	37.5	37.5			
150.9	84.2	158.4	84.9	137.4	85.9	105.9	85.5	85.5	72.8	72.8	53.4	53.4	59.7	59.9	50.5	50.6	35.4	35.4			
164.0	72.4	149.2	73.0	130.4	73.9	102.4	77.7	80.0	68.6	68.6	51.0	51.0	55.8	55.9	47.3	47.3	33.5	33.5			
177.2	61.9	141.1	62.4	124.6	63.3	99.4	68.3	75.0	64.8	64.8	48.9	48.9	52.2	52.2	44.3	44.3	31.7	31.7			
183.7	57.8	137.8	58.3	122.4	58.6	98.1	64.2	73.0	62.1	63.3	48.1	48.1	50.7	50.7	43.1	43.1	31.0	31.0			
190.3	53.7	134.5	54.2	120.2	-	-	60.0	71.0	59.4	61.9	47.2	47.2	49.2	49.2	41.8	41.8	30.3	30.3			
203.4	46.4	129.0	46.5	116.5	-	-	52.3	67.4	53.1	59.2	45.7	45.7	46.3	46.3	39.5	39.5	29.0	29.0			
206.7	44.8	127.9	44.8	115.7	-	-	50.6	66.6	51.4	58.5	45.4	45.4	45.6	45.6	39.0	39.0	28.7	28.7			
216.5	39.9	124.6	-	-	-	-	45.4	64.2	46.1	56.7	44.5	44.5	43.7	43.7	37.5	37.5	27.8	27.8			
223.1	-	-	-	-	-	-	42.6	62.8	43.2	55.7	43.9	43.9	42.5	42.5	36.7	36.7	27.3	27.3			
229.7	-	-	-	-	-	-	39.8	61.5	40.3	54.7	-	-	41.4	41.4	35.9	35.9	26.7	26.7			
242.8	-	-	-	-	-	-	34.7	59.2	35.0	53.2	-	-	38.1	39.5	34.4	34.4	25.9	25.9			
246.1	-	-	-	-	-	-	33.5	58.7	33.7	52.9	-	-	37.0	39.0	34.1	34.1	25.7	25.7			
252.6	-	-	-	-	-	-	31.1	57.8	-	-	-	-	34.8	38.1	33.4	33.4	25.3	25.3			
255.9	-	-	-	-	-	-	-	-	-	-	-	-	33.7	37.7	33.1	33.1	25.1	25.1			
262.5	-	-	-	-	-	-	-	-	-	-	-	-	31.6	37.0	31.4	32.5	24.9	24.9			
269.0	-	-	-	-	-	-	-	-	-	-	-	-	29.5	36.2	29.7	31.9	-	-			
282.2	-	-	-	-	-	-	-	-	-	-	-	-	25.6	34.9	26.0	30.9	-	-			
292.0	-	-	-	-	-	-	-	-	-	-	-	-	22.9	34.0	-	-	-	-			

	0 lb	143,300 lb	275,600 lb	363,800 lb	452,000 lb	540,200 lb	628,400 lb	716,600 lb
--	------	------------	------------	------------	------------	------------	------------	------------



SSL+LF

SUPERLIFT 3800



363,800 lb + 110,200 lb										27.6 ft		32.2 ft/s		360°		75%		
	216.5 ft																	
	SSL+LF_1																	
	39.4 ft						78.7 ft						118.1 ft					
	0 lb- 0 t 716.6klb		0 lb- 0 t 716.6klb		0 lb- 0 t 716.6klb		0 lb- 0 t 716.6klb		0 lb- 0 t 716.6klb		0 lb- 0 t 716.6klb		0 lb- 0 t 716.6klb		0 lb- 0 t 716.6klb			
	15°		20°		30°		15°		20°		30°		15°		20°		30°	
	1,000 lb																	
ft																		
42.7	361.6	361.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
45.9	348.3	348.3	266.8	266.8	-	-	-	-	-	-	-	-	-	-	-	-	-	
52.5	326.3	326.3	251.3	251.3	164.2	164.2	-	-	-	-	-	-	-	-	-	-	-	
55.8	313.1	316.4	244.7	244.7	160.9	160.9	175.3	175.3	-	-	-	-	-	-	-	-	-	
59.1	299.8	306.4	238.1	238.1	157.6	157.6	169.8	169.8	-	-	-	-	-	-	-	-	-	
62.3	283.3	296.5	232.6	232.6	154.9	154.9	164.8	164.8	127.9	127.9	-	-	-	-	-	-	-	
65.6	266.8	286.6	227.1	227.1	152.1	152.1	159.8	159.8	124.6	124.6	-	-	-	-	-	-	-	
68.9	253.5	278.9	222.1	222.1	149.9	149.9	154.9	154.9	121.3	121.3	-	-	108.2	108.7	-	-	-	
72.2	240.3	271.2	217.2	217.2	147.7	147.7	149.9	149.9	117.9	117.9	-	-	105.2	105.6	-	-	-	
75.5	229.3	264.6	212.2	212.2	145.0	145.0	146.1	146.1	115.2	115.2	76.7	76.7	102.3	102.7	-	-	-	
78.7	218.3	257.9	207.2	207.2	142.2	142.2	142.2	142.2	112.4	112.4	75.2	75.2	99.4	99.9	79.6	80.0	-	
85.3	198.4	244.7	199.5	199.5	137.8	137.8	134.5	134.5	108.2	108.2	72.8	72.8	94.4	94.8	76.1	76.3	-	
91.9	180.8	233.7	183.0	190.7	133.4	133.4	127.9	127.9	103.6	103.6	70.3	70.3	89.9	90.4	72.8	73.0	-	
98.4	163.1	222.7	164.2	184.1	130.1	130.1	122.4	122.4	99.4	99.4	67.9	67.9	85.8	86.2	69.7	69.9	46.1	
111.5	136.0	205.8	137.1	171.6	123.5	123.5	112.4	112.4	92.2	92.2	63.9	63.9	78.6	78.9	64.5	64.6	43.1	
124.7	113.4	190.7	114.4	160.6	112.7	117.6	103.4	103.4	85.8	85.8	60.4	60.4	71.9	72.2	59.7	59.8	40.5	
137.8	95.5	177.5	96.3	151.0	97.9	112.4	95.5	95.5	80.0	80.0	57.3	57.3	65.9	66.1	55.3	55.6	38.1	
150.9	82.2	166.4	83.0	142.9	84.2	108.5	86.5	89.1	75.3	75.3	54.7	54.7	61.4	61.7	51.8	52.0	36.1	
164.0	70.3	156.5	70.9	136.0	71.9	104.9	76.9	83.5	71.1	71.1	52.2	52.2	57.5	57.8	48.6	48.8	34.2	
177.2	59.5	147.7	60.2	130.1	61.1	101.6	66.6	78.5	67.2	67.2	50.0	50.0	54.2	54.5	45.9	45.9	32.4	
190.3	51.3	141.1	51.8	124.9	52.5	99.1	57.9	74.2	58.9	64.2	48.3	48.3	51.1	51.2	43.4	43.4	30.9	
200.1	45.5	136.5	46.0	121.4	46.5	97.4	51.8	71.2	52.9	61.9	47.1	47.1	48.9	48.9	41.6	41.6	29.9	
203.4	43.9	135.2	44.3	120.5	-	-	50.1	70.4	51.1	61.3	46.7	46.7	48.3	48.3	41.1	41.1	29.6	
216.5	37.3	130.1	37.7	116.8	-	-	43.2	67.0	44.1	58.6	45.4	45.4	45.6	45.6	39.0	39.0	28.4	
223.1	34.6	127.9	34.8	114.6	-	-	40.3	65.6	41.2	57.6	42.4	44.9	43.4	44.5	38.1	38.1	27.9	
229.7	32.0	125.7	-	-	-	-	37.5	64.2	38.2	56.6	39.4	44.4	41.1	43.3	37.3	37.3	27.4	
232.9	30.6	124.6	-	-	-	-	36.0	63.5	36.7	56.1	37.9	44.1	39.9	42.7	36.8	36.8	27.2	
236.2	-	-	-	-	-	-	34.6	62.8	35.3	55.6	36.4	43.9	38.8	42.1	36.4	36.4	26.9	
242.8	-	-	-	-	-	-	32.3	61.7	32.8	54.8	-	-	36.4	41.2	35.1	35.6	26.5	
255.9	-	-	-	-	-	-	27.6	59.5	28.0	53.4	-	-	31.5	39.2	32.4	34.2	25.6	
262.5	-	-	-	-	-	-	25.6	58.6	26.0	52.7	-	-	29.4	38.4	30.3	33.6	25.3	
269.0	-	-	-	-	-	-	23.6	57.8	-	-	-	-	27.3	37.6	28.1	33.0	25.0	
275.6	-	-	-	-	-	-	-	-	-	-	-	-	25.1	36.8	26.0	32.4	24.7	
282.2	-	-	-	-	-	-	-	-	-	-	-	-	23.4	36.2	24.2	32.0	-	
295.3	-	-	-	-	-	-	-	-	-	-	-	-	19.8	34.8	20.5	31.1	-	
298.6	-	-	-	-	-	-	-	-	-	-	-	-	19.1	34.6	19.6	30.9	-	
308.4	-	-	-	-	-	-	-	-	-	-	-	-	16.8	34.0	-	-	-	

	0 lb	143,300 lb	275,600 lb	363,800 lb	452,000 lb	540,200 lb	628,400 lb	716,600 lb
--	------	------------	------------	------------	------------	------------	------------	------------



SSL+LF

SUPERLIFT 3800

363,800 lb + 110,200 lb					27.6 ft		32.2 ft/s		360°		75%	
	236.2 ft											
	SSL+LF_1											
	39.4 ft				78.7 ft				118.1 ft			
	0 lb- 0 t		0 lb- 716.6klb		0 lb- 716.6klb		0 lb- 716.6klb		0 lb- 716.6klb		0 lb- 716.6klb	
	15°		20°		30°		15°		20°		30°	
	1,000 lb											
ft												
42.7	368.2	368.2	-	-	-	-	-	-	-	-	-	-
45.9	357.1	357.1	269.0	269.0	-	-	-	-	-	-	-	-
52.5	326.3	332.9	255.7	255.7	165.3	165.3	-	-	-	-	-	-
55.8	307.5	323.0	249.1	249.1	162.6	162.6	178.6	178.6	-	-	-	-
59.1	288.8	313.1	242.5	242.5	159.8	159.8	173.1	173.1	-	-	-	-
62.3	273.4	304.2	237.0	237.0	157.1	157.1	168.1	168.1	129.0	129.0	-	-
65.6	257.9	295.4	231.5	231.5	154.3	154.3	163.1	163.1	125.7	125.7	-	-
68.9	244.7	287.7	227.1	227.1	151.6	151.6	158.7	158.7	122.9	122.9	-	-
72.2	231.5	280.0	222.7	222.7	148.8	148.8	154.3	154.3	120.2	120.2	-	-
75.5	220.5	273.4	217.2	217.7	146.6	146.6	149.9	149.9	117.4	117.4	77.2	77.2
78.7	209.4	266.8	211.6	212.7	144.4	144.4	145.5	145.5	114.6	114.6	75.8	75.8
85.3	190.7	253.5	192.9	205.0	140.0	140.0	138.9	138.9	110.2	110.2	73.4	73.4
91.9	174.2	242.5	175.3	196.2	136.7	136.7	132.3	132.3	105.8	105.8	71.0	71.0
98.4	158.7	231.5	160.9	189.6	132.3	132.3	125.7	125.7	101.6	101.6	68.8	68.8
111.5	132.3	213.8	133.7	177.1	125.7	125.7	115.4	115.4	94.6	94.6	65.0	65.0
124.7	110.1	198.4	111.1	166.1	113.2	119.8	106.6	106.6	88.2	88.2	61.5	61.5
137.8	92.2	185.2	93.0	156.5	94.8	114.6	99.2	99.2	82.5	82.5	58.4	58.4
150.9	78.3	174.2	79.2	148.4	80.8	110.8	85.8	92.7	77.7	77.7	55.8	55.8
164.0	66.1	164.2	66.9	141.1	68.3	107.2	73.8	86.9	71.7	73.5	53.4	53.4
177.2	55.6	155.4	56.2	134.5	57.3	103.8	63.1	81.8	64.4	69.7	51.1	51.1
190.3	47.2	148.1	47.7	129.3	48.6	101.0	54.4	77.4	55.6	66.4	49.4	49.4
203.4	39.7	141.5	40.1	124.6	40.9	98.7	46.5	73.4	47.6	63.4	46.4	47.8
213.3	34.7	137.1	35.2	121.3	35.7	97.2	41.2	70.8	42.3	61.3	43.4	46.7
216.5	33.1	135.6	33.5	120.2	-	-	39.5	69.9	40.6	60.6	42.3	46.3
229.7	27.6	130.4	28.1	117.2	-	-	33.7	66.8	34.7	58.4	36.2	45.1
239.5	23.8	127.0	24.0	114.6	-	-	29.7	64.7	30.5	56.9	31.7	44.3
242.8	22.7	126.2	-	-	-	-	28.5	64.1	29.3	56.4	30.4	44.1
249.3	20.5	124.6	-	-	-	-	26.2	62.9	26.9	55.6	27.8	43.7
252.6	-	-	-	-	-	-	25.0	62.3	25.7	55.1	24.0	43.4
255.9	-	-	-	-	-	-	23.8	61.7	24.5	54.7	-	-
269.0	-	-	-	-	-	-	19.7	59.7	20.4	53.4	-	-
278.9	-	-	-	-	-	-	16.8	58.3	17.2	52.5	-	-
282.2	-	-	-	-	-	-	16.0	58.0	-	-	-	-
288.7	-	-	-	-	-	-	14.3	57.3	-	-	-	-
295.3	-	-	-	-	-	-	-	-	-	-	-	-
308.4	-	-	-	-	-	-	-	-	-	-	-	-
315.0	-	-	-	-	-	-	-	-	-	-	-	-
321.5	-	-	-	-	-	-	-	-	-	-	-	-
324.8	-	-	-	-	-	-	-	-	-	-	-	-

	0 lb	143,300 lb	275,600 lb	363,800 lb	452,000 lb	540,200 lb	628,400 lb	716,600 lb
--	------	------------	------------	------------	------------	------------	------------	------------



SSL+LF

SUPERLIFT 3800

363,800 lb + 110,200 lb		27.6 ft		32.2 ft/s		360°		75%	
		255.9 ft		SSL+LF_1					
		39.4 ft		78.7 ft		118.1 ft			
		0 lb- 0 t	716.6klb	0 lb- 0 t	716.6klb	0 lb- 0 t	716.6klb	0 lb- 0 t	716.6klb
		15°		20°		30°		15°	
		20°		30°		15°		20°	
		30°		15°		30°		30°	
ft		1,000 lb							
45.9	359.4	363.8	-	-	-	-	-	-	-
49.2	337.3	352.7	266.8	266.8	-	-	-	-	-
52.5	315.3	341.7	260.1	260.1	-	-	-	-	-
55.8	297.6	331.8	253.5	253.5	164.2	164.2	-	-	-
59.1	280.0	321.9	246.9	246.9	160.9	160.9	176.4	176.4	-
65.6	249.1	304.2	235.9	235.9	155.4	155.4	166.4	166.4	127.9
72.2	224.9	288.8	227.1	227.1	151.0	151.0	157.6	157.6	122.4
78.7	202.8	273.4	205.0	218.3	146.6	146.6	148.8	148.8	116.8
82.0	194.0	267.9	195.7	213.8	144.4	144.4	145.5	145.5	114.6
85.3	185.2	262.4	186.3	209.4	142.2	142.2	142.2	142.2	112.4
91.9	168.7	249.1	170.9	201.7	138.9	138.9	135.6	135.6	107.8
98.4	154.3	240.3	156.5	195.1	134.5	134.5	129.0	129.0	103.8
101.7	148.3	235.9	150.3	192.0	132.3	133.0	126.6	126.6	102.1
111.5	130.1	222.7	131.5	182.6	125.7	128.6	119.4	119.4	96.8
124.7	108.9	206.5	109.9	171.2	112.0	122.7	109.2	110.6	90.4
137.8	90.8	191.8	91.7	160.9	93.5	116.8	98.3	102.5	84.7
150.9	76.9	180.8	77.7	152.9	79.4	113.2	84.7	96.0	80.0
164.0	64.5	170.5	65.3	145.5	66.8	109.6	72.3	90.2	72.7
177.2	53.8	160.9	54.5	138.9	55.8	106.0	61.3	84.9	62.8
190.3	45.4	153.6	45.9	133.7	47.1	103.1	52.6	80.5	54.0
203.4	37.8	147.0	38.4	128.6	39.3	100.5	44.8	76.4	46.0
216.5	31.1	141.1	31.7	123.5	32.4	98.3	37.7	72.5	38.8
226.4	27.1	136.7	27.6	121.3	28.0	97.0	33.4	70.2	34.4
229.7	25.8	135.2	26.2	120.5	-	-	32.0	69.4	32.9
242.8	20.9	130.4	21.2	117.6	-	-	26.7	66.6	27.6
255.9	16.3	126.8	16.8	114.6	-	-	22.0	63.9	22.7
265.7	13.4	124.6	-	-	-	-	19.0	62.3	19.6
269.0	-	-	-	-	-	-	17.9	61.7	18.6
282.2	-	-	-	-	-	-	14.2	59.8	14.8
295.3	-	-	-	-	-	-	10.8	58.2	10.6
305.1	-	-	-	-	-	-	8.6	57.1	-
308.4	-	-	-	-	-	-	-	-	-
321.5	-	-	-	-	-	-	-	-	-
324.8	-	-	-	-	-	-	-	-	-
331.4	-	-	-	-	-	-	-	-	-
334.6	-	-	-	-	-	-	-	-	-
341.2	-	-	-	-	-	-	-	-	-

	0 lb	143,300 lb	275,600 lb	363,800 lb	452,000 lb	540,200 lb	628,400 lb	716,600 lb
--	------	------------	------------	------------	------------	------------	------------	------------



SSL+LF

SUPERLIFT 3800

363,800 lb + 110,200 lb		27.6 ft		32.2 ft/s		360°		75%									
275.6 ft																	
SSL+LF_1																	
39.4 ft			78.7 ft			118.1 ft											
0 lb - 0 t	716.6klb	0 lb - 0 t	716.6klb	0 lb - 0 t	716.6klb	0 lb - 0 t	716.6klb	0 lb - 0 t	716.6klb								
15°	20°	30°	15°	20°	30°	15°	20°	30°									
1,000 lb																	
45.9	346.1	368.2	-	-	-	-	-	-	-								
49.2	324.1	358.3	269.0	269.0	-	-	-	-	-								
52.5	302.0	348.3	262.4	262.4	-	-	-	-	-								
55.8	285.5	338.4	256.8	256.8	164.2	164.2	-	-	-								
59.1	269.0	328.5	251.3	251.3	162.0	162.0	177.5	178.6	-								
65.6	240.3	310.9	240.3	240.3	157.6	157.6	168.7	168.7	129.0								
72.2	216.1	295.4	218.3	231.5	152.1	152.1	159.8	159.8	123.5								
78.7	195.1	282.2	197.3	222.7	147.7	147.7	152.1	152.1	117.9								
85.3	177.5	269.0	179.7	213.8	144.4	144.4	145.5	145.5	113.5								
91.9	160.9	257.9	163.1	206.1	140.0	140.0	138.9	138.9	109.8								
98.4	147.7	246.9	149.9	199.5	136.7	136.7	132.3	132.3	105.8								
101.7	142.2	242.5	144.2	196.4	133.7	135.2	129.9	129.9	104.1								
111.5	125.7	229.3	127.1	187.0	124.9	130.8	122.7	122.7	98.8								
124.7	105.5	213.5	106.7	176.0	109.6	124.9	110.2	113.9	92.4								
137.8	87.3	199.5	88.6	166.4	90.6	119.0	94.6	105.8	86.6								
150.9	73.0	187.8	74.1	158.4	76.1	115.4	81.2	99.2	80.0								
164.0	60.5	177.1	61.4	150.6	63.2	111.7	68.9	93.2	71.0								
177.2	49.6	167.6	50.5	143.3	52.0	108.0	57.8	87.7	59.5								
190.3	41.2	159.5	42.0	137.4	43.4	104.9	49.1	83.2	50.6								
203.4	33.7	152.1	34.3	132.3	35.5	102.2	41.2	79.0	42.5								
216.5	26.9	145.5	27.6	127.9	28.4	99.9	34.2	75.2	35.3								
229.7	21.5	140.4	22.0	124.2	22.9	98.1	28.3	71.9	29.4								
242.8	16.5	135.6	16.9	120.5	15.7	96.3	23.0	69.0	24.0								
255.9	12.1	131.2	12.3	116.8	-	-	18.3	66.4	19.2								
269.0	8.2	127.3	8.6	115.2	-	-	14.2	64.0	14.9								
272.3	-	126.5	-	114.6	-	-	13.2	63.4	13.9								
278.9	-	125.1	-	-	-	-	11.2	62.4	11.9								
282.2	-	124.6	-	-	-	-	10.4	61.9	11.0								
292.0	-	-	-	-	-	-	7.7	60.5	8.4								
295.3	-	-	-	-	-	-	-	60.0	-								
308.4	-	-	-	-	-	-	-	58.3	-								
311.7	-	-	-	-	-	-	-	57.9	-								
318.2	-	-	-	-	-	-	-	57.3	-								
321.5	-	-	-	-	-	-	-	57.1	-								
334.6	-	-	-	-	-	-	-	-	-								
347.8	-	-	-	-	-	-	-	-	-								
357.6	-	-	-	-	-	-	-	-	-								



0 lb

143,300 lb

275,600 lb

363,800 lb

452,000 lb

540,200 lb

628,400 lb

716,600 lb



TEREX®



SSL+LF

SUPERLIFT 3800

363,800 lb + 110,200 lb		27.6 ft		32.2 ft/s		360°		75%									
295.3 ft																	
SSL+LF_1																	
39.4 ft			78.7 ft			118.1 ft											
0 t	716.6klb	0 t	716.6klb	0 t	716.6klb	0 t	716.6klb	0 t	716.6klb								
15°	20°	30°	15°	20°	30°	15°	20°	30°									
1,000 lb																	
49.2	310.9	363.8	-	-	-	-	-	-	-								
52.5	291.0	352.7	266.8	266.8	-	-	-	-	-								
59.1	257.9	335.1	255.7	255.7	163.1	163.1	-	-	-								
62.3	243.6	326.3	244.7	250.2	160.9	160.9	175.3	176.4	-								
65.6	229.3	317.5	233.7	244.7	158.7	158.7	170.9	170.9	-								
68.9	218.3	309.7	221.6	240.3	156.5	156.5	167.0	167.0	127.9								
72.2	207.2	302.0	209.4	235.9	154.3	154.3	163.1	163.1	124.6								
75.5	197.3	295.4	199.5	231.5	152.1	152.1	159.3	159.3	122.4								
78.7	187.4	288.8	189.6	227.1	149.9	149.9	155.4	155.4	120.2								
82.0	178.6	282.2	180.8	222.7	147.7	147.7	151.6	151.6	117.9								
85.3	169.8	275.6	172.0	218.3	145.5	145.5	147.7	147.7	115.7								
91.9	154.3	264.6	156.5	210.5	142.2	142.2	142.2	142.2	111.3								
98.4	141.1	253.5	143.3	203.9	138.9	138.9	135.6	135.6	107.6								
105.0	130.5	244.7	132.3	197.7	130.4	130.4	127.9	127.9	104.1								
111.5	119.9	235.9	121.3	191.4	122.0	122.0	125.3	125.3	100.7								
124.7	100.9	220.1	101.9	180.4	104.9	104.9	116.4	116.4	94.4								
137.8	84.0	206.1	85.3	170.9	87.7	87.7	108.9	108.9	88.6								
150.9	69.6	194.4	70.8	162.8	72.9	72.9	102.3	102.3	83.9								
164.0	57.0	183.7	58.1	155.1	59.9	59.9	96.2	96.2	79.6								
177.2	46.1	174.2	47.2	147.7	48.7	48.7	90.6	90.6	75.6								
190.3	37.7	166.1	38.5	141.8	39.9	39.9	86.1	86.1	72.2								
203.4	30.1	158.4	30.8	136.3	32.0	32.0	81.8	81.8	69.2								
216.5	23.4	151.0	24.0	131.2	25.1	25.1	77.8	77.8	66.4								
229.7	17.9	145.1	18.4	127.5	19.4	19.4	74.4	74.4	63.9								
242.8	12.9	140.0	13.4	123.9	14.2	14.2	71.4	71.4	61.6								
255.9	8.4	135.6	8.8	120.2	9.5	9.5	68.6	68.6	59.5								
269.0	-	131.2	-	117.2	-	-	66.1	66.1	57.8								
278.9	-	128.2	-	115.2	-	-	64.4	64.4	56.5								
282.2	-	127.5	-	114.6	-	-	63.8	63.8	56.1								
285.4	-	126.8	-	114.1	-	-	63.3	63.3	55.8								
288.7	-	126.0	-	113.5	-	-	62.8	62.8	55.4								
295.3	-	124.6	-	-	-	-	61.7	61.7	54.7								
298.6	-	123.5	-	-	-	-	61.3	61.3	54.4								
305.1	-	-	-	-	-	-	60.5	60.5	53.8								
308.4	-	-	-	-	-	-	60.1	60.1	53.5								
321.5	-	-	-	-	-	-	58.6	58.6	52.5								
328.1	-	-	-	-	-	-	57.8	57.8	52.0								
331.4	-	-	-	-	-	-	57.5	57.5	-								
334.6	-	-	-	-	-	-	57.1	57.1	-								
337.9	-	-	-	-	-	-	56.9	56.9	-								
347.8	-	-	-	-	-	-	-	-	-								
360.9	-	-	-	-	-	-	-	-	-								
364.2	-	-	-	-	-	-	-	-	-								
374.0	-	-	-	-	-	-	-	-	-								
377.3	-	-	-	-	-	-	-	-	-								

0 lb	143,300 lb	275,600 lb	363,800 lb	452,000 lb	540,200 lb	628,400 lb	716,600 lb
------	------------	------------	------------	------------	------------	------------	------------



SSL+LF

SUPERLIFT 3800

363,800 lb + 110,200 lb		27.6 ft		32.2 ft/s		360°		75%									
315.0 ft																	
SSL+LF_1																	
39.4 ft			78.7 ft			118.1 ft											
0 lb - 0 t	716.6klb	0 lb - 0 t	716.6klb	0 lb - 0 t	716.6klb	0 lb - 0 t	716.6klb	0 lb - 0 t	716.6klb								
15°	20°	30°	15°	20°	30°	15°	20°	30°									
1,000 lb																	
49.2	297.6	368.2	-	-	-	-	-	-	-								
52.5	280.0	359.4	269.0	269.0	-	-	-	-	-								
59.1	246.9	341.7	251.3	257.9	164.2	164.2	-	-	-								
62.3	233.7	332.9	238.1	252.4	162.0	162.0	176.4	177.5	-								
65.6	220.5	324.1	224.9	246.9	159.8	159.8	172.0	173.1	-								
68.9	209.4	316.4	213.3	242.5	157.6	157.6	168.1	169.2	129.0								
72.2	198.4	308.6	201.7	238.1	155.4	155.4	164.2	165.3	125.7								
75.5	189.0	302.0	191.8	233.7	153.2	153.2	160.9	161.5	123.5								
78.7	179.7	295.4	181.9	229.3	151.0	151.0	157.6	157.6	121.3								
82.0	170.9	288.8	173.1	226.0	149.4	149.4	154.3	154.3	119.0								
85.3	162.0	282.2	164.2	222.7	147.7	147.7	151.0	151.0	116.8								
88.6	154.9	276.7	157.1	218.8	145.5	145.5	147.7	147.7	114.6								
91.9	147.7	271.2	149.9	215.0	143.3	143.3	144.4	144.4	112.4								
98.4	134.5	260.1	136.7	208.3	140.0	140.0	137.8	138.9	109.1								
105.0	124.0	251.3	126.0	202.1	129.3	137.1	127.7	133.7	105.7								
111.5	113.6	242.5	115.4	195.8	118.5	134.1	117.7	128.6	102.4								
124.7	95.4	226.7	96.9	184.8	99.7	128.6	99.9	119.4	95.0								
137.8	79.8	212.7	81.1	175.3	83.6	123.5	84.4	111.3	87.1								
150.9	65.6	201.0	66.9	166.4	69.2	119.0	72.4	104.9	74.9								
164.0	53.0	190.0	54.2	158.7	56.3	115.0	61.3	98.9	63.6								
177.2	42.1	179.7	43.2	152.1	45.0	111.3	51.1	93.5	53.1								
190.3	33.6	171.6	34.5	146.2	36.2	108.5	42.3	88.8	44.2								
203.4	25.9	163.9	26.7	140.7	28.2	105.8	34.3	84.4	36.0								
216.5	19.2	156.5	19.8	135.6	21.2	103.2	27.1	80.2	28.7								
229.7	13.6	150.6	14.3	131.2	15.4	101.0	21.4	76.9	22.6								
242.8	8.4	145.3	9.0	127.1	10.1	99.0	16.0	73.7	17.1								
246.1	-	144.0	7.7	126.2	8.8	98.5	14.8	73.0	15.9								
255.9	-	140.0	-	123.5	-	97.2	11.0	70.8	12.1								
265.7	-	136.7	-	121.3	-	96.3	7.9	68.9	9.0								
269.0	-	135.6	-	120.5	-	96.0	-	68.3	7.9								
272.3	-	134.5	-	119.8	-	95.7	-	67.6	-								
282.2	-	131.5	-	117.6	-	-	-	65.9	-								
285.4	-	130.6	-	116.8	-	-	-	65.4	-								
295.3	-	127.9	-	114.6	-	-	-	63.7	-								
308.4	-	124.9	-	96.6	-	-	-	61.8	-								
318.2	-	123.5	-	-	-	-	-	60.5	-								
321.5	-	-	-	-	-	-	-	60.1	-								
334.6	-	-	-	-	-	-	-	58.6	-								
344.5	-	-	-	-	-	-	-	57.8	-								
347.8	-	-	-	-	-	-	-	57.5	-								
354.3	-	-	-	-	-	-	-	56.9	-								
360.9	-	-	-	-	-	-	-	-	-								
374.0	-	-	-	-	-	-	-	-	-								
380.6	-	-	-	-	-	-	-	-	-								
387.1	-	-	-	-	-	-	-	-	-								
393.7	-	-	-	-	-	-	-	-	-								

	0 lb	143,300 lb	275,600 lb	363,800 lb	452,000 lb	540,200 lb	628,400 lb	716,600 lb
---	------	------------	------------	------------	------------	------------	------------	------------



SSL+LF

SUPERLIFT 3800

363,800 lb + 110,200 lb		27.6 ft		32.2 ft/s		360°		75%									
334.6 ft																	
SSL+LF_1																	
39.4 ft			78.7 ft			118.1 ft											
0 lb- 0 t	716.6klb	0 t	716.6klb	0 t	716.6klb	0 t	716.6klb	0 t	716.6klb								
15°	20°	30°	15°	20°	30°	15°	20°	30°									
1,000 lb																	
52.5	269.0	354.9	-	-	-	-	-	-	-								
55.8	253.5	350.5	255.7	266.8	-	-	-	-	-								
59.1	238.1	346.1	240.3	260.1	-	-	-	-	-								
62.3	225.4	338.4	228.2	255.7	162.0	162.0	-	-	-								
65.6	212.7	330.7	216.1	251.3	159.8	159.8	173.1	174.2	-								
72.2	190.7	315.3	192.9	242.5	156.5	156.5	165.3	167.6	126.8								
78.7	172.0	302.0	174.2	233.7	152.1	152.1	158.7	159.8	122.4								
85.3	155.4	288.8	157.6	224.9	148.8	148.8	153.2	153.2	117.9								
88.6	148.3	283.3	150.5	221.6	147.2	147.2	148.8	149.9	115.7								
91.9	141.1	277.8	143.3	218.3	145.5	145.5	144.4	146.6	113.5								
98.4	127.9	266.8	130.1	211.6	134.5	142.2	132.3	141.1	110.2								
108.3	112.7	253.5	114.6	202.8	118.5	137.2	117.3	133.9	105.4								
111.5	107.6	249.1	109.5	199.9	113.2	135.6	112.3	131.5	103.8								
124.7	89.8	233.0	91.5	188.9	94.6	130.1	94.7	122.4	94.4								
137.8	74.5	218.3	76.1	178.6	78.7	125.7	79.6	113.5	82.2								
150.9	61.4	206.5	62.8	170.5	65.3	121.3	67.7	107.5	70.2								
164.0	49.5	195.5	50.7	162.8	53.0	117.2	57.0	101.6	59.3								
177.2	38.6	185.2	39.7	155.4	41.7	113.5	47.6	95.9	49.6								
190.3	30.1	177.1	31.0	149.5	32.7	110.3	38.9	91.2	40.9								
203.4	22.3	169.4	23.2	144.0	24.7	107.4	31.0	86.8	32.9								
216.5	15.4	162.0	16.3	138.9	17.6	104.7	23.8	82.7	25.6								
229.7	9.8	155.9	10.6	134.5	11.8	102.4	17.9	79.1	19.5								
232.9	8.4	154.3	9.1	133.4	10.3	101.9	16.5	78.3	18.0								
236.2	-	152.1	7.7	132.3	8.8	101.2	15.0	77.4	16.5								
242.8	-	149.5	-	130.1	-	100.2	12.5	75.9	14.0								
252.6	-	145.7	-	126.8	-	98.8	8.8	73.7	10.1								
255.9	-	144.4	-	125.7	-	98.3	-	73.0	8.8								
259.2	-	143.3	-	124.9	-	98.0	-	72.3	7.7								
262.5	-	142.2	-	124.2	-	97.6	-	71.7	-								
269.0	-	140.0	-	122.7	-	96.9	-	70.3	-								
272.3	-	138.9	-	122.0	-	96.5	-	69.7	-								
275.6	-	137.8	-	121.3	-	96.1	-	69.0	-								
282.2	-	135.6	-	119.8	-	95.5	-	67.8	-								
285.4	-	134.5	-	119.0	-	95.2	-	67.2	-								
295.3	-	131.2	-	116.8	-	-	-	65.5	-								
308.4	-	127.5	-	114.6	-	-	-	63.6	-								
321.5	-	121.3	-	113.5	-	-	-	61.8	-								
324.8	-	119.0	-	96.3	-	-	-	61.4	-								
334.6	-	112.4	-	-	-	-	-	60.2	-								
347.8	-	-	-	-	-	-	-	58.7	-								
360.9	-	-	-	-	-	-	-	57.5	-								
370.7	-	-	-	-	-	-	-	56.7	-								
374.0	-	-	-	-	-	-	-	-	-								
387.1	-	-	-	-	-	-	-	-	-								
397.0	-	-	-	-	-	-	-	-	-								
400.3	-	-	-	-	-	-	-	-	-								
410.1	-	-	-	-	-	-	-	-	-								



0 lb

143,300 lb

275,600 lb

363,800 lb

452,000 lb

540,200 lb

628,400 lb

716,600 lb



SSL+LF

SUPERLIFT 3800



363,800 lb + 110,200 lb		27.6 ft		32.2 ft/s		360°		75%									
354.3 ft																	
SSL+LF_1																	
39.4 ft			78.7 ft			118.1 ft											
0 lb- 0 t	716.6klb	0 t	716.6klb	0 t	716.6klb	0 t	716.6klb	0 t	716.6klb								
15°	20°	30°	15°	20°	30°	15°	20°	30°									
1,000 lb																	
52.5	257.9	339.5	-	-	-	-	-	-	-								
55.8	242.5	339.5	244.7	269.0	-	-	-	-	-								
59.1	227.1	339.5	231.5	262.4	-	-	-	-	-								
62.3	215.0	335.1	218.8	257.9	163.1	163.1	-	-	-								
65.6	202.8	330.7	206.1	253.5	160.9	160.9	174.2	175.3	-								
72.2	181.9	319.7	185.2	244.7	157.6	157.6	166.4	168.7	127.9								
78.7	164.2	306.4	166.4	235.9	153.2	153.2	160.9	162.0	123.5								
85.3	147.7	295.4	149.9	229.3	149.9	149.9	152.1	155.4	119.0								
91.9	133.4	284.4	135.6	222.7	141.1	146.6	137.8	149.9	115.7								
98.4	121.3	273.4	123.5	215.0	127.9	143.3	125.7	143.3	111.3								
108.3	106.4	260.1	108.4	206.1	112.2	138.9	111.1	136.1	105.6								
111.5	101.4	255.7	103.3	203.2	107.0	137.4	106.3	133.7	103.7								
124.7	83.9	239.6	85.6	192.5	88.8	131.9	89.1	124.9	92.3								
137.8	68.8	224.9	70.3	183.0	73.2	126.8	74.1	116.8	77.2								
150.9	56.9	212.4	58.3	174.2	61.0	122.4	62.5	110.2	65.3								
164.0	45.4	201.0	46.7	166.1	49.2	118.3	52.0	104.1	54.5								
177.2	34.4	190.7	35.7	158.7	37.7	114.6	42.8	98.5	45.0								
190.3	25.9	181.9	26.9	152.9	28.9	111.7	35.0	93.7	37.0								
203.4	18.2	173.8	19.0	147.3	20.9	108.9	27.4	89.2	29.3								
216.5	11.2	166.4	12.1	142.2	13.7	106.3	20.1	85.1	21.8								
223.1	8.4	163.6	9.0	140.0	10.6	105.0	17.1	83.3	18.8								
226.4	-	161.8	-	138.9	9.0	104.4	15.7	82.5	17.3								
229.7	-	160.1	-	137.8	-	103.7	14.2	81.6	15.8								
242.8	-	154.0	-	133.4	-	101.6	8.6	78.2	10.1								
246.1	-	152.7	-	132.3	-	101.1	-	77.4	8.8								
252.6	-	150.1	-	130.1	-	100.1	-	75.8	-								
255.9	-	148.8	-	129.0	-	99.6	-	75.0	-								
259.2	-	147.5	-	128.1	-	99.2	-	74.3	-								
265.7	-	145.0	-	126.2	-	98.4	-	73.0	-								
269.0	-	143.7	-	125.3	-	98.0	-	72.3	-								
275.6	-	141.1	-	123.5	-	97.2	-	71.0	-								
282.2	-	139.3	-	122.4	-	96.6	-	69.8	-								
295.3	-	135.6	-	120.2	-	95.2	-	67.5	-								
301.8	-	130.8	-	118.7	-	92.8	-	66.4	-								
308.4	-	126.0	-	117.2	-	-	-	65.4	-								
321.5	-	118.2	-	114.6	-	-	-	63.5	-								
334.6	-	110.2	-	110.2	-	-	-	61.7	-								
337.9	-	108.1	-	108.6	-	-	-	61.4	-								
341.2	-	105.9	-	106.9	-	-	-	61.0	-								
347.8	-	101.6	-	-	-	-	-	60.3	-								
351.1	-	99.4	-	-	-	-	-	59.9	-								
360.9	-	-	-	-	-	-	-	58.9	-								
374.0	-	-	-	-	-	-	-	57.5	-								
377.3	-	-	-	-	-	-	-	57.3	-								
387.1	-	-	-	-	-	-	-	56.7	-								
390.4	-	-	-	-	-	-	-	56.4	-								
400.3	-	-	-	-	-	-	-	-	-								
413.4	-	-	-	-	-	-	-	-	-								
426.5	-	-	-	-	-	-	-	-	-								

	0 lb	143,300 lb	275,600 lb	363,800 lb	452,000 lb	540,200 lb	628,400 lb	716,600 lb
---	------	------------	------------	------------	------------	------------	------------	------------



LSL+LF_2



SUPERLIFT 3800

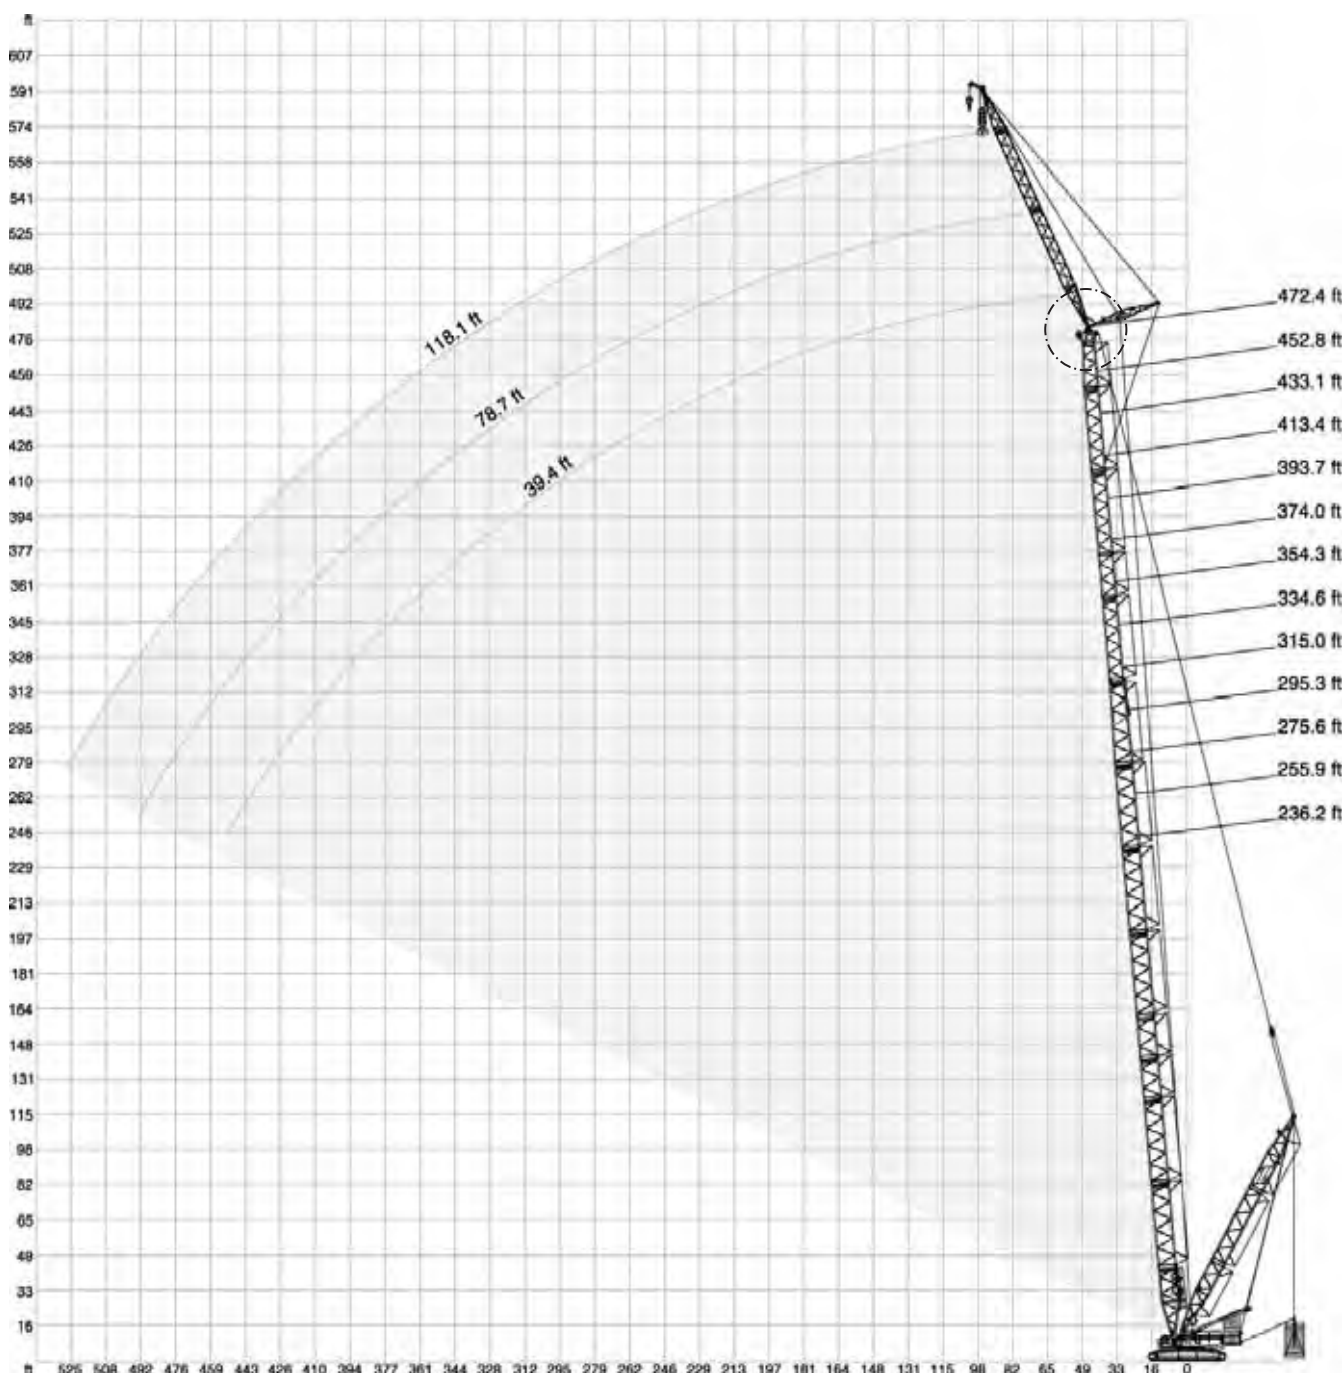

* Attachable

LSL+LF_3

SUPERLIFT 3800

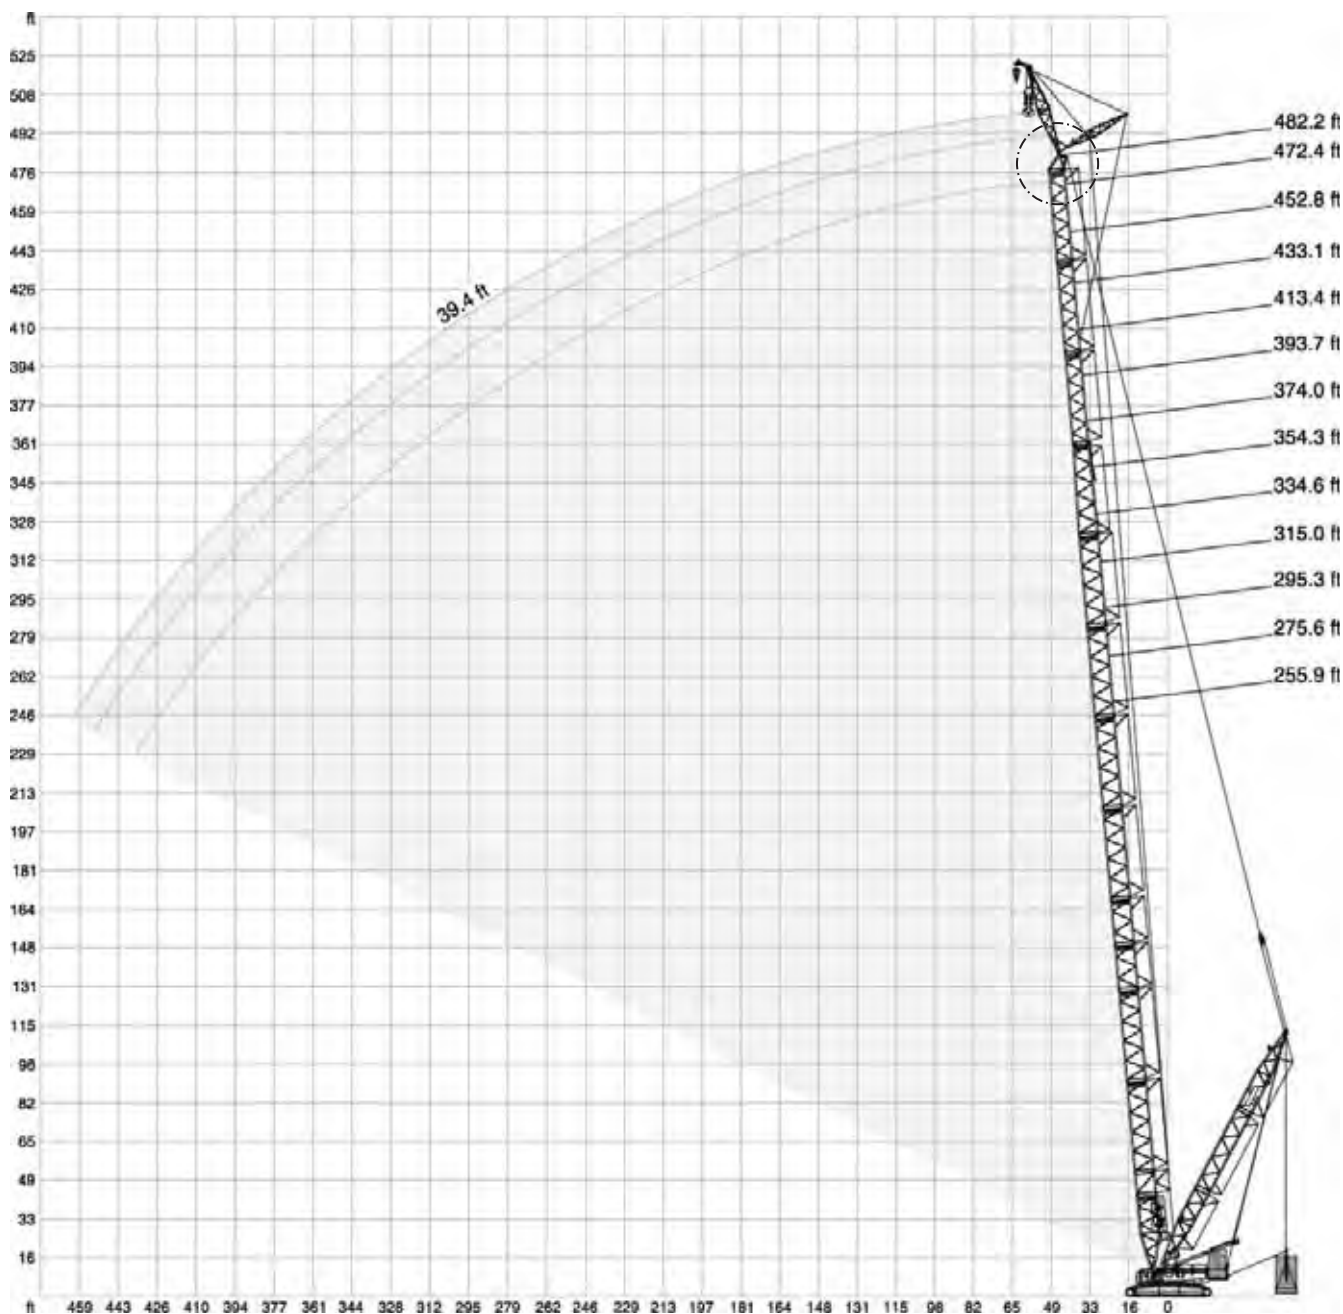

** Option



TEREX



LSL+LF

SUPERLIFT 3800

275,600 lb + 110,200 lb		27.6 ft		32.2 ft/s		360°		75%	
236.2 ft		LSL+LF_2		LSL+LF_3		LSL+LF_2			
39.4 ft		78.7 ft		118.1 ft					
0 lb		0 lb		0 lb		0 lb		0 lb	
716.6 klb		716.6 klb		716.6 klb		716.6 klb		716.6 klb	
15°		20°		30°		15°		20°	
30°		15°		20°		30°		15°	
20°		30°		15°		20°		30°	
ft	t	t	t	t	t	t	t	t	t
39.4	321.9	392.4	-	-	-	-	-	-	-
42.7	298.7	380.3	291.0	291.0	-	-	-	-	-
45.9	275.6	368.2	280.0	282.2	-	-	-	-	-
49.2	257.9	357.1	261.2	275.6	179.7	179.7	-	-	-
52.5	240.3	346.1	242.5	269.0	176.4	176.4	-	-	-
59.1	211.6	326.3	215.0	255.7	170.9	170.9	-	-	-
65.6	188.5	308.6	190.7	244.7	164.2	164.2	-	-	-
72.2	168.7	291.0	170.9	233.7	159.8	159.8	-	-	-
75.5	160.4	284.4	162.6	229.3	157.1	157.1	-	-	-
78.7	152.1	277.8	154.3	224.9	154.3	154.3	-	-	-
85.3	137.8	264.6	140.0	216.1	142.2	149.9	-	-	-
91.9	125.7	253.5	126.8	207.2	130.1	145.5	-	-	-
95.1	120.2	248.0	121.3	203.4	124.0	143.3	-	-	-
98.4	114.6	242.5	115.7	199.5	117.9	141.1	-	-	-
111.5	96.4	224.9	97.4	187.0	99.3	134.5	-	-	-
124.7	80.1	208.7	81.0	175.6	82.7	128.2	-	-	-
137.8	65.7	194.0	66.6	165.3	68.1	122.4	-	-	-
150.9	54.8	183.0	55.6	157.3	57.0	117.9	-	-	-
164.0	45.3	172.7	45.9	149.5	47.1	113.9	-	-	-
177.2	37.0	163.1	37.7	142.2	38.6	110.2	-	-	-
190.3	30.7	155.8	31.2	137.1	32.0	107.6	-	-	-
203.4	25.1	149.2	25.4	132.3	26.0	105.2	-	-	-
213.3	21.3	144.8	21.6	129.0	19.0	103.6	-	-	-
216.5	20.1	143.3	20.3	127.9	-	-	-	-	-
229.7	15.9	138.2	16.2	124.2	-	-	-	-	-
239.5	13.1	134.8	13.2	122.4	-	-	-	-	-
242.8	12.2	133.9	-	-	-	-	-	-	-
249.3	10.6	132.3	-	-	-	-	-	-	-
255.9	-	-	-	-	-	-	-	-	-
269.0	-	-	-	-	-	-	-	-	-
275.6	-	-	-	-	-	-	-	-	-
278.9	-	-	-	-	-	-	-	-	-
282.2	-	-	-	-	-	-	-	-	-
285.4	-	-	-	-	-	-	-	-	-
288.7	-	-	-	-	-	-	-	-	-
292.0	-	-	-	-	-	-	-	-	-
295.3	-	-	-	-	-	-	-	-	-
308.4	-	-	-	-	-	-	-	-	-
315.0	-	-	-	-	-	-	-	-	-
321.5	-	-	-	-	-	-	-	-	-
324.8	-	-	-	-	-	-	-	-	-



0 lb

143,300 lb

275,600 lb

363,800 lb

452,000 lb

540,200 lb

628,400 lb

716,600 lb



LSL+LF

SUPERLIFT 3800

275,600 lb + 110,200 lb		27.6 ft		32.2 ft/s		360°		75%	
255.9 ft		LSL+LF_2		LSL+LF_3		LSL+LF_2			
39.4 ft		78.7 ft		118.1 ft					
0-716.6 klb		0-716.6 klb		0-716.6 klb		0-716.6 klb		0-716.6 klb	
15°		20°		30°		15°		20°	
30°		15°		20°		30°		15°	
20°		30°		15°		20°		30°	
ft	t	t	t	t	t	t	t	t	t
42.7	284.4	388.0	-	-	-	-	-	-	-
45.9	262.4	374.8	266.8	286.6	-	-	343.9	273.4	-
52.5	229.3	352.7	231.5	273.4	178.6	178.6	326.3	260.1	-
55.8	216.1	342.8	218.3	266.8	175.3	175.3	317.5	254.6	186.3
59.1	202.8	332.9	205.0	260.1	172.0	172.0	308.6	249.1	180.8
62.3	191.3	324.1	194.0	254.6	169.2	169.2	302.0	244.7	176.4
65.6	179.7	315.3	183.0	249.1	166.4	166.4	295.4	240.3	172.0
68.9	170.3	307.5	173.1	243.6	164.2	164.2	288.3	234.8	167.0
72.2	160.9	299.8	163.1	238.1	162.0	162.0	281.1	229.3	162.0
78.7	145.5	286.6	146.6	229.3	151.0	156.5	266.8	220.5	146.6
85.3	131.2	273.4	132.3	220.5	135.6	152.1	255.7	212.7	132.3
91.9	119.0	262.4	120.2	212.7	123.5	147.7	244.7	205.0	121.3
95.1	113.8	256.8	115.1	209.4	117.9	146.1	239.8	201.7	115.7
98.4	108.5	251.3	110.0	206.1	112.4	144.4	234.8	198.4	110.2
111.5	91.6	232.2	92.8	192.9	95.1	137.1	216.6	185.9	94.1
124.7	76.1	215.7	77.2	181.1	79.2	130.8	202.5	174.9	79.8
137.8	61.9	201.7	63.1	170.9	64.8	125.7	190.7	165.3	67.5
150.9	50.9	190.7	51.9	162.0	53.5	120.5	180.4	157.3	57.6
164.0	41.3	180.4	42.1	154.3	43.6	116.1	170.9	149.5	48.4
177.2	33.1	170.9	33.7	147.7	35.1	112.4	162.0	142.2	39.7
190.3	26.7	162.8	27.3	141.8	28.3	109.8	154.7	136.3	33.1
203.4	21.0	155.4	21.5	136.3	22.3	107.2	147.7	131.2	27.0
216.5	15.9	148.8	16.3	131.2	17.0	104.7	141.1	126.8	21.6
226.4	12.8	145.0	13.1	128.7	13.7	103.4	137.2	124.1	18.3
229.7	11.8	143.7	12.1	127.9	-	-	136.0	123.2	17.2
242.8	7.9	138.9	8.2	124.8	-	-	131.5	120.6	13.1
255.9	-	134.5	-	121.3	-	-	127.9	117.9	9.3
262.5	-	133.0	-	-	-	-	126.4	-	7.7
265.7	-	132.3	-	-	-	-	125.7	-	66.4
269.0	-	-	-	-	-	-	-	-	65.8
275.6	-	-	-	-	-	-	-	-	64.6
278.9	-	-	-	-	-	-	-	-	64.2
282.2	-	-	-	-	-	-	-	-	63.7
285.4	-	-	-	-	-	-	-	-	63.3
292.0	-	-	-	-	-	-	-	-	62.4
295.3	-	-	-	-	-	-	-	-	61.9
301.8	-	-	-	-	-	-	-	-	61.3
308.4	-	-	-	-	-	-	-	-	-
321.5	-	-	-	-	-	-	-	-	-
331.4	-	-	-	-	-	-	-	-	-
334.6	-	-	-	-	-	-	-	-	-
341.2	-	-	-	-	-	-	-	-	-

0 lb	143,300 lb	275,600 lb	363,800 lb	452,000 lb	540,200 lb	628,400 lb	716,600 lb
------	------------	------------	------------	------------	------------	------------	------------



LSL+LF

SUPERLIFT 3800

275,600 lb + 110,200 lb		27.6 ft		32.2 ft/s		360°		75%		
LSL+LF_2		LSL+LF_3		LSL+LF_2						
39.4 ft		78.7 ft		118.1 ft						
0 lb	0-716.6 klb	0 lb	0-716.6 klb	0 lb	0-716.6 klb	0 lb	0-716.6 klb	0 lb	0-716.6 klb	
15°	20°	30°	15°	20°	15°	20°	30°	15°	20°	30°
ft	t	t	t	t	t	t	t	t	t	t
42.7	271.2	392.4	-	-	-	-	-	-	-	-
45.9	253.5	381.4	255.7	291.0	-	-	341.7	277.8	-	-
52.5	220.5	361.6	222.7	277.8	179.7	179.7	328.5	264.6	-	-
55.8	207.8	351.6	210.0	271.2	176.9	176.9	321.9	259.0	187.4	188.5
59.1	195.1	341.7	197.3	264.6	174.2	174.2	315.3	253.5	183.0	184.1
62.3	184.1	332.9	186.3	259.0	171.4	171.4	307.5	248.0	178.0	179.7
65.6	173.1	324.1	175.3	253.5	168.7	168.7	299.8	242.5	173.1	175.3
68.9	163.7	316.4	165.9	249.1	164.8	165.9	293.8	238.1	164.2	170.9
72.2	154.3	308.6	156.5	244.7	160.9	163.1	287.7	233.7	155.4	166.4
75.5	146.6	300.9	148.8	239.2	153.2	160.9	281.6	229.3	148.3	162.6
78.7	138.9	293.2	141.1	233.7	145.5	158.7	275.6	224.9	141.1	158.7
85.3	125.7	282.2	127.9	224.9	131.2	154.3	263.5	217.2	127.9	152.1
91.9	113.5	269.0	115.7	218.3	119.0	149.9	251.3	209.4	115.7	145.5
98.4	103.8	257.9	105.4	210.5	108.2	146.6	241.4	202.8	106.5	138.9
111.5	87.2	240.3	88.6	198.0	91.1	140.0	223.8	190.3	90.2	128.6
124.7	72.5	224.1	73.7	186.7	75.8	133.7	209.8	179.3	76.0	119.4
137.8	59.5	209.4	60.6	176.4	62.6	127.9	197.3	169.8	63.9	111.3
150.9	48.5	197.7	49.5	167.6	51.1	123.5	187.0	162.4	54.5	104.6
164.0	38.9	187.0	39.7	159.5	41.2	119.0	177.5	155.1	45.7	98.4
177.2	30.6	177.5	31.3	152.1	32.6	114.6	168.7	147.7	37.5	92.8
190.3	24.2	168.7	24.8	146.2	25.9	111.7	160.6	141.8	30.7	88.1
203.4	18.4	160.9	19.0	140.7	19.8	109.0	153.2	136.3	24.6	83.8
216.5	13.2	154.3	13.7	135.6	14.6	106.5	146.6	131.2	19.2	79.8
229.7	9.0	149.0	9.4	131.2	10.1	104.6	140.7	126.8	14.8	76.4
232.9	7.9	147.7	8.4	130.1	9.0	104.1	139.3	125.7	13.7	75.6
236.2	-	145.5	-	129.0	7.9	103.6	137.8	124.6	12.6	74.7
239.5	-	144.4	-	128.2	-	103.2	136.7	123.8	11.6	74.1
242.8	-	143.3	-	127.5	-	-	135.6	123.1	10.6	73.4
252.6	-	140.0	-	125.3	-	-	132.3	120.9	7.7	71.3
255.9	-	138.9	-	124.6	-	-	131.2	120.2	-	70.5
259.2	-	138.0	-	123.9	-	-	130.4	119.7	-	69.9
265.7	-	136.1	-	122.6	-	-	129.0	118.8	-	68.7
269.0	-	135.2	-	121.9	-	-	128.2	118.4	-	68.0
272.3	-	134.3	-	121.3	-	-	127.5	117.9	-	67.4
278.9	-	132.3	-	-	-	-	126.2	-	-	66.3
282.2	-	131.2	-	-	-	-	125.7	-	-	65.8
295.3	-	-	-	-	-	-	-	-	-	63.9
308.4	-	-	-	-	-	-	-	-	-	62.3
315.0	-	-	-	-	-	-	-	-	-	61.5
321.5	-	-	-	-	-	-	-	-	-	60.8
334.6	-	-	-	-	-	-	-	-	-	-
347.8	-	-	-	-	-	-	-	-	-	-
357.6	-	-	-	-	-	-	-	-	-	-

	0 lb	143,300 lb	275,600 lb	363,800 lb	452,000 lb	540,200 lb	628,400 lb	716,600 lb
---	------	------------	------------	------------	------------	------------	------------	------------



LSL+LF

SUPERLIFT 3800

275,600 lb + 110,200 lb		27.6 ft		32.2 ft/s		360°		75%					
374.0 ft													
LSL+LF_2					LSL+LF_3			LSL+LF_2					
39.4 ft					78.7 ft			118.1 ft					
0-716.6 klb					0-716.6 klb			0-716.6 klb					
15°					15°			15°					
ft	t	t	t	t	t	t	t	t	t				
52.5	174.2	282.2	-	-	-	-	-	-	-				
55.8	163.7	282.2	166.4	264.6	-	-	288.8	249.1	-				
59.1	153.2	282.2	156.5	264.6	-	-	288.8	249.1	-				
62.3	143.9	282.2	147.2	264.6	153.2	176.4	288.8	248.0	-				
65.6	134.5	282.2	137.8	264.6	143.3	174.2	288.8	246.9	138.9				
72.2	119.0	282.2	122.4	262.4	127.9	169.8	287.7	244.7	123.5				
78.7	106.5	280.0	108.9	253.5	113.5	166.4	286.6	242.5	110.2				
85.3	94.6	277.8	97.0	244.7	101.4	162.0	281.1	235.9	99.4				
88.6	89.4	276.7	91.7	241.4	95.9	160.4	278.3	232.6	94.2				
91.9	84.2	275.6	86.4	238.1	90.4	158.7	275.6	229.3	89.1				
98.4	75.0	273.4	76.9	231.5	80.7	155.4	270.1	222.7	80.0				
105.0	67.5	270.4	69.4	225.2	72.9	152.1	264.6	216.8	72.6				
111.5	60.1	267.5	61.8	219.0	65.1	148.8	259.0	210.9	65.2				
124.7	47.1	257.2	48.6	207.6	51.4	142.9	247.7	199.9	52.2				
137.8	35.9	242.5	37.3	197.3	39.7	137.8	235.9	189.6	41.0				
150.9	27.1	229.3	28.4	188.5	30.7	133.4	216.8	180.8	32.2				
164.0	19.3	217.5	20.5	180.4	22.6	129.0	202.2	172.4	24.3				
177.2	12.3	207.2	13.4	173.1	15.2	124.6	189.6	165.3	17.2				
183.7	8.8	201.7	9.9	169.8	11.7	123.5	182.2	161.3	14.3				
187.0	-	199.5	8.2	168.1	9.9	122.4	178.6	159.8	12.9				
190.3	-	197.3	-	166.4	8.2	121.3	174.9	158.4	11.5				
196.9	-	192.9	-	163.1	-	119.0	168.7	155.4	8.6				
200.1	-	190.9	-	161.7	-	118.3	167.0	154.1	-				
203.4	-	188.9	-	160.2	-	117.6	165.3	152.9	-				
206.7	-	186.8	-	158.7	-	116.8	163.7	151.6	-				
210.0	-	184.8	-	157.3	-	116.1	162.0	150.3	-				
216.5	-	180.8	-	154.3	-	114.6	158.7	147.7	-				
229.7	-	174.2	-	149.2	-	112.4	151.4	143.3	-				
242.8	-	165.7	-	144.4	-	110.2	145.9	137.8	-				
255.9	-	155.4	-	140.0	-	108.0	141.1	133.4	-				
269.0	-	144.4	-	136.3	-	106.1	137.4	130.4	-				
282.2	-	133.4	-	132.3	-	104.4	133.2	126.8	-				
295.3	-	124.6	-	124.6	-	102.7	123.5	123.5	-				
308.4	-	116.5	-	116.5	-	101.5	115.4	115.4	-				
315.0	-	112.4	-	112.4	-	75.2	111.3	111.3	-				
321.5	-	108.7	-	108.8	-	-	107.7	107.8	-				
334.6	-	101.2	-	101.6	-	-	100.5	100.8	-				
347.8	-	94.6	-	94.9	-	-	93.9	94.1	-				
351.1	-	92.9	-	93.2	-	-	92.3	92.5	-				
357.6	-	89.8	-	78.7	-	-	89.1	55.6	-				
360.9	-	88.3	-	-	-	-	87.6	-	-				
364.2	-	86.8	-	-	-	-	86.1	-	-				
367.5	-	85.3	-	-	-	-	84.7	-	-				
374.0	-	-	-	-	-	-	-	-	-				
377.3	-	-	-	-	-	-	-	-	-				
387.1	-	-	-	-	-	-	-	-	-				
393.7	-	-	-	-	-	-	-	-	-				
400.3	-	-	-	-	-	-	-	-	-				
406.8	-	-	-	-	-	-	-	-	-				
413.4	-	-	-	-	-	-	-	-	-				
426.5	-	-	-	-	-	-	-	-	-				
429.8	-	-	-	-	-	-	-	-	-				
439.6	-	-	-	-	-	-	-	-	-				
442.9	-	-	-	-	-	-	-	-	-				

 0 lb

143,300 lb

275,600 lb

363,800 lb

452,000 lb

540,200 lb

628,400 lb

716,600 lb



LSL+LF

SUPERLIFT 3800

275,600 lb + 110,200 lb		27.6 ft		32.2 ft/s		360°		75%	
413.4 ft		423.2 ft							
LSL+LF_2		LSL+LF_3		LSL+LF_2		LSL+LF_3			
39.4 ft		78.7 ft		118.1 ft		39.4 ft			
0-716.6 klb		0-716.6 klb		0-716.6 klb		0-716.6 klb			
0 lb		0 lb		0 lb		0 lb			
15°		20°		30°		15°		20°	
15°		20°		30°		15°		20°	
ft	t	t	t	t	t	t	t	t	t
55.8	151.0	218.3	-	-	-	-	-	-	-
59.1	141.1	218.3	144.4	212.7	-	235.9	231.5	-	-
65.6	124.6	217.2	126.8	211.6	133.4	176.4	235.9	229.3	-
68.9	117.4	216.6	119.6	211.6	125.7	174.2	235.3	229.3	121.3
72.2	110.2	216.1	112.4	211.6	117.9	172.0	234.8	229.3	114.6
75.5	103.8	216.1	106.2	211.1	111.3	169.8	234.2	229.3	108.5
78.7	97.4	216.1	99.9	210.5	104.7	167.6	233.7	229.3	102.3
82.0	91.8	215.5	94.2	210.5	98.9	165.9	233.1	228.2	96.8
85.3	86.2	215.0	88.6	210.5	93.0	164.2	232.6	227.1	91.3
88.6	81.4	213.8	83.6	210.0	87.9	162.6	232.0	227.1	86.3
91.9	76.5	212.7	78.5	209.4	82.7	160.9	231.5	227.1	81.4
98.4	67.7	211.6	69.7	207.2	73.6	157.6	230.4	224.9	72.8
108.3	57.0	209.4	58.8	205.0	62.4	153.2	228.7	222.7	62.1
111.5	53.4	209.1	55.1	204.3	58.6	151.8	228.2	221.9	58.5
124.7	40.9	206.5	42.4	200.6	45.5	146.2	224.9	218.6	45.9
137.8	30.0	202.8	31.5	196.2	34.2	141.1	220.5	215.0	35.1
150.9	21.6	198.4	22.9	191.1	25.4	136.7	213.8	208.3	26.5
164.0	14.0	192.9	15.1	186.3	17.4	132.3	209.4	201.7	18.9
173.9	8.8	186.7	10.1	177.8	12.1	129.0	203.2	195.9	13.8
177.2	-	185.2	8.4	176.4	10.4	127.9	201.7	194.0	12.1
180.4	-	181.9	-	174.5	8.8	126.9	198.8	191.4	10.6
183.7	-	179.7	-	172.7	-	126.0	196.9	190.0	9.0
190.3	-	177.5	-	169.0	-	124.2	194.4	187.0	-
193.6	-	176.4	-	167.2	-	123.3	193.1	185.6	-
196.9	-	175.3	-	165.3	-	122.4	191.8	184.1	-
203.4	-	170.1	-	161.3	-	120.9	187.0	178.2	-
216.5	-	163.1	-	155.4	-	117.9	181.9	173.1	-
229.7	-	157.3	-	148.1	-	115.0	174.5	165.7	-
242.8	-	151.0	-	142.9	-	112.4	164.2	159.5	-
255.9	-	146.6	-	138.9	-	110.2	151.0	152.1	-
269.0	-	140.0	-	135.4	-	108.6	140.0	140.0	-
282.2	-	130.8	-	129.3	-	106.7	129.7	129.7	-
295.3	-	121.3	-	121.3	-	104.9	120.2	120.2	-
308.4	-	112.6	-	112.9	-	103.5	111.9	112.2	-
321.5	-	104.4	-	104.9	-	101.1	104.0	104.4	-
334.6	-	96.8	-	97.2	-	97.9	96.3	96.6	-
344.5	-	91.8	-	92.2	-	69.2	91.3	91.5	-
347.8	-	90.2	-	90.5	-	-	89.6	89.8	-
360.9	-	83.8	-	84.0	-	-	83.2	83.3	-
374.0	-	77.8	-	78.3	-	-	77.4	77.6	-
380.6	-	75.3	-	75.6	-	-	74.8	75.0	-
387.1	-	72.7	-	73.0	-	-	72.2	72.3	-
390.4	-	71.4	-	71.7	-	-	71.0	-	-
397.0	-	68.9	-	-	-	-	68.5	-	-
400.3	-	67.7	-	-	-	-	67.2	-	-
410.1	-	-	-	-	-	-	-	-	-
413.4	-	-	-	-	-	-	-	-	-
416.7	-	-	-	-	-	-	-	-	-
426.5	-	-	-	-	-	-	-	-	-
439.6	-	-	-	-	-	-	-	-	-
452.8	-	-	-	-	-	-	-	-	-
465.9	-	-	-	-	-	-	-	-	-
479.0	-	-	-	-	-	-	-	-	-

0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb



LSL+LF

SUPERLIFT 3800

275,600 lb + 110,200 lb		27.6 ft		32.2 ft/s		360°		75%							
433.1 ft															
LSL+LF_2					LSL+LF_3										
39.4 ft					78.7 ft										
118.1 ft					39.4 ft										
0 lb	0-716.6 klb	0 lb	0-716.6 klb	0 lb	0-716.6 klb	0 lb	0-716.6 klb	0 lb	0-716.6 klb						
15°	20°	30°	15°	20°	15°	20°	30°	15°	20°						
ft	t	t	t	t	t	t	t	t	t						
55.8	144.4	191.8	-	-	-	-	-	-	-						
59.1	134.5	190.7	137.8	187.4	-	-	217.2	212.7	-						
62.3	126.8	190.7	129.5	186.8	-	-	216.6	212.2	-						
65.6	119.0	190.7	121.3	186.3	127.9	169.8	216.1	211.6	-						
72.2	104.7	189.6	107.6	185.2	112.4	168.7	215.5	211.6	109.6						
78.7	92.6	188.5	95.0	185.2	100.1	168.7	215.0	210.5	97.4						
85.3	81.6	187.4	84.0	184.1	88.6	165.3	214.4	209.4	86.9						
88.6	76.8	186.3	79.1	183.0	83.6	163.7	214.1	208.9	82.0						
91.9	72.1	185.2	74.3	181.9	78.5	162.0	213.8	208.3	77.2						
95.1	67.8	184.6	69.9	181.3	74.1	160.4	213.3	207.8	73.0						
98.4	63.5	184.1	65.5	180.8	69.7	158.7	212.7	207.2	68.8						
111.5	49.5	181.9	51.4	178.6	55.0	152.9	210.0	205.0	54.8						
124.7	37.3	180.0	38.9	176.4	42.0	147.3	206.9	202.1	42.5						
137.8	26.7	178.6	28.0	174.2	30.9	142.2	203.9	198.4	31.7						
150.9	18.3	174.9	19.6	170.5	22.2	137.8	199.5	193.1	23.4						
164.0	10.7	171.2	11.9	167.8	14.2	133.4	192.9	185.9	15.8						
167.3	9.0	170.3	10.1	166.9	12.4	132.3	191.8	184.6	14.1						
170.6	-	169.4	8.4	166.0	10.6	131.2	190.7	183.4	12.4						
173.9	-	168.5	-	165.1	8.8	130.1	189.6	182.1	10.7						
177.2	-	167.6	-	164.2	-	129.0	188.5	180.8	9.0						
183.7	-	162.4	-	159.1	-	127.5	184.1	174.9	-						
187.0	-	161.5	-	158.2	-	126.8	183.0	173.6	-						
190.3	-	160.6	-	157.3	-	126.0	181.9	172.3	-						
203.4	-	154.7	-	151.4	-	122.7	174.2	165.3	-						
216.5	-	151.0	-	147.7	-	119.0	169.8	159.8	-						
229.7	-	145.1	-	141.1	-	116.8	162.4	154.7	-						
242.8	-	141.1	-	137.1	-	114.3	155.8	148.8	-						
255.9	-	136.7	-	133.4	-	111.3	147.7	144.4	-						
269.0	-	133.9	-	129.3	-	109.8	136.7	136.0	-						
282.2	-	127.9	-	124.9	-	107.8	126.0	126.4	-						
295.3	-	119.0	-	119.0	-	106.0	115.7	116.8	-						
308.4	-	110.2	-	110.5	-	104.4	107.5	108.3	-						
321.5	-	101.9	-	102.4	-	100.8	99.6	100.2	-						
334.6	-	94.1	-	94.6	-	95.2	91.9	92.4	-						
347.8	-	87.4	-	87.7	-	88.5	85.1	84.9	-						
360.9	-	81.1	-	81.4	-	48.5	78.9	75.1	-						
374.0	-	75.2	-	75.4	-	-	73.0	64.4	-						
387.1	-	69.9	-	70.1	-	-	62.4	53.6	-						
393.7	-	67.2	-	67.5	-	-	57.1	48.5	-						
400.3	-	65.0	-	65.1	-	-	51.4	43.0	-						
403.5	-	63.8	-	64.0	-	-	48.6	40.1	-						
410.1	-	61.5	-	22.7	-	-	42.9	-	-						
413.4	-	60.4	-	-	-	-	40.1	-	-						
419.9	-	58.2	-	-	-	-	34.4	-	-						
426.5	-	-	-	-	-	-	-	-	-						
433.1	-	-	-	-	-	-	-	-	-						
439.6	-	-	-	-	-	-	-	-	-						
446.2	-	-	-	-	-	-	-	-	-						
452.8	-	-	-	-	-	-	-	-	-						
456.0	-	-	-	-	-	-	-	-	-						
465.9	-	-	-	-	-	-	-	-	-						
479.0	-	-	-	-	-	-	-	-	-						
482.3	-	-	-	-	-	-	-	-	-						
492.1	-	-	-	-	-	-	-	-	-						
495.4	-	-	-	-	-	-	-	-	-						

0 lb	143,300 lb	275,600 lb	363,800 lb	452,000 lb	540,200 lb	628,400 lb	716,600 lb
------	------------	------------	------------	------------	------------	------------	------------



LSL+LF

SUPERLIFT 3800


275,600 lb +  110,200 lb		 27.6 ft		 32.2 ft/s		360°		75%	
	492.1 ft		502.0 ft		511.8 ft		521.7 ft		
	LSL+LF_4								
	12 m								
		0 t	0-716.6 klb	0 t	0-716.6 klb	0 t	0-716.6 klb	0 t	0-716.6 klb
		15°	20°	15°	20°	15°	20°	15°	20°
ft	t	t	t	t	t	t	t	t	t
62.3	103.8	158.7	-	-	100.5	152.1	-	-	-
65.6	97.0	157.6	100.1	154.3	93.5	152.1	96.8	148.8	90.2
68.9	91.0	157.4	93.7	153.8	87.6	151.8	90.4	148.3	84.3
72.2	85.0	157.1	87.3	153.2	81.7	151.6	84.0	147.7	78.5
78.7	73.0	156.5	75.8	152.1	69.9	151.0	72.8	147.7	66.8
85.3	63.7	155.4	65.7	152.1	60.6	149.9	62.8	146.6	57.7
91.9	54.5	154.3	56.7	151.0	51.4	148.8	54.0	145.5	48.5
98.4	46.8	153.2	48.7	149.9	44.0	147.7	45.9	144.4	41.2
111.5	33.2	150.5	35.5	147.7	30.5	145.5	32.9	142.2	27.9
124.7	22.1	147.9	23.9	145.3	19.5	143.7	21.4	140.5	16.9
131.2	17.1	147.0	18.9	144.0	14.6	142.6	16.3	140.0	11.9
134.5	14.6	146.6	16.4	143.3	12.2	141.8	13.8	139.4	9.5
137.8	12.1	145.5	13.9	142.2	9.7	141.1	11.2	138.9	-
141.1	10.0	144.8	11.8	141.6	-	140.5	9.3	138.2	-
144.4	7.9	144.0	9.7	141.1	-	140.0	-	137.4	-
150.9	-	142.6	-	140.0	-	138.9	-	136.0	-
164.0	-	139.6	-	137.4	-	136.3	-	133.4	-
177.2	-	136.7	-	134.5	-	133.4	-	131.2	-
190.3	-	133.7	-	131.5	-	131.2	-	129.0	-
203.4	-	129.5	-	127.2	-	127.5	-	125.7	-
216.5	-	126.8	-	124.6	-	124.6	-	122.4	-
229.7	-	121.9	-	119.6	-	121.3	-	119.0	-
242.8	-	117.6	-	115.4	-	117.6	-	115.4	-
255.9	-	114.6	-	112.4	-	114.6	-	112.4	-
269.0	-	111.0	-	110.1	-	111.0	-	109.3	-
282.2	-	108.5	-	106.8	-	108.6	-	107.1	-
295.3	-	105.8	-	104.3	-	106.3	-	104.7	-
308.4	-	98.6	-	98.5	-	97.2	-	97.9	-
321.5	-	91.2	-	91.8	-	89.1	-	89.7	-
334.6	-	83.6	-	84.0	-	81.4	-	82.0	-
347.8	-	76.8	-	77.2	-	74.6	-	75.1	-
360.9	-	70.3	-	70.8	-	68.2	-	68.6	-
374.0	-	64.4	-	64.8	-	62.2	-	62.6	-
387.1	-	59.1	-	59.4	-	56.9	-	57.2	-
400.3	-	54.0	-	54.3	-	51.8	-	52.1	-
413.4	-	49.2	-	49.6	-	47.0	-	47.4	-
426.5	-	44.9	-	45.3	-	42.7	-	43.1	-
439.6	-	40.9	-	41.3	-	38.7	-	39.1	-
452.8	-	37.3	-	37.5	-	34.8	-	35.3	-
459.3	-	35.5	-	27.1	-	33.2	-	33.5	-
465.9	-	33.7	-	-	-	31.5	-	31.7	-
469.2	-	32.8	-	-	-	30.6	-	28.6	-
475.7	-	-	-	-	-	29.0	-	26.8	-
479.0	-	-	-	-	-	28.2	-	25.9	-
485.6	-	-	-	-	-	-	-	24.0	-
492.1	-	-	-	-	-	-	-	-	-
495.4	-	-	-	-	-	-	-	-	-
	0 lb	143,300 lb	275,600 lb	363,800 lb	452,000 lb	540,200 lb	628,400 lb	716,600 lb	

	0 lb	143,300 lb	275,600 lb	363,800 lb	452,000 lb	540,200 lb	628,400 lb	716,600 lb
--	------	------------	------------	------------	------------	------------	------------	------------



LSL+LF

SUPERLIFT 3800

363,800 lb + 110,200 lb ZB					27.6 ft					32.2 ft/s					360°					75%				
	472.4 ft															482.3 ft								
	LSL+LF_2					LSL+LF_3		LSL+LF_4		LSL+LF_2					LSL+LF_3		LSL+LF_4							
	12 m					24 m					36 m					12 m								
	0t-325t		0t-325t		0t-325t		0t-325t																	
	15°		20°		30°		15°		20°		15°		20°		15°		20°		15°		20°			
ft	1,000 lb																							
62.3	138.9	143.3	136.7	140.0	-	-	-	162.0	187.4	-	-	-	-	-	-	-	-	179.7	-	-	-			
65.6	138.9	143.3	135.6	140.0	-	-	165.3	162.0	187.4	184.1	-	-	-	-	-	-	-	158.7	155.4	178.6	177.5			
68.9	137.8	142.7	135.6	139.4	127.9	131.2	164.8	161.5	187.1	184.1	-	-	-	-	-	-	-	158.2	154.9	178.6	176.9			
72.2	137.8	142.2	135.6	138.9	127.9	131.2	164.2	160.9	186.8	184.1	-	-	-	-	-	-	-	157.6	154.3	178.6	176.4			
75.5	132.3	141.6	131.7	138.3	126.8	130.6	163.7	160.4	186.6	183.5	104.5	-	-	-	-	-	-	157.1	154.3	178.6	176.4			
78.7	127.9	141.1	130.1	137.8	126.8	130.1	163.1	159.8	186.3	183.0	104.1	-	-	-	-	-	-	156.5	154.3	178.6	176.4			
82.0	121.3	140.5	123.5	137.2	122.9	130.1	162.9	159.3	186.3	183.0	103.6	95.7	-	-	-	-	-	156.3	153.8	178.3	175.8			
85.3	114.6	140.0	116.8	136.7	121.3	130.1	162.6	158.7	186.3	183.0	103.2	95.5	-	-	-	-	-	156.0	153.2	178.0	175.3			
88.6	109.1	139.4	111.3	136.1	115.7	129.5	162.3	158.2	186.3	182.4	102.7	95.2	-	74.3	-	-	-	155.7	152.7	177.7	175.3			
91.9	103.6	138.9	105.8	135.6	110.2	129.0	162.0	157.6	186.3	181.9	102.3	95.0	76.7	74.1	-	-	-	155.4	152.1	177.5	175.3			
98.4	93.3	137.8	95.5	134.5	99.6	127.9	160.4	156.5	185.2	181.9	101.4	94.4	75.6	73.6	64.8	-	-	154.3	151.0	176.9	174.2			
111.5	76.5	134.8	78.6	132.3	82.2	125.7	157.6	154.3	183.0	179.7	99.6	93.2	73.1	72.6	64.2	-	-	152.1	148.8	175.3	172.7			
114.8	72.3	134.1	74.3	131.7	77.8	125.1	157.1	153.8	182.4	179.1	99.2	92.9	72.5	72.3	64.1	43.2	-	151.6	148.3	174.7	172.3			
124.7	61.8	132.3	63.6	129.7	66.8	123.8	155.4	152.1	181.1	177.8	97.9	91.9	70.7	71.4	63.3	42.0	-	149.9	146.6	173.4	171.2			
137.8	49.2	130.1	50.7	126.8	53.6	122.4	153.2	149.9	179.7	176.4	96.1	90.4	68.3	70.1	62.2	40.3	-	147.7	144.4	172.0	169.8			
150.9	39.2	127.1	40.6	124.6	43.1	119.4	149.5	146.2	176.7	173.4	94.4	88.9	66.1	68.6	60.0	38.9	-	145.5	142.2	170.5	167.6			
164.0	30.1	124.2	31.4	122.0	33.7	116.8	146.2	142.9	173.8	170.5	92.4	87.2	64.1	67.2	57.8	37.6	-	142.9	140.0	168.7	165.6			
177.2	22.0	121.3	23.1	119.0	25.4	114.6	143.3	140.0	170.9	167.6	90.2	85.1	62.2	65.7	55.8	36.4	-	140.0	137.8	166.4	163.1			
190.3	15.3																							



0 lb	143,300 lb	275,600 lb	363,800 lb	452,000 lb	540,200 lb	628,400 lb	716,600 lb
------	------------	------------	------------	------------	------------	------------	------------



LSL+LF

SUPERLIFT 3800

363,800 lb + 110,200 lb ZB		27.6 ft		32.2 ft/s		360°		75%									
492.1 ft		502.0 ft		511.8 ft		521.7 ft											
LSL+LF_4																	
12 m																	
0 t	0t-325t	0 t	0t-325t	0 t	0t-325t	0 t	0t-325t	0 t	0t-325t								
15°	20°	15°	20°	15°	20°	15°	20°	15°	20°								
1,000 lb																	
62.3	152.1	158.7	-	-	147.7	152.1	-	-	-								
65.6	145.5	157.6	147.7	154.3	142.2	152.1	142.2	148.8	137.8								
68.9	138.1	157.4	140.0	153.8	134.8	151.8	135.6	148.3	130.7								
72.2	130.6	157.1	132.3	153.2	127.3	151.6	129.0	147.7	123.6								
78.7	115.7	156.5	119.0	152.1	112.4	151.0	114.6	147.7	109.3								
85.3	104.3	155.4	106.5	152.1	101.1	149.9	103.2	146.6	98.0								
91.9	92.8	154.3	95.2	151.0	89.7	148.8	92.2	145.5	86.6								
98.4	83.4	153.2	85.3	149.9	80.5	147.7	82.2	144.4	77.4								
111.5	66.4	150.5	68.9	147.7	63.5	145.5	65.9	142.2	60.6								
124.7	52.5	147.7	54.4	145.1	49.7	143.3	51.6	140.4	47.0								
137.8	40.1	145.5	41.9	142.2	37.5	141.1	39.2	138.9	34.8								
150.9	30.4	142.6	31.9	140.0	27.8	138.9	29.4	136.0	25.3								
164.0	21.6	139.6	22.9	137.4	19.0	136.5	20.5	133.6	16.6								
173.9	15.7	137.4	17.0	135.2	13.2	134.5	14.6	132.3	10.8								
177.2	13.7	136.7	15.0	134.5	11.2	133.4	12.6	131.2	8.8								
180.4	12.0	136.0	13.3	133.4	9.5	132.8	10.8	130.6	-								
183.7	10.3	135.2	11.6	132.7	7.7	132.3	9.0	130.1	-								
187.0	8.6	134.5	9.9	132.1	-	131.7	-	129.5	-								
190.3	-	133.7	8.2	131.4	-	131.2	-	129.0	-								
203.4	-	130.8	-	128.6	-	128.6	-	126.4	-								
216.5	-	127.9	-	125.7	-	125.7	-	123.5	-								
229.7	-	123.1	-	121.6	-	122.4	-	120.2	-								
242.8	-	118.7	-	117.4	-	118.5	-	117.9	-								
255.9	-	115.7	-	113.5	-	115.7	-	113.5	-								
269.0	-	111.9	-	110.5	-	111.6	-	110.2	-								
282.2	-	109.0	-	107.6	-	108.7	-	108.0	-								
295.3	-	106.5	-	104.9	-	106.3	-	105.6	-								
308.4	-	103.5	-	102.1	-	104.1	-	102.7	-								
321.5	-	99.9	-	99.1	-	99.6	-	98.8	-								
334.6	-	95.0	-	95.5	-	92.8	-	93.3	-								
347.8	-	87.6	-	88.1	-	85.5	-	86.0	-								
360.9	-	80.8	-	81.4	-	78.8	-	79.2	-								
374.0	-	74.5	-	75.0	-	72.3	-	72.8	-								
387.1	-	68.8	-	69.2	-	66.6	-	67.0	-								
400.3	-	63.4	-	63.7	-	61.2	-	61.6	-								
413.4	-	58.4	-	58.6	-	56.2	-	56.4	-								
426.5	-	53.9	-	54.1	-	51.7	-	51.9	-								
439.6	-	49.6	-	49.8	-	47.4	-	47.6	-								
452.8	-	45.6	-	45.9	-	43.2	-	43.7	-								
459.3	-	43.7	-	35.3	-	41.4	-	41.8	-								
465.9	-	41.6	-	-	-	39.7	-	39.9	-								
469.2	-	40.6	-	-	-	38.8	-	38.8	-								
475.7	-	-	-	-	-	36.5	-	36.5	-								
479.0	-	-	-	-	-	35.1	-	35.1	-								
485.6	-	-	-	-	-	-	-	27.4	-								
492.1	-	-	-	-	-	-	-	24.3	-								
495.4	-	-	-	-	-	-	-	-	-								





0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb



LSL+LF_4


SUPERLIFT 3800

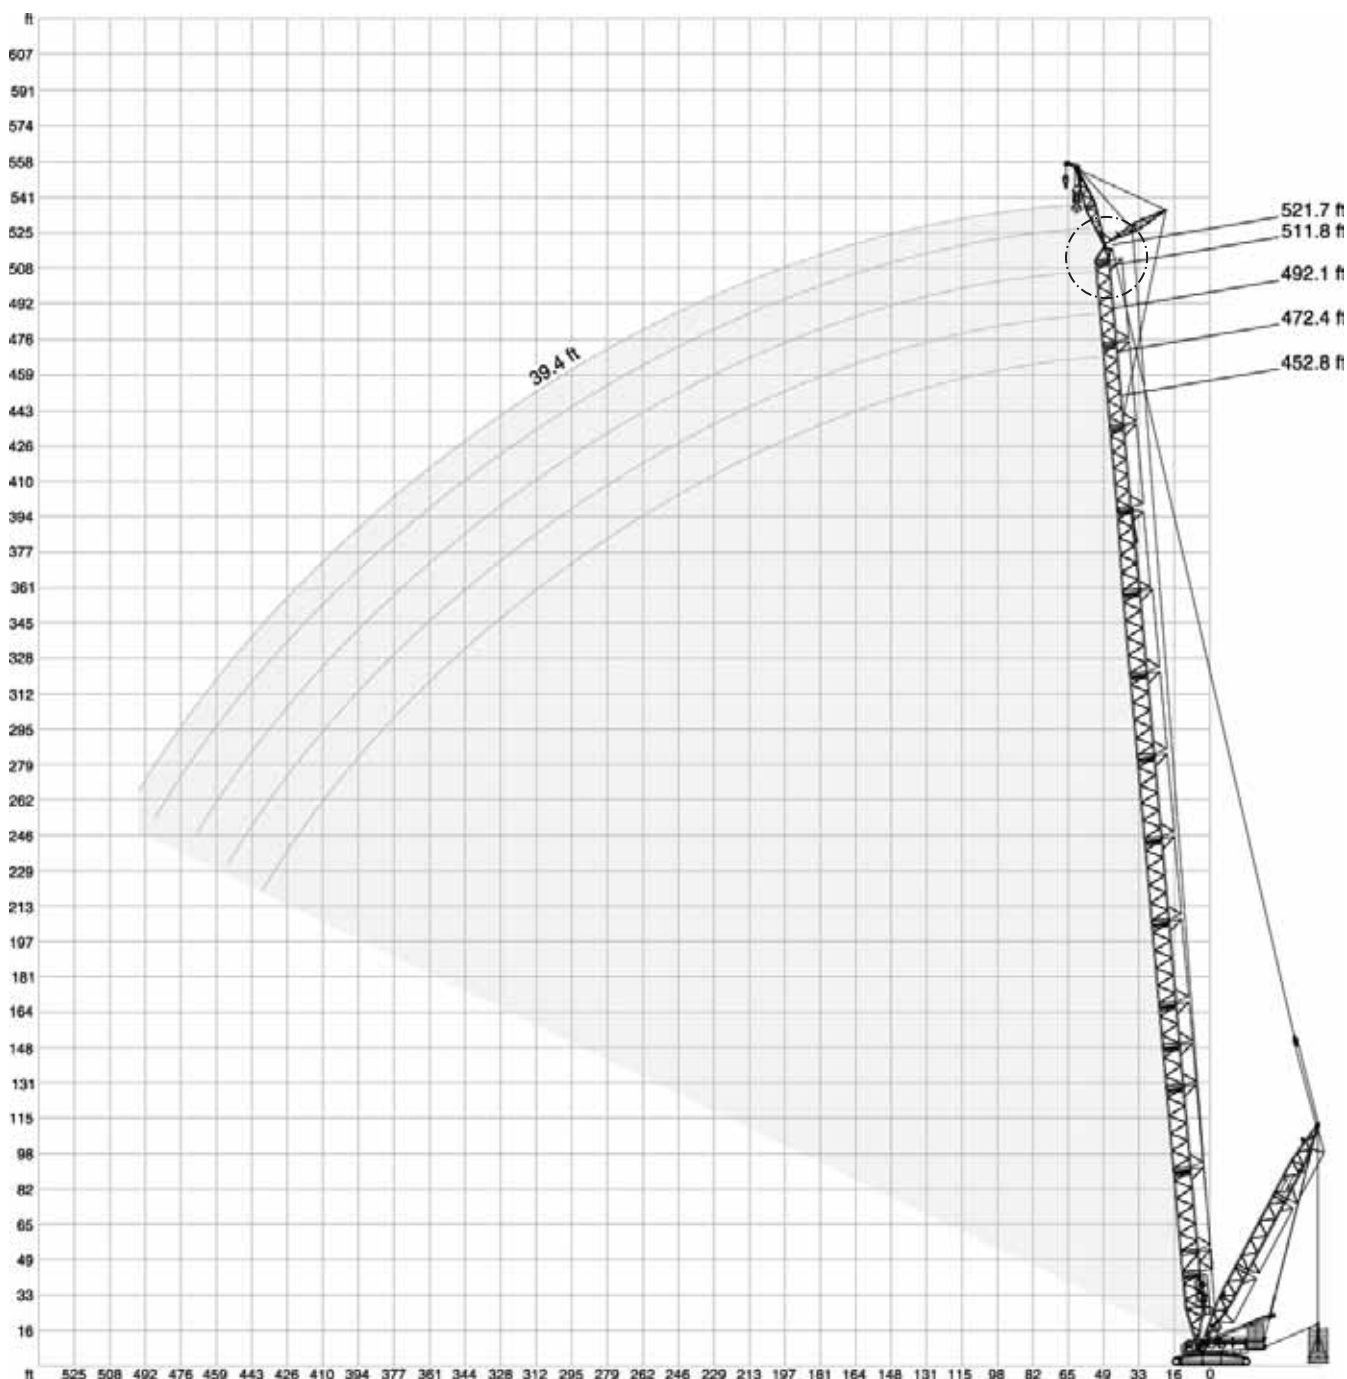

** Option

SW

SUPERLIFT 3800

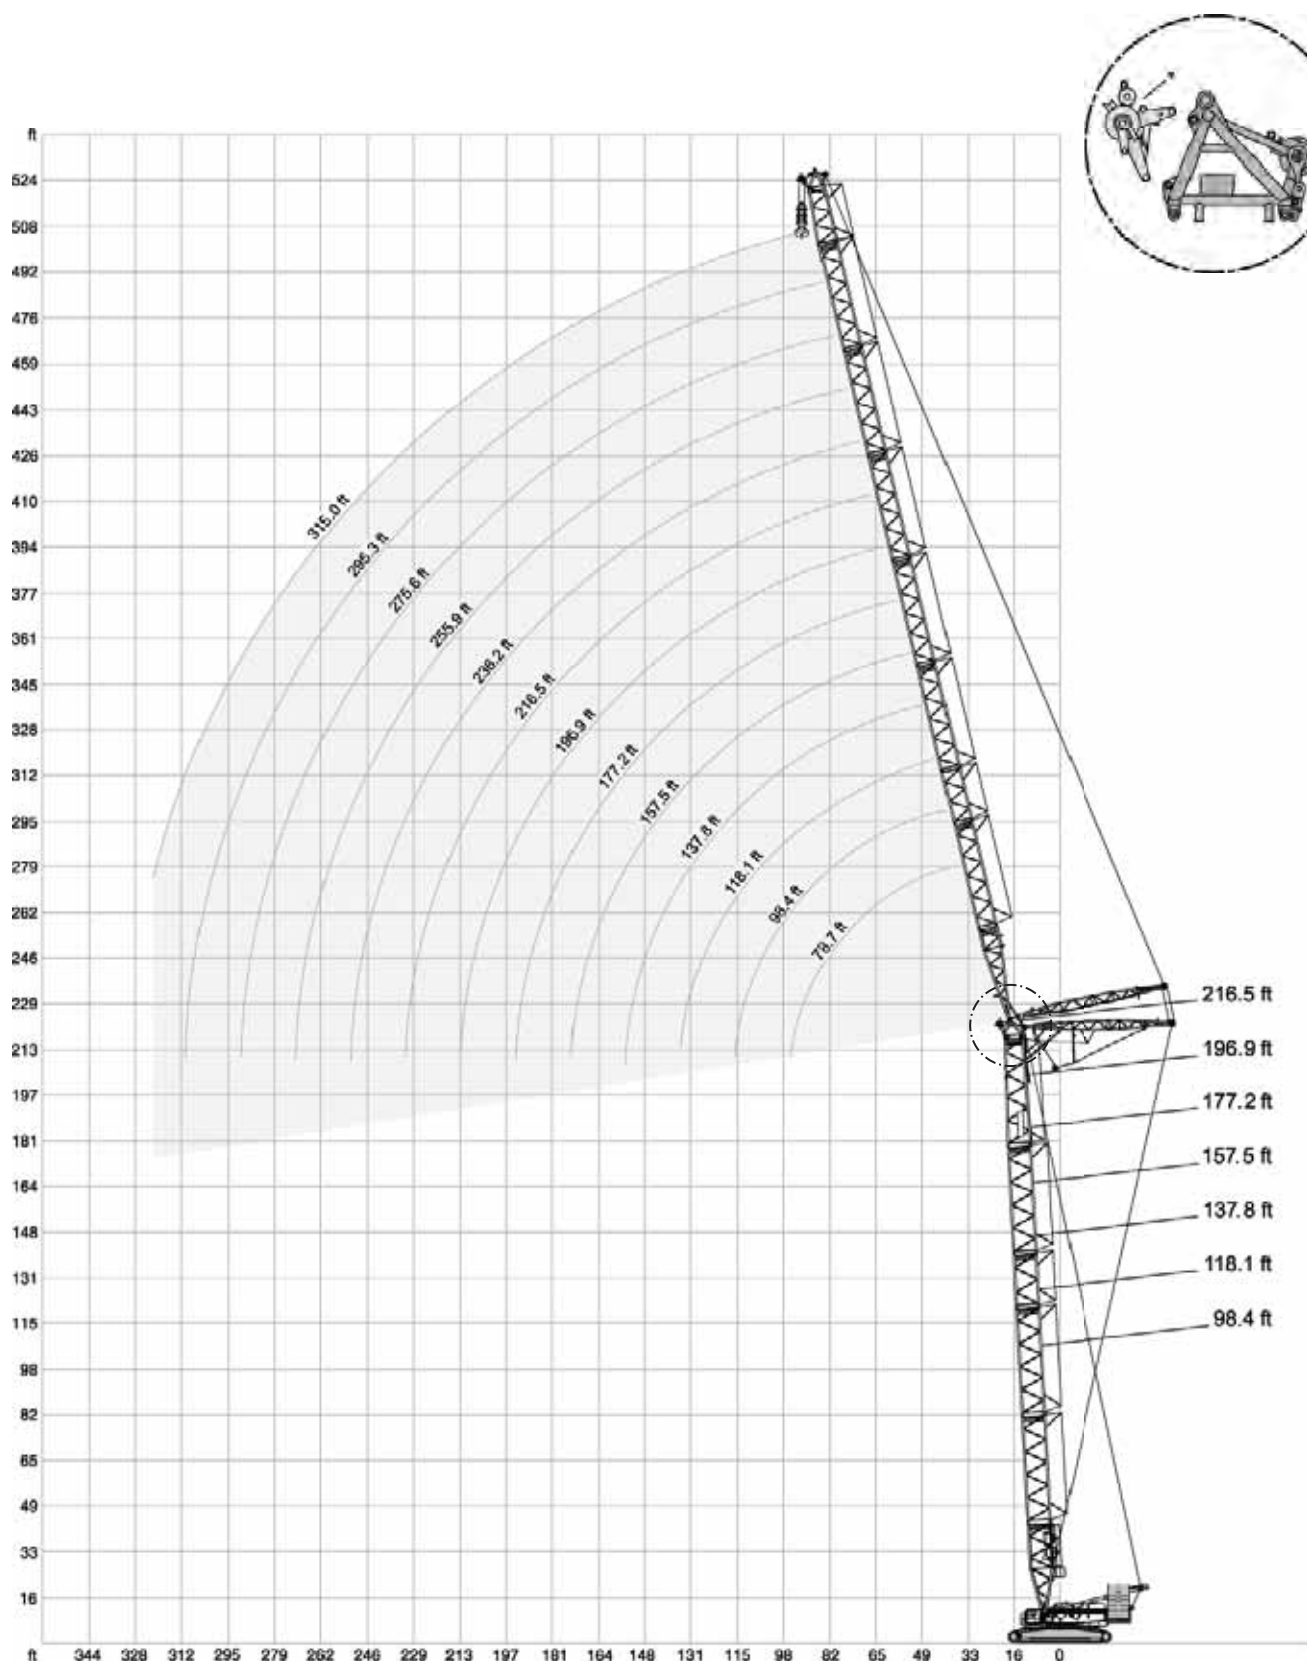

* Attachable



SW

SUPERLIFT 3800

 452,000 lb +  110,200 lb				 27.6 ft				 32.2 ft/s				360°		75%		
 118.1 ft																
		78.7 ft			98.4 ft			118.1 ft			137.8 ft			157.5 ft		
		SW_1														
		87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°
ft	1,000 lb															
36.1	597.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
39.4	549.0	-	-	524.7	-	-	-	-	-	-	-	-	-	-	-	
45.9	471.8	-	-	454.2	-	-	434.3	-	-	-	-	-	-	-	-	
49.2	440.9	-	-	423.3	-	-	407.9	-	-	392.4	-	-	-	-	-	
52.5	414.5	-	-	399.0	-	-	383.6	-	-	370.4	-	-	-	-	-	
55.8	390.2	-	-	374.8	-	-	361.6	-	-	348.3	-	-	335.1	-	-	
59.1	368.2	-	-	354.9	-	-	341.7	-	-	330.7	-	-	317.5	-	-	
65.6	328.5	-	-	319.7	-	-	308.6	-	-	297.6	-	-	286.6	-	-	
72.2	288.8	-	-	284.4	-	-	280.0	-	-	271.2	-	-	260.1	-	-	
75.5	272.3	242.5	-	269.0	-	-	265.7	-	-	260.1	-	-	249.1	-	-	
78.7	255.7	229.3	-	253.5	-	-	251.3	-	-	249.1	-	-	238.1	-	-	
85.3	229.3	207.2	-	227.1	203.9	-	227.1	-	-	224.9	-	-	220.5	-	-	
91.9	205.0*	187.4	-	207.2	184.1	-	205.0	181.9	-	203.9	-	-	201.7	-	-	
98.4	-	170.9	-	188.5	167.6	-	187.4	165.3	-	186.3	-	-	184.1	-	-	
101.7	-	164.2	-	181.1	161.2	-	180.2	159.0	-	179.1	156.5	-	176.6	-	-	
108.3	-	151.0	135.6	166.4	148.5	-	165.9	146.3	-	164.8	144.0	-	161.8	141.1	-	
111.5	-	144.4	131.2	157.6*	142.2	-	158.7	140.0	-	157.6	137.8	-	154.3	134.5	-	
114.8	-	138.9	126.5	-	137.2	-	153.2	135.0	-	152.1	132.8	-	148.8	129.5	-	
118.1	-	-	121.8	-	132.3	117.9	147.7	130.1	-	146.6	127.9	-	143.3	124.6	-	
124.7	-	-	112.4	-	122.4	109.6	136.7	120.2	-	135.6	117.9	-	132.3	114.6	-	
131.2	-	-	105.7	-	114.6	102.4	125.7*	112.5	99.6	126.8	110.7	-	124.0	107.4	-	
134.5	-	-	102.3	-	-	98.8	-	108.7	96.3	122.4	107.0	-	119.9	103.7	-	
137.8	-	-	-	-	-	95.5	-	104.9	93.0	117.9	103.4	-	115.7	100.1	-	
141.1	-	-	-	-	-	92.7	-	101.9	90.2	114.6	100.3	88.4	112.3	97.0	-	
150.9	-	-	-	-	-	84.4	-	92.8	81.8	103.0*	91.1	80.0	102.1	87.7	-	
154.2	-	-	-	-	-	-	-	-	79.5	-	88.6	77.7	99.3	85.2	73.2	
164.0	-	-	-	-	-	-	-	-	72.8	-	81.1	70.5	91.1	77.6	66.1	
170.6	-	-	-	-	-	-	-	-	68.8	-	76.9	66.6	84.0*	73.4	62.2	
177.2	-	-	-	-	-	-	-	-	-	-	-	62.6	-	69.2	58.2	
190.3	-	-	-	-	-	-	-	-	-	-	-	56.4	-	62.4	51.6	
203.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	46.1	
210.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	43.9	

* Main boom angle 85°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1

SW

SUPERLIFT 3800

452,000 lb +  110,200 lb				 27.6 ft			 32.2 ft/s			360°		75%	
 118.1 ft													
		255.9 ft			275.6 ft			295.3 ft			315.0 ft		
		SW_1											
		87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°
ft		1,000 lb											
75.5	186.3	-	-	-	-	-	-	-	-	-	-	-	-
78.7	185.2	-	-	-	-	-	-	-	-	-	-	-	-
82.0	184.1	-	-	-	157.6	-	-	-	-	-	-	-	-
85.3	183.0	-	-	-	156.5	-	-	134.5	-	-	-	-	-
88.6	178.0	-	-	-	155.4	-	-	133.4	-	-	115.7	-	-
91.9	173.1	-	-	-	154.3	-	-	132.3	-	-	114.6	-	-
98.4	160.9	-	-	-	153.2	-	-	131.2	-	-	113.5	-	-
111.5	140.0	-	-	-	134.5	-	-	129.0	-	-	111.3	-	-
124.7	122.4	-	-	-	117.9	-	-	113.5	-	-	108.7	-	-
137.8	108.9	-	-	-	104.1	-	-	100.3	-	-	95.5	-	-
150.9	95.5	79.4	-	-	92.6	-	-	88.8	-	-	84.2	-	-
160.8	86.9	71.6	-	-	84.3	67.9	-	81.4	-	-	77.1	-	-
164.0	84.0	69.0	-	-	81.6	65.7	-	78.9	-	-	74.7	-	-
167.3	81.6	66.6	-	-	79.1	63.4	-	76.8	60.2	-	72.6	-	-
177.2	74.3	60.0	-	-	71.9	56.7	-	70.5	54.7	-	66.4	50.3	-
190.3	65.9	52.2	-	-	63.5	48.9	-	62.4	47.4	-	59.1	44.1	-
203.4	58.9	45.6	-	-	56.2	42.3	-	54.9	40.8	-	52.7	38.4	-
210.0	55.7	42.8	32.4	-	52.9	39.6	-	51.6	37.9	-	49.5	35.6	-
216.5	52.5	39.9	30.0	-	49.8	36.8	-	48.3	35.1	-	46.3	32.8	-
219.8	51.0	38.6	28.8	-	48.4	35.5	25.4	46.8	33.8	-	44.9	31.6	-
229.7	47.0	35.1	25.6	-	44.1	31.7	22.0	42.5	30.2	-	40.6	27.8	-
232.9	45.7	34.0	24.6	-	42.8	30.6	21.1	41.3	29.1	19.2	39.2	26.7	-
242.8	41.9	30.6	21.6	-	39.0	27.3	18.3	37.5	25.8	16.3	35.3	23.4	13.9
255.9	37.5	26.7	18.3	-	34.6	23.6	14.8	32.8	21.8	13.0	30.9	19.4	10.4
262.5	33.7*	25.0	16.7	-	32.6	21.8	13.3	30.9	20.1	11.5	28.8	17.7	8.8
265.7	32.8*	24.2	15.9	-	31.6	20.9	12.6	29.9	19.2	10.7	27.7	16.9	-
269.0	-	23.4	15.2	-	30.6	20.1	11.9	28.9	18.3	9.9	26.7	16.1	-
272.3	-	22.6	14.6	-	29.8	19.3	11.2	28.0	17.5	9.3	25.8	15.3	-
282.2	-	20.3	12.6	-	25.4*	17.0	9.0	25.4	15.2	-	23.1	12.8	-
285.4	-	19.6	12.0	-	-	16.3	-	24.5	14.5	-	22.3	12.1	-
295.3	-	-	10.1	-	-	14.3	-	22.0	12.3	-	19.8	9.9	-
298.6	-	-	9.6	-	-	13.7	-	21.4	11.7	-	19.1	9.3	-
301.8	-	-	9.0	-	-	13.2	-	19.2*	11.1	-	18.4	-	-
305.1	-	-	-	-	-	12.6	-	-	10.5	-	17.7	-	-
308.4	-	-	-	-	-	-	-	-	9.9	-	17.0	-	-
311.7	-	-	-	-	-	-	-	-	9.3	-	16.2	-	-
321.5	-	-	-	-	-	-	-	-	-	-	12.8*	-	-

* Main boom angle 85°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1

SW

SUPERLIFT 3800

 452,000 lb +  110,200 lb				 27.6 ft				 32.2 ft/s				360°		75%		
 137.8 ft																
		78.7 ft			98.4 ft			118.1 ft			137.8 ft			157.5 ft		
		SW_1														
		87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°
ft		1,000 lb														
39.4		524.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-
42.7		485.0	-	-	465.2	-	-	-	-	-	-	-	-	-	-	-
45.9		451.9	-	-	434.3	-	-	416.7	-	-	-	-	-	-	-	-
49.2		423.3	-	-	407.9	-	-	390.2	-	-	377.0	-	-	-	-	-
52.5		399.0	-	-	383.6	-	-	368.2	-	-	354.9	-	-	-	-	-
55.8		374.8	-	-	361.6	-	-	348.3	-	-	335.1	-	-	321.9	-	-
59.1		354.9	-	-	341.7	-	-	328.5	-	-	319.7	-	-	306.4	-	-
65.6		319.7	-	-	308.6	-	-	297.6	-	-	288.8	-	-	277.8	-	-
72.2		286.6	-	-	282.2	-	-	271.2	-	-	262.4	-	-	251.3	-	-
78.7		253.5	-	-	251.3	-	-	249.1	-	-	240.3	-	-	231.5	-	-
82.0		241.4	211.6	-	239.2	-	-	237.0	-	-	231.5	-	-	222.7	-	-
85.3		229.3	200.6	-	227.1	-	-	224.9	-	-	222.7	-	-	213.8	-	-
91.9		203.9*	181.9	-	205.0	178.6	-	203.9	-	-	202.8	-	-	198.4	-	-
95.1		194.0*	173.6	-	196.2	170.3	-	195.1	-	-	194.0	-	-	190.7	-	-
98.4		-	165.3	-	187.4	162.0	-	186.3	159.8	-	185.2	-	-	183.0	-	-
108.3		-	146.3	-	165.3	143.0	-	164.8	140.8	-	163.7	138.9	-	160.7	-	-
111.5		-	140.0	-	155.4*	136.7	-	157.6	134.5	-	156.5	133.4	-	153.2	-	-
114.8		-	135.0	-	149.9*	132.0	-	152.1	129.8	-	151.0	128.4	-	148.0	124.6	-
118.1		-	130.1	113.5	-	127.3	-	146.6	125.1	-	145.5	123.5	-	142.7	119.8	-
124.7		-	-	106.0	-	117.9	-	135.6	115.7	-	134.5	113.5	-	132.3	110.2	-
128.0		-	-	102.7	-	114.3	98.8	131.2	112.0	-	130.3	110.0	-	127.9	106.6	-
131.2		-	-	99.3	-	110.6	95.5	123.5*	108.2	-	126.2	106.5	-	123.5	103.1	-
137.8		-	-	92.6	-	103.2	89.1	-	100.8	86.2	117.9	99.4	-	114.6	95.9	-
141.1		-	-	89.7	-	-	86.3	-	97.8	83.4	114.5	96.4	-	111.3	92.9	-
150.9		-	-	-	-	-	78.0	-	88.8	75.2	101.6*	87.3	73.2	101.2	83.8	-
157.5		-	-	-	-	-	73.6	-	84.0	70.7	-	82.5	68.6	95.7	78.9	-
160.8		-	-	-	-	-	71.4	-	-	68.4	-	80.0	66.2	92.9	76.5	61.7
164.0		-	-	-	-	-	-	-	-	66.1	-	77.6	63.9	90.2	74.1	59.5
170.6		-	-	-	-	-	-	-	-	62.5	-	73.6	60.2	82.7*	69.9	55.8
177.2		-	-	-	-	-	-	-	-	58.9	-	69.7	56.4	-	65.7	52.0
180.4		-	-	-	-	-	-	-	-	57.3	-	-	55.0	-	63.9	50.4
190.3		-	-	-	-	-	-	-	-	-	-	-	50.5	-	58.6	45.6
193.6		-	-	-	-	-	-	-	-	-	-	-	49.2	-	57.1	44.3
200.1		-	-	-	-	-	-	-	-	-	-	-	46.7	-	-	41.7
203.4		-	-	-	-	-	-	-	-	-	-	-	-	-	-	40.6
216.5		-	-	-	-	-	-	-	-	-	-	-	-	-	-	36.2

* Main boom angle 85°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SW

SUPERLIFT 3800

 **452,000 lb +  110,200 lb**  **27.6 ft**  **32.2 ft/s** **360°** **75%**

 **137.8 ft**

	255.9 ft			275.6 ft			295.3 ft			315.0 ft		
	SW_1											
	87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°
ft	1,000 lb											
78.7	177.5	-	-	-	-	-	-	-	-	-	-	-
82.0	176.4	-	-	151.0	-	-	-	-	-	-	-	-
85.3	175.3	-	-	149.9	-	-	129.0	-	-	-	-	-
91.9	167.6	-	-	148.8	-	-	127.9	-	-	110.2	-	-
98.4	155.4	-	-	146.6	-	-	125.7	-	-	109.6	-	-
111.5	135.6	-	-	130.1	-	-	123.5	-	-	107.4	-	-
124.7	119.0	-	-	113.5	-	-	110.0	-	-	104.9	-	-
137.8	105.6	-	-	100.8	-	-	96.8	-	-	92.2	-	-
150.9	94.1	-	-	89.5	-	-	85.8	-	-	81.4	-	-
157.5	88.8	68.6	-	84.7	-	-	81.0	-	-	76.7	-	-
164.0	83.3	64.6	-	79.8	60.0	-	76.3	-	-	72.1	-	-
173.9	76.1	58.3	-	73.4	54.5	-	70.2	50.9	-	66.0	-	-
177.2	73.6	56.2	-	71.2	52.7	-	68.1	49.4	-	63.9	-	-
180.4	71.6	54.3	-	69.2	50.9	-	66.3	47.8	-	62.2	43.2	-
190.3	65.5	48.7	-	63.1	45.4	-	60.8	43.2	-	56.9	38.8	-
203.4	58.4	42.3	-	55.8	39.0	-	54.2	37.5	-	50.5	33.5	-
216.5	52.0	36.8	24.7	49.2	33.5	-	47.8	32.0	-	45.0	28.9	-
229.7	46.3	32.0	20.7	43.4	28.9	17.2	42.1	27.1	-	39.9	24.7	-
239.5	42.7	28.8	18.1	39.6	25.6	14.6	38.3	24.0	12.6	36.1	21.6	-
242.8	41.4	27.8	17.2	38.4	24.5	13.7	37.0	22.9	11.7	34.8	20.5	-
252.6	38.1	25.0	14.7	35.1	21.8	11.2	33.6	20.1	9.3	31.5	17.7	-
255.9	37.0	24.0	13.9	34.0	20.9	10.4	32.4	19.2	-	30.4	16.8	-
262.5	35.1	22.4	12.5	32.1	19.2	9.0	30.4	17.5	-	28.3	15.1	-
265.7	32.0*	21.6	11.7	31.1	18.3	-	29.4	16.7	-	27.3	14.3	-
269.0	-	20.7	11.0	30.2	17.4	-	28.4	15.9	-	26.2	13.4	-
278.9	-	18.6	9.0	27.6	15.2	-	25.8	13.6	-	23.6	11.1	-
282.2	-	17.9	-	24.7*	14.6	-	24.9	12.8	-	22.7	10.4	-
285.4	-	17.2	-	23.8*	13.9	-	24.1	12.1	-	21.9	9.7	-
288.7	-	16.5	-	-	13.2	-	23.3	11.5	-	21.1	9.0	-
295.3	-	-	-	-	11.9	-	21.6	10.1	-	19.4	-	-
301.8	-	-	-	-	10.8	-	18.3*	8.8	-	18.0	-	-
305.1	-	-	-	-	10.3	-	17.6*	-	-	17.3	-	-
308.4	-	-	-	-	9.7	-	-	-	-	16.5	-	-
321.5	-	-	-	-	-	-	-	-	-	11.9*	-	-

* Main boom angle 85°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SW

SUPERLIFT 3800

 452,000 lb +  110,200 lb				 27.6 ft				 32.2 ft/s				360°		75%		
 157.5 ft																
		78.7 ft			98.4 ft			118.1 ft			137.8 ft			157.5 ft		
		SW_1														
		87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°
ft 1,000 lb																
39.4	498.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
42.7	463.0	-	-	445.3	-	-	-	-	-	-	-	-	-	-	-	
45.9	434.3	-	-	416.7	-	-	399.0	-	-	-	-	-	-	-	-	
52.5	381.4	-	-	368.2	-	-	354.9	-	-	341.7	-	-	-	-	-	
55.8	361.6	-	-	348.3	-	-	335.1	-	-	324.1	-	-	310.9	-	-	
59.1	341.7	-	-	328.5	-	-	317.5	-	-	306.4	-	-	295.4	-	-	
65.6	308.6	-	-	297.6	-	-	286.6	-	-	277.8	-	-	266.8	-	-	
72.2	282.2	-	-	271.2	-	-	262.4	-	-	253.5	-	-	244.7	-	-	
78.7	253.5	-	-	249.1	-	-	240.3	-	-	233.7	-	-	224.9	-	-	
85.3	227.1	-	-	224.9	-	-	222.7	-	-	216.1	-	-	207.2	-	-	
88.6	216.6	184.1	-	214.4	-	-	212.7	-	-	208.3	-	-	199.5	-	-	
91.9	206.1	175.3	-	203.9	-	-	202.8	-	-	200.6	-	-	191.8	-	-	
95.1	191.8*	167.6	-	195.1	163.1	-	194.0	-	-	192.4	-	-	185.2	-	-	
98.4	-	159.8	-	186.3	155.4	-	185.2	-	-	184.1	-	-	178.6	-	-	
105.0	-	147.2	-	172.0	143.3	-	170.9	141.1	-	169.8	-	-	165.3	-	-	
111.5	-	134.5	-	157.6	131.2	-	156.5	129.0	-	155.4	127.9	-	152.1	-	-	
114.8	-	129.8	-	147.7*	126.5	-	151.0	124.3	-	149.9	123.3	-	146.9	-	-	
121.4	-	120.4	-	-	117.1	-	140.0	114.9	-	138.9	114.1	-	136.4	110.2	-	
124.7	-	115.7	98.3	-	112.4	-	134.5	110.2	-	133.4	109.6	-	131.2	106.0	-	
134.5	-	-	88.2	-	102.0	-	117.9*	99.8	-	121.0	98.3	-	117.9	95.1	-	
137.8	-	-	84.9	-	98.5	80.7	-	96.3	-	116.8	95.0	-	113.5	91.5	-	
144.4	-	-	79.8	-	92.6	75.4	-	90.5	-	110.1	89.1	-	106.9	85.6	-	
147.6	-	-	77.3	-	-	72.8	-	87.6	69.9	106.7	86.1	-	103.6	82.7	-	
150.9	-	-	74.7	-	-	70.3	-	84.7	67.5	100.1*	83.1	-	100.3	79.8	-	
154.2	-	-	-	-	-	68.2	-	82.3	65.3	97.2*	80.7	-	97.6	77.3	-	
160.8	-	-	-	-	-	64.0	-	77.6	61.0	-	76.0	58.9	92.0	72.2	-	
164.0	-	-	-	-	-	61.9	-	-	58.9	-	73.6	56.9	89.3	69.7	-	
167.3	-	-	-	-	-	60.2	-	-	57.2	-	71.7	55.1	86.9	67.6	-	
170.6	-	-	-	-	-	-	-	-	55.4	-	69.7	53.4	81.4*	65.6	48.7	
173.9	-	-	-	-	-	-	-	-	53.7	-	67.7	51.6	79.1*	63.5	47.1	
177.2	-	-	-	-	-	-	-	-	52.0	-	65.7	49.8	-	61.5	45.4	
180.4	-	-	-	-	-	-	-	-	50.6	-	63.9	48.4	-	59.7	43.9	
187.0	-	-	-	-	-	-	-	-	47.8	-	-	45.5	-	56.2	41.0	
190.3	-	-	-	-	-	-	-	-	-	-	-	44.1	-	54.5	39.5	
200.1	-	-	-	-	-	-	-	-	-	-	-	40.4	-	50.3	35.7	
203.4	-	-	-	-	-	-	-	-	-	-	-	39.2	-	-	34.4	
206.7	-	-	-	-	-	-	-	-	-	-	-	38.4	-	-	33.4	
216.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	30.4	
226.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	28.0	

* Main boom angle 85°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SW

SUPERLIFT 3800

 452,000 lb +  110,200 lb				 27.6 ft			 32.2 ft/s			360°		75%		
 157.5 ft														
		177.2 ft			196.9 ft			216.5 ft			236.2 ft			
		SW_1												
		87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°	
ft	1,000 lb													
62.3	271.2	-	-	-	-	-	-	-	-	-	-	-	-	-
65.6	257.9	-	-	249.1	-	-	-	-	-	-	-	-	-	-
68.9	246.9	-	-	238.1	-	-	224.9	-	-	-	-	-	-	-
72.2	235.9	-	-	227.1	-	-	220.5	-	-	-	-	-	-	-
75.5	226.5	-	-	218.3	-	-	211.6	-	-	-	195.1	-	-	-
78.7	217.2	-	-	209.4	-	-	202.8	-	-	-	194.0	-	-	-
85.3	200.6	-	-	194.0	-	-	187.4	-	-	-	180.8	-	-	-
91.9	186.3	-	-	179.7	-	-	174.2	-	-	-	167.6	-	-	-
98.4	173.1	-	-	167.6	-	-	162.0	-	-	-	155.4	-	-	-
111.5	152.1	-	-	146.6	-	-	141.1	-	-	-	135.6	-	-	-
124.7	131.2	-	-	129.0	-	-	124.6	-	-	-	119.0	-	-	-
128.0	126.8	101.6	-	124.6	-	-	121.0	-	-	-	115.9	-	-	-
137.8	113.5	91.1	-	111.3	88.6	-	110.2	-	-	-	106.5	-	-	-
144.4	106.8	85.1	-	104.7	82.6	-	103.6	80.2	-	-	100.8	-	-	-
150.9	100.1	79.1	-	98.1	76.5	-	97.0	74.5	-	-	95.0	-	-	-
154.2	97.2	76.7	-	95.3	74.0	-	94.1	71.9	-	-	92.3	68.3	-	-
164.0	88.6	69.2	-	86.9	66.4	-	85.5	64.4	-	-	84.2	62.4	-	-
177.2	79.4	60.6	-	77.2	58.0	-	75.8	56.0	-	-	74.5	54.0	-	-
180.4	77.4	58.9	43.0	75.1	56.2	-	73.9	54.2	-	-	72.5	52.2	-	-
190.3	68.6*	53.6	38.6	69.2	50.9	-	67.9	48.9	-	-	66.4	47.0	-	-
193.6	-	52.1	37.3	67.5	49.4	34.2	66.1	47.4	-	-	64.6	45.3	-	-
203.4	-	47.6	33.5	62.4	44.8	30.4	60.8	42.8	28.2	-	59.3	40.8	-	-
210.0	-	45.1	31.3	56.9*	42.2	28.2	57.9	40.1	26.0	-	56.2	38.1	-	-
216.5	-	42.5	29.1	-	39.7	26.0	54.9	37.7	23.8	-	53.1	35.5	21.4	-
219.8	-	41.4	28.1	-	38.4	25.1	53.7	36.5	22.9	-	51.7	34.3	20.4	-
229.7	-	-	25.4	-	35.3	22.3	47.0*	33.1	20.1	-	47.6	30.9	17.6	-
239.5	-	-	23.0	-	32.4	19.8	-	30.1	17.6	-	44.0	27.9	15.1	-
242.8	-	-	22.3	-	-	19.0	-	29.1	16.8	-	42.8	26.9	14.3	-
246.1	-	-	21.6	-	-	18.3	-	28.3	16.0	-	39.0*	25.9	13.6	-
249.3	-	-	-	-	-	17.6	-	27.4	15.3	-	37.9*	24.9	12.9	-
255.9	-	-	-	-	-	16.3	-	25.8	13.9	-	-	23.4	11.5	-
262.5	-	-	-	-	-	15.0	-	-	12.7	-	-	21.8	10.1	-
265.7	-	-	-	-	-	-	-	-	12.1	-	-	21.1	9.5	-
269.0	-	-	-	-	-	-	-	-	11.5	-	-	20.3	-	-
275.6	-	-	-	-	-	-	-	-	10.4	-	-	18.7	-	-
282.2	-	-	-	-	-	-	-	-	9.3	-	-	-	-	-

* Main boom angle 85°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SW

SUPERLIFT 3800

452,000 lb +  110,200 lb				 27.6 ft			 32.2 ft/s			360°		75%	
 157.5 ft													
		255.9 ft			275.6 ft			295.3 ft			315.0 ft		
		SW_1											
		87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°
ft	1,000 lb												
78.7	166.4	-	-	-	-	-	-	-	-	-	-	-	
82.0	165.9	-	-	142.2	-	-	-	-	-	-	-	-	
85.3	165.3	-	-	141.1	-	-	-	-	-	-	-	-	
88.6	163.7	-	-	140.5	-	-	121.3	-	-	-	-	-	
91.9	162.0	-	-	140.0	-	-	120.2	-	-	104.3	-	-	
98.4	149.9	-	-	138.9	-	-	119.0	-	-	103.4	-	-	
111.5	131.2	-	-	125.7	-	-	116.8	-	-	101.4	-	-	
124.7	114.6	-	-	110.2	-	-	106.0	-	-	99.2	-	-	
137.8	102.3	-	-	97.4	-	-	93.5	-	-	88.8	-	-	
150.9	91.1	-	-	86.4	-	-	82.7	-	-	78.3	-	-	
164.0	81.6	58.4	-	77.2	-	-	73.6	-	-	69.2	-	-	
170.6	77.4	55.1	-	73.1	50.3	-	69.6	-	-	65.3	-	-	
177.2	73.2	51.8	-	69.0	47.2	-	65.5	-	-	61.3	-	-	
180.4	71.2	50.0	-	67.2	45.7	-	63.7	42.1	-	59.6	-	-	
187.0	67.1	46.5	-	63.7	42.7	-	60.3	39.3	-	56.2	34.8	-	
190.3	65.0	45.0	-	61.9	41.2	-	58.6	37.9	-	54.5	33.5	-	
203.4	58.0	38.8	-	55.1	35.5	-	52.5	32.8	-	48.5	28.7	-	
216.5	51.4	33.5	-	48.5	30.2	-	47.0	28.4	-	43.0	24.3	-	
226.4	47.2	30.0	16.3	44.4	26.7	-	42.8	25.0	-	39.3	21.3	-	
229.7	45.9	28.9	15.4	43.0	25.6	-	41.4	23.8	-	38.1	20.3	-	
242.8	40.8	24.9	12.1	37.9	21.6	-	36.4	19.8	-	33.7	16.8	-	
255.9	36.4	21.2	9.3	33.5	17.9	-	32.0	16.3	-	29.8	13.4	-	
269.0	30.2*	18.1	-	29.5	14.8	-	28.0	13.0	-	25.8	10.6	-	
275.6	-	16.6	-	27.9	13.3	-	26.2	11.6	-	24.0	9.3	-	
282.2	-	15.2	-	26.2	11.9	-	24.5	10.1	-	22.3	-	-	
285.4	-	14.6	-	22.9*	11.2	-	23.6	9.5	-	21.4	-	-	
295.3	-	12.8	-	-	9.3	-	21.2	-	-	19.0	-	-	
305.1	-	-	-	-	-	-	16.8*	-	-	16.8	-	-	
308.4	-	-	-	-	-	-	-	-	-	16.1	-	-	
321.5	-	-	-	-	-	-	-	-	-	11.2*	-	-	
324.8	-	-	-	-	-	-	-	-	-	10.6*	-	-	

* Main boom angle 85°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1

SW

SUPERLIFT 3800

 452,000 lb +  110,200 lb				 27.6 ft				 32.2 ft/s				360°		75%		
 177.2 ft																
		78.7 ft			98.4 ft			118.1 ft			137.8 ft			157.5 ft		
		SW_1														
		87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°
ft		1,000 lb														
39.4	476.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
45.9	414.5	-	-	-	399.0	-	-	-	-	-	-	-	-	-	-	-
49.2	390.2	-	-	-	374.8	-	-	359.4	-	-	-	-	-	-	-	-
52.5	368.2	-	-	-	352.7	-	-	339.5	-	-	328.5	-	-	-	-	-
55.8	348.3	-	-	-	335.1	-	-	321.9	-	-	310.9	-	-	297.6	-	-
59.1	328.5	-	-	-	317.5	-	-	306.4	-	-	295.4	-	-	284.4	-	-
65.6	297.6	-	-	-	286.6	-	-	277.8	-	-	269.0	-	-	257.9	-	-
72.2	273.4	-	-	-	262.4	-	-	253.5	-	-	244.7	-	-	235.9	-	-
78.7	251.3	-	-	-	242.5	-	-	233.7	-	-	224.9	-	-	217.2	-	-
85.3	224.9	-	-	-	222.7	-	-	216.1	-	-	209.4	-	-	200.6	-	-
91.9	205.0	-	-	-	202.8	-	-	200.6	-	-	194.0	-	-	186.3	-	-
95.1	190.1*	159.8	-	-	194.0	-	-	192.4	-	-	187.9	-	-	179.7	-	-
98.4	181.9*	153.2	-	-	185.2	-	-	184.1	-	-	181.9	-	-	173.1	-	-
101.7	-	147.2	-	-	178.0	143.3	-	176.9	-	-	175.0	-	-	167.6	-	-
111.5	-	129.0	-	-	156.5	125.7	-	155.4	123.5	-	154.3	-	-	151.0	-	-
118.1	-	119.6	-	-	140.0*	116.7	-	144.4	114.5	-	143.3	112.4	-	140.5	-	-
124.7	-	110.2	-	-	-	107.8	-	133.4	105.8	-	132.3	104.5	-	130.1	-	-
128.0	-	107.4	-	-	-	103.8	-	129.0	102.3	-	128.1	101.0	-	125.7	97.0	-
134.5	-	-	79.4	-	-	97.1	-	116.6*	95.2	-	119.9	93.9	-	116.8	89.9	-
137.8	-	-	76.5	-	-	93.7	-	112.4*	91.7	-	115.7	90.4	-	112.4	86.4	-
147.6	-	-	69.1	-	-	85.3	64.4	-	83.3	-	105.6	81.6	-	102.7	77.7	-
150.9	-	-	66.6	-	-	-	62.2	-	80.5	-	98.3*	78.7	-	99.4	74.7	-
154.2	-	-	64.6	-	-	-	60.2	-	78.1	-	95.7*	76.3	-	96.7	72.2	-
157.5	-	-	62.6	-	-	-	58.3	-	75.7	55.3	-	74.0	-	93.9	69.7	-
164.0	-	-	-	-	-	-	54.5	-	71.0	51.6	-	69.2	-	88.4	65.0	-
167.3	-	-	-	-	-	-	52.9	-	69.0	49.8	-	67.2	47.8	86.0	63.1	-
173.9	-	-	-	-	-	-	49.8	-	-	46.5	-	63.3	44.6	77.8*	59.1	-
177.2	-	-	-	-	-	-	48.3	-	-	45.0	-	61.3	43.0	-	57.1	-
180.4	-	-	-	-	-	-	-	-	-	43.7	-	59.7	41.6	-	55.4	37.0
187.0	-	-	-	-	-	-	-	-	-	41.0	-	56.4	38.9	-	52.1	34.2
190.3	-	-	-	-	-	-	-	-	-	39.7	-	-	37.5	-	50.5	32.8
196.9	-	-	-	-	-	-	-	-	-	37.7	-	-	35.3	-	47.7	30.6
203.4	-	-	-	-	-	-	-	-	-	-	-	-	33.1	-	45.0	28.4
216.5	-	-	-	-	-	-	-	-	-	-	-	-	29.5	-	-	24.5
229.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	21.4
232.9	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	20.7

* Main boom angle 85°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SW

SUPERLIFT 3800

452,000 lb +  110,200 lb				 27.6 ft			 32.2 ft/s			360°		75%	
 177.2 ft													
 ft		177.2 ft			196.9 ft			216.5 ft			236.2 ft		
		SW_1											
		87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°
1,000 lb													
62.3	260.1	-	-	-	-	-	-	-	-	-	-	-	
65.6	249.1	-	-	240.3	-	-	-	-	-	-	-	-	
72.2	227.1	-	-	220.5	-	-	208.3	-	-	-	-	-	
75.5	218.3	-	-	211.6	-	-	202.3	-	-	181.9	-	-	
78.7	209.4	-	-	202.8	-	-	196.2	-	-	179.7	-	-	
85.3	194.0	-	-	187.4	-	-	180.8	-	-	174.2	-	-	
91.9	179.7	-	-	173.1	-	-	167.6	-	-	162.0	-	-	
98.4	167.6	-	-	162.0	-	-	156.5	-	-	149.9	-	-	
111.5	146.6	-	-	141.1	-	-	136.7	-	-	131.2	-	-	
124.7	130.1	-	-	124.6	-	-	121.3	-	-	115.7	-	-	
134.5	116.8	89.5	-	114.6	-	-	111.2	-	-	106.2	-	-	
137.8	112.4	86.2	-	111.3	-	-	107.8	-	-	103.0	-	-	
144.4	105.8	80.2	-	104.4	77.2	-	102.0	-	-	97.4	-	-	
150.9	99.2	74.3	-	97.4	71.4	-	96.1	68.8	-	91.9	-	-	
160.8	90.8	66.8	-	88.8	64.2	-	87.5	62.0	-	84.8	58.0	-	
164.0	88.0	64.6	-	86.0	61.7	-	84.7	59.7	-	82.5	56.2	-	
177.2	78.5	56.4	-	76.5	53.8	-	75.2	51.8	-	73.9	49.8	-	
190.3	67.5*	49.6	32.2	68.6	47.0	-	67.0	45.0	-	65.7	43.0	-	
193.6	65.7*	48.2	31.0	66.9	45.5	-	65.3	43.4	-	64.0	41.5	-	
203.4	-	43.9	27.6	61.7	41.0	24.5	60.2	39.0	-	58.9	37.0	-	
213.3	-	40.2	24.6	54.2*	37.4	21.3	55.9	35.2	19.2	54.0	33.2	-	
216.5	-	39.0	23.6	-	36.2	20.3	54.5	34.0	18.1	52.5	32.0	-	
223.1	-	36.8	21.8	-	34.0	18.6	51.7	31.9	16.4	49.7	29.8	13.9	
229.7	-	-	20.1	-	31.7	17.0	45.6*	29.8	14.8	47.0	27.6	12.3	
232.9	-	-	19.3	-	30.9	16.2	44.5*	28.8	14.0	45.7	26.6	11.6	
242.8	-	-	17.2	-	28.2	13.9	-	26.0	11.7	42.1	23.6	9.3	
249.3	-	-	15.9	-	-	12.6	-	24.3	10.4	36.8*	21.9	-	
252.6	-	-	15.2	-	-	11.9	-	23.5	9.7	-	21.1	-	
255.9	-	-	-	-	-	11.2	-	22.7	9.0	-	20.3	-	
262.5	-	-	-	-	-	10.3	-	21.2	-	-	18.7	-	
269.0	-	-	-	-	-	9.3	-	-	-	-	17.2	-	
282.2	-	-	-	-	-	-	-	-	-	-	14.8	-	

* Main boom angle 85°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SW

SUPERLIFT 3800

 452,000 lb +  110,200 lb				 27.6 ft			 32.2 ft/s			360°		75%	
 177.2 ft													
		255.9 ft			275.6 ft			295.3 ft			315.0 ft		
		SW_1											
		87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°
ft	1,000 lb												
78.7	153.2	-	-	-	-	-	-	-	-	-	-	-	
85.3	152.1	-	-	132.3	-	-	-	-	-	-	-	-	
88.6	151.0	-	-	131.7	-	-	113.5	-	-	-	-	-	
91.9	149.9	-	-	131.2	-	-	112.4	-	-	97.7	-	-	
98.4	144.4	-	-	130.1	-	-	111.3	-	-	96.8	-	-	
111.5	126.8	-	-	121.3	-	-	110.0	-	-	95.0	-	-	
124.7	111.3	-	-	106.3	-	-	102.3	-	-	93.0	-	-	
137.8	98.8	-	-	93.9	-	-	89.9	-	-	85.3	-	-	
150.9	88.0	-	-	83.3	-	-	79.6	-	-	75.2	-	-	
164.0	78.7	-	-	74.3	-	-	70.8	-	-	66.4	-	-	
167.3	76.7	50.7	-	72.3	-	-	68.8	-	-	64.5	-	-	
177.2	70.8	46.1	-	66.4	41.4	-	63.1	-	-	58.9	-	-	
183.7	67.2	43.2	-	62.8	38.7	-	59.6	35.1	-	55.4	-	-	
190.3	63.7	40.3	-	59.5	35.9	-	56.2	32.4	-	52.0	-	-	
193.6	62.2	39.0	-	58.0	34.7	-	54.7	31.3	-	50.5	26.9	-	
203.4	57.3	35.1	-	53.4	31.1	-	50.3	27.8	-	46.1	23.6	-	
216.5	50.7	30.0	-	47.8	26.7	-	44.8	23.6	-	41.0	19.4	-	
229.7	45.2	25.6	-	42.3	22.3	-	40.1	19.8	-	36.2	15.7	-	
242.8	40.1	21.6	-	37.3	18.3	-	35.7	16.5	-	32.0	12.3	-	
255.9	35.9	18.3	-	32.8	15.0	-	31.3	13.2	-	28.0	9.5	-	
269.0	29.1*	15.2	-	28.9	11.9	-	27.3	10.1	-	24.7	-	-	
272.3	-	14.6	-	28.1	11.2	-	26.5	9.5	-	23.9	-	-	
282.2	-	12.6	-	25.6	9.0	-	23.8	-	-	21.4	-	-	
288.7	-	11.4	-	21.4*	-	-	22.3	-	-	20.0	-	-	
295.3	-	10.1	-	-	-	-	20.7	-	-	18.5	-	-	
298.6	-	9.5	-	-	-	-	20.0	-	-	17.8	-	-	
308.4	-	-	-	-	-	-	15.4*	-	-	15.7	-	-	
321.5	-	-	-	-	-	-	-	-	-	13.0	-	-	
324.8	-	-	-	-	-	-	-	-	-	9.9*	-	-	

* Main boom angle 85°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SW**SUPERLIFT 3800**

 452,000 lb +  110,200 lb				 27.6 ft				 32.2 ft/s				360°		75%		
 196.9 ft																
		78.7 ft			98.4 ft			118.1 ft			137.8 ft			157.5 ft		
		SW_1														
		87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°
ft		1,000 lb														
42.7	423.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
45.9	396.8	-	-	-	381.4	-	-	-	-	-	-	-	-	-	-	-
49.2	372.6	-	-	-	359.4	-	-	343.9	-	-	-	-	-	-	-	-
52.5	352.7	-	-	-	339.5	-	-	326.3	-	-	-	-	-	-	-	-
55.8	332.9	-	-	-	321.9	-	-	308.6	-	-	299.8	-	-	-	-	-
59.1	317.5	-	-	-	304.2	-	-	293.2	-	-	284.4	-	-	271.2	-	-
65.6	286.6	-	-	-	277.8	-	-	266.8	-	-	257.9	-	-	246.9	-	-
72.2	262.4	-	-	-	253.5	-	-	244.7	-	-	235.9	-	-	227.1	-	-
78.7	242.5	-	-	-	233.7	-	-	224.9	-	-	218.3	-	-	209.4	-	-
85.3	224.9	-	-	-	217.2	-	-	208.3	-	-	201.7	-	-	194.0	-	-
91.9	203.9	-	-	-	200.6	-	-	194.0	-	-	188.5	-	-	179.7	-	-
98.4	178.6*	146.6	-	-	183.0	-	-	180.8	-	-	175.3	-	-	167.6	-	-
108.3	-	128.4	-	-	162.3	124.6	-	160.1	-	-	158.7	-	-	152.7	-	-
111.5	-	122.4	-	-	155.4	119.0	-	153.2	-	-	153.2	-	-	147.7	-	-
114.8	-	118.1	-	-	143.3*	114.8	-	148.0	112.4	-	147.7	-	-	143.0	-	-
118.1	-	113.8	-	-	137.8*	110.6	-	142.7	108.4	-	142.2	-	-	138.3	-	-
124.7	-	105.6	-	-	-	102.1	-	132.3	100.3	-	131.2	98.8	-	129.0	-	-
134.5	-	95.0	-	-	-	91.8	-	114.4*	89.7	-	118.8	88.2	-	115.7	83.8	-
137.8	-	-	-	-	-	88.4	-	110.2*	86.2	-	114.6	84.7	-	111.3	80.5	-
144.4	-	-	62.2	-	-	82.9	-	-	80.6	-	108.0	78.9	-	104.8	74.5	-
150.9	-	-	58.0	-	-	77.4	-	-	75.0	-	101.4	73.2	-	98.3	69.2	-
154.2	-	-	56.2	-	-	75.2	51.4	-	72.7	-	94.0*	70.8	-	95.6	66.9	-
157.5	-	-	54.3	-	-	-	49.6	-	70.4	-	91.3*	68.3	-	92.8	64.6	-
164.0	-	-	50.7	-	-	-	46.1	-	65.9	-	-	63.9	-	87.3	60.0	-
167.3	-	-	49.2	-	-	-	44.6	-	63.9	41.9	-	62.1	-	85.0	58.0	-
170.6	-	-	-	-	-	-	43.2	-	61.9	40.4	-	60.2	-	82.7	56.1	-
177.2	-	-	-	-	-	-	40.3	-	-	37.5	-	56.4	35.5	74.3*	52.2	-
187.0	-	-	-	-	-	-	37.0	-	-	33.8	-	51.8	31.7	-	47.5	-
190.3	-	-	-	-	-	-	-	-	-	32.6	-	50.3	30.4	-	45.9	25.8
203.4	-	-	-	-	-	-	-	-	-	28.7	-	-	26.2	-	40.6	21.6
210.0	-	-	-	-	-	-	-	-	-	-	-	-	24.6	-	38.4	19.8
216.5	-	-	-	-	-	-	-	-	-	-	-	-	22.9	-	-	18.1
223.1	-	-	-	-	-	-	-	-	-	-	-	-	21.6	-	-	16.7
229.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15.2
242.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	13.0

* Main boom angle 85°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SW

SUPERLIFT 3800

 452,000 lb +  110,200 lb				 27.6 ft			 32.2 ft/s			360°		75%	
 196.9 ft													
		177.2 ft			196.9 ft			216.5 ft			236.2 ft		
		SW_1											
		87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°
ft	1,000 lb												
62.3	251.3	-	-	-	-	-	-	-	-	-	-	-	
65.6	240.3	-	-	222.7	-	-	-	-	-	-	-	-	
72.2	219.4	-	-	211.6	-	-	192.9	-	-	-	-	-	
75.5	210.5	-	-	203.4	-	-	190.7	-	-	168.7	-	-	
78.7	201.7	-	-	195.1	-	-	188.5	-	-	167.6	-	-	
85.3	187.4	-	-	180.8	-	-	174.2	-	-	165.3	-	-	
91.9	174.2	-	-	167.6	-	-	162.0	-	-	155.4	-	-	
98.4	162.0	-	-	156.5	-	-	151.0	-	-	144.4	-	-	
111.5	142.2	-	-	136.7	-	-	132.3	-	-	126.8	-	-	
124.7	125.7	-	-	121.3	-	-	116.8	-	-	111.3	-	-	
137.8	111.3	-	-	108.2	-	-	104.3	-	-	99.2	-	-	
141.1	108.1	76.9	-	105.3	-	-	101.6	-	-	96.5	-	-	
150.9	98.3	69.0	-	96.6	65.7	-	93.5	-	-	88.6	-	-	
157.5	92.7	64.3	-	90.8	61.3	-	88.6	58.0	-	84.1	-	-	
164.0	87.1	59.5	-	85.1	56.9	-	84.0	54.5	-	79.6	-	-	
167.3	84.8	57.6	-	82.7	55.0	-	81.6	52.6	-	77.6	48.1	-	
177.2	77.8	51.8	-	75.8	49.2	-	74.5	47.2	-	71.7	43.7	-	
190.3	66.1*	45.4	-	67.7	42.5	-	66.4	40.6	-	64.8	38.4	-	
193.6	64.4*	44.0	-	66.0	41.2	-	64.7	39.2	-	63.2	37.0	-	
200.1	-	41.2	22.0	62.7	38.4	-	61.2	36.4	-	59.9	34.4	-	
203.4	-	39.9	20.9	61.1	37.0	-	59.5	35.1	-	58.2	33.1	-	
210.0	-	37.5	19.2	54.4*	34.6	15.9	56.5	32.6	-	55.0	30.6	-	
213.3	-	36.3	18.3	52.9*	33.4	15.0	55.1	31.4	-	53.4	29.4	-	
216.5	-	35.1	17.4	-	32.2	14.1	53.6	30.2	-	51.8	28.2	-	
229.7	-	31.1	14.1	-	28.0	11.0	44.5*	26.0	-	46.3	24.0	-	
232.9	-	-	13.4	-	27.1	10.4	43.2*	25.1	-	45.1	23.1	-	
239.5	-	-	12.1	-	25.4	9.0	-	23.4	-	42.7	21.2	-	
242.8	-	-	11.5	-	24.7	-	-	22.5	-	41.4	20.3	-	
249.3	-	-	10.4	-	23.1	-	-	20.9	-	35.7*	18.6	-	
252.6	-	-	9.8	-	-	-	-	20.2	-	34.8*	17.8	-	
255.9	-	-	9.3	-	-	-	-	19.4	-	-	17.0	-	
265.7	-	-	-	-	-	-	-	17.2	-	-	14.8	-	
269.0	-	-	-	-	-	-	-	-	-	-	14.1	-	
282.2	-	-	-	-	-	-	-	-	-	-	11.7	-	
285.4	-	-	-	-	-	-	-	-	-	-	11.2	-	

* Main boom angle 85°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SW**SUPERLIFT 3800**

452,000 lb + 110,200 lb				27.6 ft			32.2 ft/s			360°		75%	
196.9 ft													
		255.9 ft			275.6 ft			295.3 ft			315.0 ft		
		SW_1											
		87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°
ft	1,000 lb												
82.0	142.2	-	-	-	-	-	-	-	-	-	-	-	
85.3	141.1	-	-	123.5	-	-	-	-	-	-	-	-	
88.6	140.5	-	-	122.9	-	-	106.3	-	-	-	-	-	
91.9	140.0	-	-	122.4	-	-	105.6	-	-	-	-	-	
95.1	138.9	-	-	121.8	-	-	105.2	-	-	90.8	-	-	
98.4	137.8	-	-	121.3	-	-	104.7	-	-	90.4	-	-	
111.5	121.3	-	-	115.7	-	-	102.5	-	-	88.8	-	-	
124.7	107.4	-	-	102.3	-	-	98.1	-	-	86.9	-	-	
137.8	95.0	-	-	90.2	-	-	86.4	-	-	81.6	-	-	
150.9	84.7	-	-	80.0	-	-	76.3	-	-	71.9	-	-	
164.0	75.6	-	-	71.2	-	-	67.7	-	-	63.5	-	-	
173.9	69.8	41.2	-	65.6	-	-	62.0	-	-	57.9	-	-	
177.2	67.9	39.9	-	63.7	-	-	60.2	-	-	56.0	-	-	
183.7	64.5	37.3	-	60.3	32.6	-	56.9	-	-	52.8	-	-	
190.3	61.1	34.6	-	56.9	30.2	-	53.6	26.7	-	49.6	-	-	
200.1	56.6	31.3	-	52.6	26.9	-	49.3	23.4	-	45.3	19.0	-	
203.4	55.1	30.2	-	51.1	25.8	-	47.8	22.3	-	43.9	18.1	-	
216.5	49.8	26.0	-	45.9	21.8	-	42.5	18.5	-	38.8	14.3	-	
229.7	44.5	22.0	-	41.0	18.3	-	37.9	15.0	-	34.2	10.8	-	
236.2	42.0	20.2	-	38.8	16.5	-	35.8	13.4	-	32.1	9.3	-	
242.8	39.5	18.3	-	36.6	14.8	-	33.7	11.9	-	30.0	-	-	
255.9	35.3	15.0	-	32.2	11.7	-	30.0	9.0	-	26.2	-	-	
265.7	32.4	12.8	-	29.4	9.5	-	27.5	-	-	23.8	-	-	
269.0	28.2*	12.1	-	28.4	-	-	26.7	-	-	22.9	-	-	
272.3	27.3*	11.5	-	27.6	-	-	25.9	-	-	22.2	-	-	
282.2	-	9.5	-	24.9	-	-	23.4	-	-	19.8	-	-	
285.4	-	8.8	-	21.1*	-	-	22.6	-	-	19.1	-	-	
288.7	-	-	-	20.3*	-	-	21.8	-	-	18.4	-	-	
295.3	-	-	-	-	-	-	20.3	-	-	17.0	-	-	
308.4	-	-	-	-	-	-	14.3*	-	-	14.3	-	-	
321.5	-	-	-	-	-	-	-	-	-	12.1	-	-	

* Main boom angle 85°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SW

SUPERLIFT 3800

 452,000 lb +  110,200 lb				 27.6 ft				 32.2 ft/s				360°		75%		
 216.5 ft																
		78.7 ft			98.4 ft			118.1 ft			137.8 ft			157.5 ft		
		SW_1														
		87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°
ft		1,000 lb														
42.7	405.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
45.9	379.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
49.2	357.1	-	-	-	343.9	-	-	-	-	-	-	-	-	-	-	-
52.5	339.5	-	-	-	326.3	-	-	313.1	-	-	-	-	-	-	-	-
55.8	319.7	-	-	-	308.6	-	-	297.6	-	-	286.6	-	-	-	-	-
59.1	304.2	-	-	-	293.2	-	-	282.2	-	-	273.4	-	-	262.4	-	-
65.6	277.8	-	-	-	266.8	-	-	257.9	-	-	249.1	-	-	238.1	-	-
72.2	253.5	-	-	-	244.7	-	-	235.9	-	-	229.3	-	-	219.4	-	-
78.7	233.7	-	-	-	224.9	-	-	217.2	-	-	210.5	-	-	201.7	-	-
85.3	218.3	-	-	-	209.4	-	-	201.7	-	-	195.1	-	-	187.4	-	-
91.9	201.7	-	-	-	195.1	-	-	187.4	-	-	181.9	-	-	174.2	-	-
98.4	176.4*	-	-	-	181.9	-	-	175.3	-	-	169.8	-	-	162.0	-	-
101.7	168.7*	-	-	-	174.7	-	-	169.5	-	-	164.8	-	-	157.1	-	-
105.0	-	127.9	-	-	167.6	-	-	163.7	-	-	159.8	-	-	152.1	-	-
111.5	-	116.8	-	-	153.2	-	-	152.1	-	-	149.9	-	-	142.2	-	-
114.8	-	112.7	-	-	141.5*	109.1	-	146.9	-	-	145.0	-	-	138.3	-	-
121.4	-	104.4	-	-	131.2*	100.6	-	136.4	98.3	-	135.0	-	-	130.6	-	-
124.7	-	100.3	-	-	-	96.3	-	131.2	94.4	-	130.1	-	-	126.8	-	-
131.2	-	93.6	-	-	-	89.5	-	122.4	87.5	-	121.8	85.5	-	118.5	-	-
137.8	-	86.9	-	-	-	82.7	-	109.1*	80.7	-	113.5	79.1	-	110.2	75.0	-
141.1	-	-	-	-	-	80.0	-	105.6*	77.8	-	110.2	76.1	-	107.0	72.2	-
150.9	-	-	-	-	-	72.1	-	-	69.7	-	100.3	68.1	-	97.2	63.9	-
154.2	-	-	48.1	-	-	69.7	-	-	67.5	-	92.3*	65.9	-	94.5	61.7	-
157.5	-	-	46.4	-	-	67.7	-	-	65.3	-	89.5*	63.7	-	91.7	59.5	-
164.0	-	-	43.2	-	-	-	38.6	-	60.8	-	-	59.3	-	86.2	55.1	-
173.9	-	-	39.0	-	-	-	34.6	-	55.7	-	-	53.8	-	74.9*	49.7	-
177.2	-	-	-	-	-	-	33.3	-	54.0	30.6	-	52.0	-	72.8*	47.8	-
187.0	-	-	-	-	-	-	29.9	-	-	27.2	-	47.4	25.1	-	43.1	-
190.3	-	-	-	-	-	-	28.9	-	-	26.0	-	45.9	24.0	-	41.7	-
193.6	-	-	-	-	-	-	28.0	-	-	25.1	-	44.6	23.0	-	40.4	-
196.9	-	-	-	-	-	-	-	-	-	24.1	-	43.4	22.0	-	39.1	17.4
203.4	-	-	-	-	-	-	-	-	-	22.3	-	-	20.1	-	36.6	15.4
213.3	-	-	-	-	-	-	-	-	-	20.1	-	-	17.6	-	33.5	13.1
216.5	-	-	-	-	-	-	-	-	-	-	-	-	17.0	-	32.4	12.3
229.7	-	-	-	-	-	-	-	-	-	-	-	-	14.6	-	-	9.5
232.9	-	-	-	-	-	-	-	-	-	-	-	-	14.1	-	-	9.0

* Main boom angle 85°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SW**SUPERLIFT 3800**

 452,000 lb +  110,200 lb				 27.6 ft				 32.2 ft/s				360°				75%			
 216.5 ft																			
		177.2 ft			196.9 ft			216.5 ft			236.2 ft								
		SW_1																	
		87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°						
ft	1,000 lb																		
65.6	224.9	-	-	-	-	-	-	-	-	-	-	-	-	-	-				
68.9	218.3	-	-	198.4	-	-	-	-	-	-	-	-	-	-	-				
72.2	211.6	-	-	196.2	-	-	-	173.1	-	-	-	-	-	-	-				
78.7	195.1	-	-	188.5	-	-	-	169.8	-	-	-	147.7	-	-	-				
85.3	180.8	-	-	174.2	-	-	-	167.6	-	-	-	145.5	-	-	-				
91.9	167.6	-	-	162.0	-	-	-	156.5	-	-	-	143.3	-	-	-				
98.4	156.5	-	-	151.0	-	-	-	145.5	-	-	-	140.0	-	-	-				
111.5	137.8	-	-	132.3	-	-	-	127.9	-	-	-	122.4	-	-	-				
124.7	122.4	-	-	116.8	-	-	-	112.4	-	-	-	107.8	-	-	-				
137.8	109.6	-	-	104.7	-	-	-	100.8	-	-	-	95.7	-	-	-				
147.6	100.5	65.9	-	96.6	-	-	-	92.6	-	-	-	88.1	-	-	-				
150.9	97.4	63.9	-	93.9	-	-	-	90.2	-	-	-	85.5	-	-	-				
157.5	91.8	59.5	-	89.3	55.6	-	-	85.6	-	-	-	81.1	-	-	-				
164.0	86.2	55.1	-	84.4	52.2	-	-	81.1	48.5	-	-	76.7	-	-	-				
173.9	79.1	49.5	-	77.3	46.6	-	-	75.3	44.2	-	-	70.9	39.5	-	-				
177.2	76.9	47.6	-	75.0	44.8	-	-	73.4	42.8	-	-	69.0	38.1	-	-				
190.3	69.2	41.2	-	67.0	38.6	-	-	65.7	36.6	-	-	62.4	33.1	-	-				
196.9	61.5*	38.6	-	63.6	35.9	-	-	62.3	34.0	-	-	59.3	30.9	-	-				
203.4	-	35.9	-	60.2	33.3	-	-	58.9	31.3	-	-	56.4	28.9	-	-				
210.0	-	33.7	13.2	53.1*	31.0	-	-	55.8	29.0	-	-	53.8	26.8	-	-				
216.5	-	31.5	11.7	50.3*	28.7	-	-	52.7	26.7	-	-	51.1	24.7	-	-				
226.4	-	28.5	9.5	-	25.7	-	-	48.7	23.7	-	-	46.8	21.6	-	-				
229.7	-	27.6	-	-	24.7	-	-	43.2*	22.7	-	-	45.4	20.5	-	-				
232.9	-	26.9	-	-	23.9	-	-	42.1*	21.8	-	-	44.3	19.6	-	-				
236.2	-	-	-	-	23.0	-	-	41.0*	20.9	-	-	43.1	18.7	-	-				
242.8	-	-	-	-	21.4	-	-	-	19.2	-	-	40.8	17.0	-	-				
252.6	-	-	-	-	19.2	-	-	-	16.9	-	-	33.7*	14.7	-	-				
255.9	-	-	-	-	-	-	-	-	16.1	-	-	-	13.9	-	-				
269.0	-	-	-	-	-	-	-	-	13.7	-	-	-	11.2	-	-				
272.3	-	-	-	-	-	-	-	-	13.0	-	-	-	10.6	-	-				
282.2	-	-	-	-	-	-	-	-	-	-	-	-	8.8	-	-				

* Main boom angle 85°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SW

SUPERLIFT 3800

452,000 lb +  110,200 lb				 27.6 ft			 32.2 ft/s			360°		75%	
 216.5 ft													
		255.9 ft			275.6 ft			295.3 ft			315.0 ft		
		SW_1											
		87°	75°	65°	87°	75°	65°	87°	75°	65°	87°	75°	65°
ft	1,000 lb												
82.0	127.9	-	-	-	-	-	-	-	-	-	-	-	
85.3	126.8	-	-	110.2	-	-	-	-	-	-	-	-	
91.9	125.7	-	-	110.0	-	-	95.0	-	-	-	-	-	
95.1	124.6	-	-	109.3	-	-	94.5	-	-	81.4	-	-	
98.4	123.5	-	-	108.7	-	-	93.9	-	-	80.9	-	-	
111.5	116.8	-	-	106.0	-	-	91.9	-	-	79.4	-	-	
124.7	103.4	-	-	98.3	-	-	89.3	-	-	77.4	-	-	
137.8	91.5	-	-	86.9	-	-	82.9	-	-	75.4	-	-	
150.9	81.6	-	-	76.9	-	-	73.2	-	-	68.8	-	-	
164.0	73.0	-	-	68.3	-	-	65.0	-	-	60.6	-	-	
177.2	65.5	-	-	61.1	-	-	57.5	-	-	53.4	-	-	
180.4	63.7	33.1	-	59.5	-	-	55.9	-	-	51.8	-	-	
190.3	58.6	29.5	-	54.7	24.9	-	51.1	-	-	47.2	-	-	
196.9	55.8	27.3	-	51.7	22.8	-	48.4	19.4	-	44.4	-	-	
203.4	52.9	25.1	-	48.7	20.7	-	45.6	17.4	-	41.7	-	-	
206.7	51.6	24.2	-	47.5	19.8	-	44.3	16.5	-	40.4	12.1	-	
216.5	47.8	21.4	-	43.7	17.2	-	40.6	13.9	-	36.6	9.5	-	
229.7	43.2	18.1	-	39.2	13.9	-	36.2	10.6	-	32.2	-	-	
236.2	41.0	16.5	-	37.1	12.3	-	34.1	9.0	-	30.2	-	-	
242.8	38.8	15.0	-	35.1	10.8	-	32.0	-	-	28.2	-	-	
249.3	36.7	13.4	-	33.2	9.5	-	30.1	-	-	26.2	-	-	
255.9	34.6	11.9	-	31.3	-	-	28.2	-	-	24.5	-	-	
269.0	27.1*	9.3	-	27.8	-	-	24.9	-	-	21.2	-	-	
272.3	26.2*	-	-	27.0	-	-	24.2	-	-	20.4	-	-	
282.2	-	-	-	24.5	-	-	22.0	-	-	18.3	-	-	
292.0	-	-	-	18.5*	-	-	19.9	-	-	16.1	-	-	
295.3	-	-	-	-	-	-	19.2	-	-	15.4	-	-	
308.4	-	-	-	-	-	-	13.2*	-	-	13.0	-	-	
311.7	-	-	-	-	-	-	12.8*	-	-	12.5	-	-	
321.5	-	-	-	-	-	-	-	-	-	10.8	-	-	

* Main boom angle 85°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SW

SUPERLIFT 3800

 452,000 lb +  110,200 lb		 27.6 ft		 32.2 ft/s		360°		75%	
 236.2 ft									
  137.8 ft 157.5 ft SW_1 87° 75° 65° 87° 75° 65°									
ft1,000 lb									
59.1	262.4	-	-	-	-	-	-	-	-
62.3	251.3	-	-	231.5	-	-	-	-	-
65.6	240.3	-	-	229.3	-	-	-	-	-
72.2	220.5	-	-	210.5	-	-	-	-	-
78.7	202.8	-	-	194.0	-	-	-	-	-
85.3	188.5	-	-	179.7	-	-	-	-	-
91.9	175.3	-	-	167.6	-	-	-	-	-
98.4	164.2	-	-	156.5	-	-	-	-	-
111.5	144.4	-	-	137.8	-	-	-	-	-
124.7	129.0	-	-	122.4	-	-	-	-	-
137.8	112.4	72.5	-	109.8	-	-	-	-	-
144.4	105.7	67.2	-	103.0	62.8	-	-	-	-
150.9	99.0	61.9	-	96.1	58.0	-	-	-	-
160.8	85.3*	55.7	-	87.9	51.5	-	-	-	-
164.0	-	53.6	-	85.1	49.4	-	-	-	-
177.2	-	46.5	-	71.0*	42.5	-	-	-	-
180.4	-	45.1	-	69.2*	41.1	-	-	-	-
190.3	-	40.8	-	-	36.6	-	-	-	-
196.9	-	38.6	14.3	-	34.2	-	-	-	-
200.1	-	37.5	13.6	-	33.0	-	-	-	-
203.4	-	-	12.8	-	31.7	-	-	-	-
216.5	-	-	9.9	-	27.8	-	-	-	-
219.8	-	-	9.3	-	26.9	-	-	-	-

		177.2 ft			196.9 ft			216.5 ft		
		SW_1								
		87°	75°	65°	87°	75°	65°	87°	75°	65°
ft		1,000 lb								
65.6	205.0	-	-	-	-	-	-	-	-	
68.9	202.8	-	-	179.7	-	-	-	-	-	
72.2	200.6	-	-	178.6	-	-	-	-	-	
75.5	194.0	-	-	176.9	-	-	153.2	-	-	
78.7	187.4	-	-	175.3	-	-	152.1	-	-	
85.3	174.2	-	-	167.6	-	-	149.9	-	-	
91.9	162.0	-	-	155.4	-	-	146.6	-	-	
98.4	151.0	-	-	145.5	-	-	140.0	-	-	
111.5	132.3	-	-	126.8	-	-	122.4	-	-	
124.7	117.9	-	-	112.4	-	-	108.7	-	-	
137.8	105.6	-	-	100.8	-	-	96.8	-	-	
150.9	95.2	-	-	90.6	-	-	86.9	-	-	
154.2	92.8	54.7	-	88.4	-	-	84.7	-	-	
160.8	87.8	51.1	-	84.0	46.7	-	80.2	-	-	
164.0	85.3	49.4	-	81.8	45.2	-	78.0	-	-	
170.6	80.7	46.0	-	77.9	42.4	-	74.3	38.8	-	
177.2	76.1	42.5	-	74.1	39.7	-	70.5	36.4	-	
190.3	68.3	36.6	-	66.1	33.7	-	63.9	31.7	-	
196.9	60.2*	34.1	-	62.8	31.2	-	61.0	29.2	-	
203.4	-	31.5	-	59.5	28.7	-	58.0	26.7	-	
216.5	-	27.1	-	48.7*	24.3	-	51.8	22.3	-	
229.7	-	23.6	-	-	20.5	-	46.5	18.5	-	
236.2	-	22.0	-	-	19.0	-	39.5*	17.0	-	
239.5	-	21.2	-	-	18.2	-	-	16.2	-	
242.8	-	-	-	-	17.4	-	-	15.4	-	
255.9	-	-	-	-	14.8	-	-	12.6	-	
259.2	-	-	-	-	14.1	-	-	12.0	-	
269.0	-	-	-	-	-	-	-	10.1	-	
275.6	-	-	-	-	-	-	-	9.0	-	


* Main boom angle 85°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

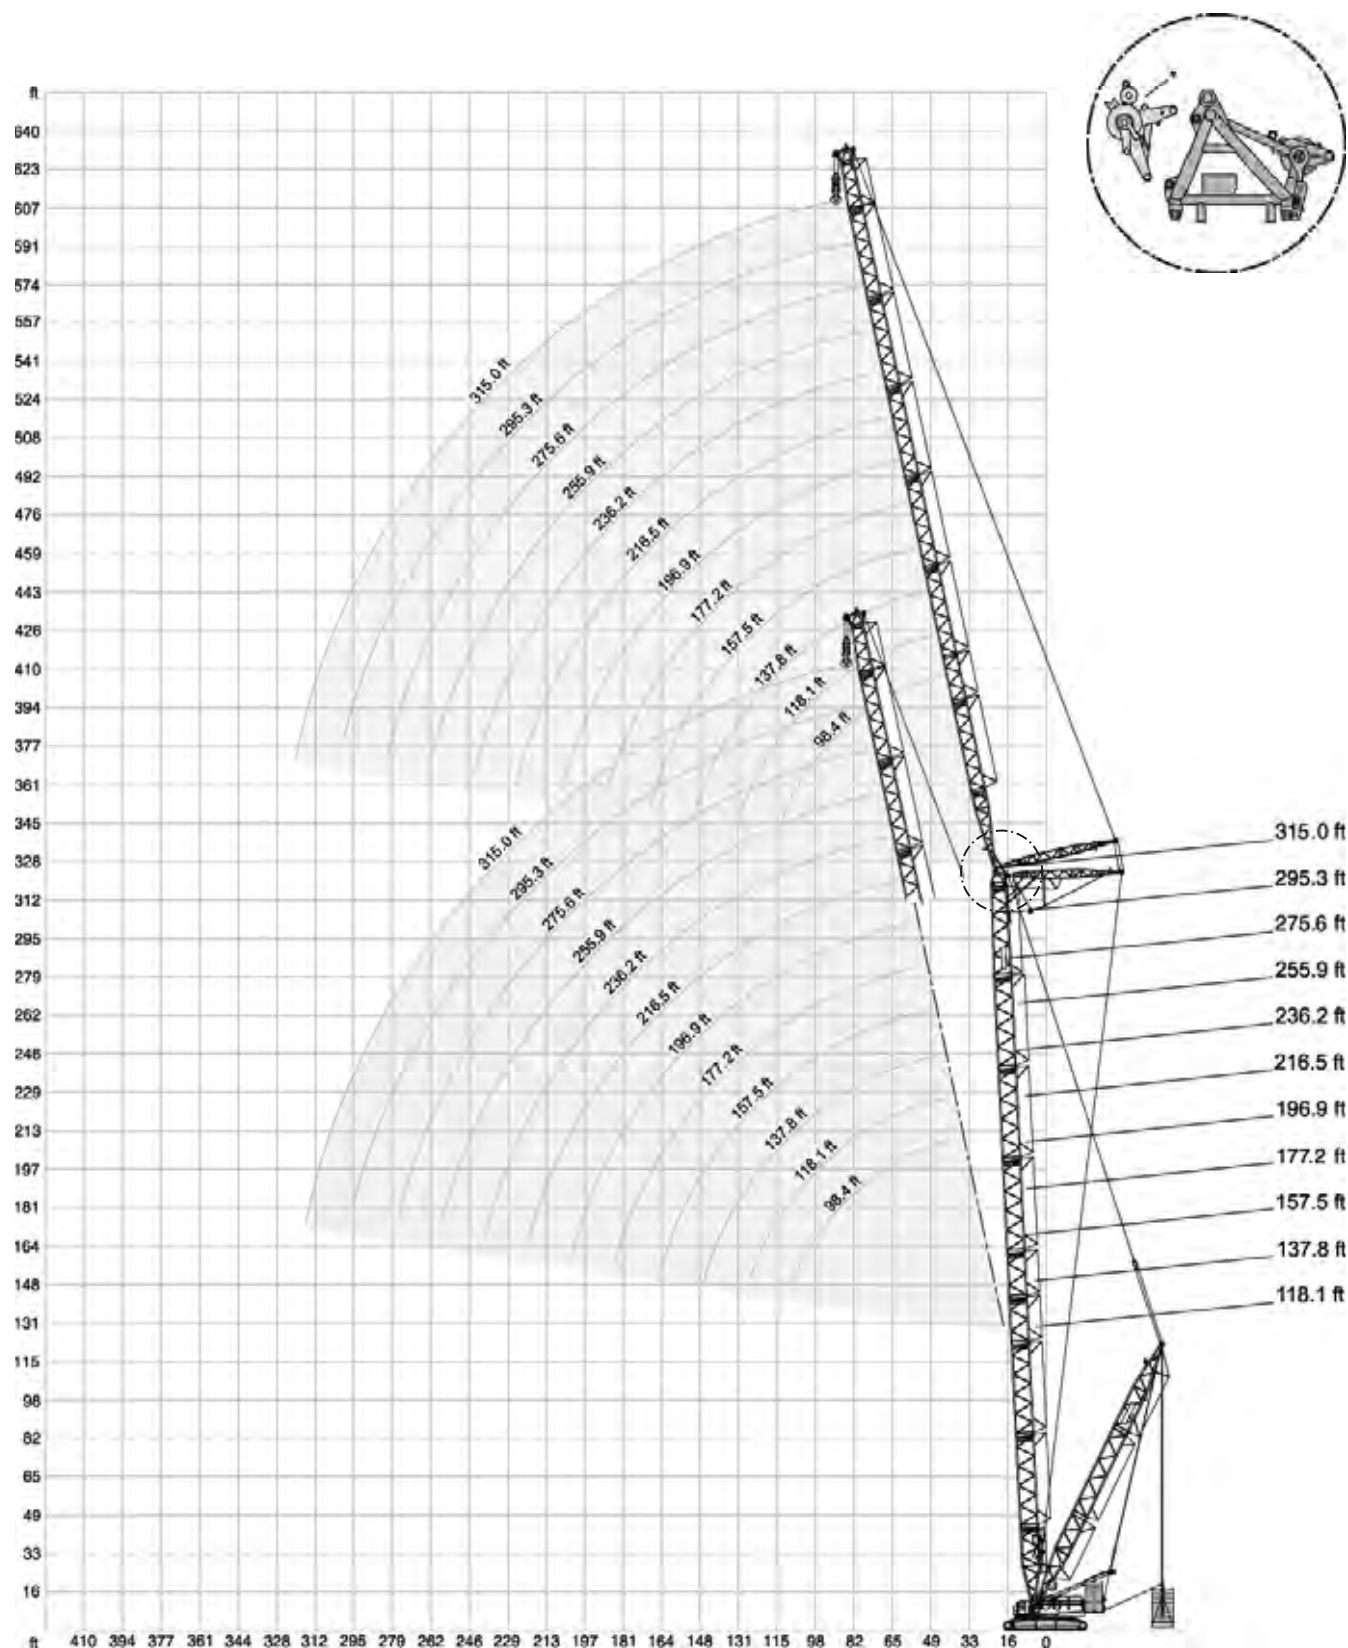

* Attachable



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

118.1 ft + 78.7 ft

	SWSL-1					SFSL-1
	0 lb	0 lb - 716,600 lb				
	85°	87/85°	75°	65°	55°	15°
ft			1,000 lb			
78.7	-	-	765.0	-	-	-
85.3	-	-	714.3	-	-	712.1
88.6	-	-	688.9	-	-	684.5
91.9	-	-	663.6	-	-	657.0
98.4	-	-	617.3	-	-	608.5
108.3	-	-	524.7	546.7	-	546.7
111.5	-	-	493.8	529.1	-	526.2
114.8	-	-	451.9	513.1	-	505.6
124.7	-	-	-	465.2	-	451.2
134.5	-	-	-	427.7	-	400.5
137.8	-	-	-	-	383.6	383.6
150.9	-	-	-	-	346.1	333.6
164.0	-	-	-	-	-	285.9
177.2	-	-	-	-	-	246.9
187.0	-	-	-	-	-	215.0

118.1 ft + 118.1 ft

ft			1,000 lb			
95.1	-	-	632.7	-	-	-
98.4	-	-	610.7	-	-	-
111.5	-	-	535.7	-	-	537.9
124.7	-	-	445.3	-	-	469.6
128.0	-	-	425.5	-	-	454.2
131.2	-	-	405.7	434.3	-	438.7
137.8	-	-	366.0	410.1	-	407.9
150.9	-	-	295.4	368.2	-	357.9
164.0	-	-	-	335.1	306.4	312.3
170.6	-	-	-	310.9	293.2	293.9
177.2	-	-	-	-	280.0	277.8
190.3	-	-	-	-	257.9	242.5
203.4	-	-	-	-	-	209.4
216.5	-	-	-	-	-	185.2
223.1	-	-	-	-	-	169.8

118.1 ft + 157.5 ft

ft			1,000 lb			
108.3	-	-	447.5	-	-	-
111.5	-	-	447.5	-	-	-
124.7	-	-	445.3	-	-	443.9
137.8	-	-	383.6	-	-	418.9
150.9	-	-	330.7	-	-	374.8
154.2	-	-	320.2	357.1	-	363.8
164.0	-	-	288.8	332.9	-	332.2
170.6	-	-	267.9	317.5	-	311.6
177.2	-	-	246.9	302.0	-	291.0
190.3	-	-	208.3	275.6	-	258.7
193.6	-	-	-	266.2	246.9	250.6
203.4	-	-	-	238.1	233.7	231.1
210.0	-	-	-	219.4	225.4	219.7
216.5	-	-	-	-	217.2	208.3
226.4	-	-	-	-	206.1	189.6
229.7	-	-	-	-	-	183.4
242.8	-	-	-	-	-	162.0
255.9	-	-	-	-	-	142.2
262.5	-	-	-	-	-	133.4

118.1 ft + 196.9 ft

	SWSL-1					SFSL-1
	0 lb	0 lb - 716,600 lb				
	85°	87/85°	75°	65°	55°	15°
ft			1,000 lb			
128.0	-	-	306.4	-	-	-
137.8	-	-	306.4	-	-	-
150.9	-	-	306.4	-	-	308.6
164.0	-	-	288.8	-	-	299.8
173.9	-	-	264.0	264.6	-	293.2
177.2	-	-	255.7	264.6	-	291.0
190.3	-	-	224.9	264.6	-	266.0
203.4	-	-	198.4	242.5	-	241.0
206.7	-	-	192.4	236.4	-	234.8
216.5	-	-	174.2	218.3	-	216.1
219.8	-	-	167.6	212.5	208.3	210.4
226.4	-	-	154.3	200.9	200.6	200.6
229.7	-	-	-	195.1	197.3	196.2
242.8	-	-	-	170.9	184.1	177.5
246.1	-	-	-	164.2	181.3	172.5
255.9	-	-	-	-	173.1	157.6
265.7	-	-	-	-	165.3	144.7
269.0	-	-	-	-	-	141.6
282.2	-	-	-	-	-	126.7
295.3	-	-	-	-	-	110.2
298.6	-	-	-	-	-	108.5

118.1 ft + 236.2 ft

ft			1,000 lb			
144.4	-	-	213.8	-	-	-
150.9	-	-	213.8	-	-	-
164.0	-	-	212.7	-	-	213.1
177.2	-	-	211.6	-	-	207.2
190.3	-	-	209.4	-	-	202.1
196.9	-	-	207.8	180.8	-	199.5
203.4	-	-	206.1	180.8	-	195.8
216.5	-	-	185.2	180.8	-	190.7
229.7	-	-	165.3	180.8	-	184.8
239.5	-	-	152.1	179.1	-	179.7
242.8	-	-	147.7	178.6	-	177.5
246.1	-	-	143.3	174.7	154.3	175.3
255.9	-	-	130.1	163.1	154.3	168.7
265.7	-	-	116.8	149.9	154.3	157.6
269.0	-	-	-	145.5	154.3	153.6
282.2	-	-	-	129.0	147.7	137.8
285.4	-	-	-	124.6	145.5	133.9
295.3	-	-	-	-	138.9	122.4
301.8	-	-	-	-	133.4	116.6
308.4	-	-	-	-	-	110.9
321.5	-	-	-	-	-	98.0
334.6	-	-	-	-	-	88.0
337.9	-	-	-	-	-	84.2

	0 lb	143,300 lb	275,600 lb	363,800 lb
	452,000 lb	540,200 lb	628,400 lb	716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

118.1 ft + 275.6 ft

	SWSL-1					SFSL-1
	0 lb	0 lb - 716,600 lb				
	85°	87/85°	75°	65°	55°	15°
ft	1,000 lb					
160.8	-	-	146.6	-	-	-
164.0	-	-	146.6	-	-	-
177.2	-	-	145.5	-	-	-
190.3	-	-	144.4	-	-	142.9
203.4	-	-	143.3	-	-	139.3
216.5	-	-	141.1	-	-	135.6
219.8	-	-	140.8	121.3	-	134.5
229.7	-	-	140.0	121.3	-	131.2
242.8	-	-	138.9	121.3	-	127.1
255.9	-	-	136.7	121.3	-	123.5
269.0	-	-	123.5	121.3	-	120.8
275.6	-	-	116.8	121.3	104.9	119.0
278.9	-	-	113.5	121.3	104.9	118.3
282.2	-	-	110.2	121.3	104.9	117.6
295.3	-	-	97.9	121.3	104.9	114.6
305.1	-	-	87.5	113.0	104.9	112.4
308.4	-	-	-	110.2	104.9	111.7
321.5	-	-	-	97.9	104.9	105.5
324.8	-	-	-	94.4	104.9	103.4
334.6	-	-	-	-	104.9	97.2
341.2	-	-	-	-	102.1	91.4
347.8	-	-	-	-	-	85.6
360.9	-	-	-	-	-	73.9
374.0	-	-	-	-	-	65.9
377.3	-	-	-	-	-	62.8

118.1 ft + 315.0 ft

	SWSL-1					SFSL-1
	0 lb	0 lb - 716,600 lb				
	85°	87/85°	75°	65°	55°	15°
ft	1,000 lb					
177.2	-	-	102.5	-	-	-
190.3	-	-	101.6	-	-	-
203.4	-	-	100.8	-	-	101.0
216.5	-	-	99.6	-	-	97.9
229.7	-	-	98.3	-	-	95.1
242.8	-	-	97.2	83.6	-	92.2
255.9	-	-	96.1	83.6	-	89.3
269.0	-	-	94.8	83.6	-	86.5
282.2	-	-	93.9	83.6	-	83.8
295.3	-	-	93.3	83.6	-	81.4
301.8	-	-	92.8	83.6	70.1	80.1
308.4	-	-	92.4	83.6	70.1	78.9
318.2	-	-	85.8	83.6	70.1	77.1
321.5	-	-	83.6	83.6	70.1	76.6
334.6	-	-	73.6	83.6	70.1	74.5
341.2	-	-	68.1	83.6	70.1	73.7
347.8	-	-	-	83.6	70.1	72.9
360.9	-	-	-	74.1	70.1	71.4
374.0	-	-	-	-	70.1	70.1
380.6	-	-	-	-	70.1	66.7
387.1	-	-	-	-	-	63.2
400.3	-	-	-	-	-	55.4
413.4	-	-	-	-	-	48.1

0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

137.8 ft + 78.7 ft

	SWSL-1					SFSL-1
	0 lb	0 lb - 716,600 lb				
	85°	87/85°	75°	65°	55°	15°
ft			1,000 lb			
36.1	-	765.0*	-	-	-	-
39.4	-	765.0*	-	-	-	-
45.9	434.3	765.0	-	-	-	-
52.5	381.4	765.0	-	-	-	765.0
59.1	341.7	765.0	-	-	-	765.0
65.6	306.4	765.0	-	-	-	765.0
72.2	280.0	729.7	-	-	-	765.0
78.7	249.1	641.5	-	-	-	765.0
82.0	235.9	596.4	734.1	-	-	736.3
85.3	222.7	551.2	707.7	-	-	707.7
88.6	212.7	510.4	681.2	-	-	680.1
91.9	202.8	469.6	654.8	-	-	652.6
95.1	194.0	427.7	632.7	-	-	628.3
98.4	-	-	610.7	-	-	604.1
111.5	-	-	537.9	-	-	529.1
118.1	-	-	469.6	491.6	-	491.6
124.7	-	-	-	465.2	-	464.4
137.8	-	-	-	416.7	-	410.1
141.1	-	-	-	405.7	-	397.9
150.9	-	-	-	-	363.8	361.6
164.0	-	-	-	-	330.7	313.8
177.2	-	-	-	-	-	271.2
190.3	-	-	-	-	-	234.4
203.4	-	-	-	-	-	205.0

137.8 ft + 118.1 ft

ft	1,000 lb				
45.9	-	643.8*	-	-	-
52.5	-	634.9*	-	-	-
55.8	332.9	654.8	-	-	-
59.1	315.3	652.6	-	-	-
65.6	284.4	646.0	-	-	628.3
72.2	260.1	630.5	-	-	623.9
78.7	238.1	617.3	-	-	621.7
85.3	219.4	588.6	-	-	617.3
91.9	199.5	533.5	-	-	615.1
98.4	181.9	478.4	604.1	-	608.5
111.5	153.2	388.0	531.3	-	533.5
124.7	132.3	313.1	471.8	-	468.1
128.0	127.9	294.3	451.4	-	454.2
131.2	123.5	275.6	431.0	-	440.2
137.8	-	-	390.2	-	412.3
141.1	-	-	372.6	399.0	401.2
150.9	-	-	319.7	368.2	368.2
157.5	-	-	282.2	351.6	346.1
164.0	-	-	-	335.1	329.2
177.2	-	-	-	306.4	295.4
180.4	-	-	-	297.6	288.8
190.3	-	-	-	-	271.2
200.1	-	-	-	-	255.7
203.4	-	-	-	-	229.6
216.5	-	-	-	-	206.1
229.7	-	-	-	-	178.2
239.5	-	-	-	-	163.1

	0 lb	143,300 lb	275,600 lb	363,800 lb
	452,000 lb	540,200 lb	628,400 lb	716,600 lb

137.8 ft + 157.5 ft

	SWSL-1					SFSL-1
	0 lb	0 lb - 716,600 lb				
	85°	87/85°	75°	65°	55°	15°
ft			1,000 lb			
55.8	-	449.7*	-	-	-	-
59.1	-	449.7*	-	-	-	-
65.6	264.6	454.2	-	-	-	-
72.2	240.3	454.2	-	-	-	-
78.7	220.5	451.9	-	-	-	443.1
85.3	203.9	449.7	-	-	-	443.1
91.9	189.6	445.3	-	-	-	443.1
98.4	176.4	440.9	-	-	-	443.1
111.5	151.0	416.7	-	-	-	436.5
114.8	145.5	400.1	421.1	-	-	436.5
124.7	129.0	350.5	421.1	-	-	429.9
137.8	112.4	297.6	414.5	-	-	416.7
150.9	99.0	253.5	352.7	-	-	372.6
164.0	88.0	213.8	302.0	328.5	-	333.6
167.3	85.6	203.4	291.6	321.9	-	325.2
170.6	83.3	192.9	281.1	314.5	-	316.7
177.2	-	-	260.1	299.8	-	299.8
190.3	-	-	220.5	275.6	-	273.4
193.6	-	-	210.5	270.6	-	266.8
203.4	-	-	-	255.7	-	248.4
206.7	-	-	-	246.9	242.5	242.5
216.5	-	-	-	220.5	229.3	224.9
229.7	-	-	-	-	213.8	199.2
239.5	-	-	-	-	202.8	181.0
242.8	-	-	-	-	-	176.8
255.9	-	-	-	-	-	158.7
269.0	-	-	-	-	-	138.2
278.9	-	-	-	-	-	126.8

137.8 ft + 196.9 ft

ft	1,000 lb				
65.6	-	321.9*	-	-	-
72.2	-	319.7*	-	-	-
75.5	216.1	321.9	-	-	-
78.7	206.1	321.9	-	-	-
85.3	190.7	319.7	-	-	-
91.9	176.4	319.7	-	-	317.5
98.4	164.2	317.5	-	-	317.5
111.5	143.3	313.1	-	-	314.5
124.7	125.7	308.6	-	-	310.9
131.2	117.8	305.3	293.2	-	308.6
137.8	110.0	302.0	293.2	-	306.4
150.9	96.3	266.8	291.0	-	299.1
164.0	85.1	231.5	291.0	-	289.5
177.2	75.8	202.8	271.2	-	282.2
183.7	71.9	189.6	253.5	249.1	274.8
190.3	67.9	176.4	235.9	249.1	267.5
203.4	61.1	149.9	208.3	249.1	249.9
210.0	58.2	135.6	195.1	241.4	239.6
216.5	-	-	181.9	233.7	229.3
229.7	-	-	156.5	210.5	211.6
232.9	-	-	149.9	204.2	207.2
242.8	-	-	-	185.2	195.1
255.9	-	-	-	159.8	181.9
269.0	-	-	-	-	170.9
275.6	-	-	-	-	165.3
282.2	-	-	-	-	139.6
295.3	-	-	-	-	123.5
308.4	-	-	-	-	109.0
318.2	-	-	-	-	98.8

111 * Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

137.8 ft + 236.2 ft

	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
ft	1,000 lb					
72.2	-	231.5*	-	-	-	-
78.7	-	229.3*	-	-	-	-
85.3	177.5	229.3	-	-	-	-
91.9	164.2	229.3	-	-	-	-
98.4	152.1	227.1	-	-	-	-
105.0	142.2	226.0	-	-	-	224.9
111.5	132.3	224.9	-	-	-	223.8
124.7	116.8	220.5	-	-	-	221.2
137.8	103.6	218.3	-	-	-	218.3
147.6	95.2	215.0	203.9	-	-	215.0
150.9	92.4	213.8	203.9	-	-	213.8
164.0	81.8	209.4	203.9	-	-	208.7
177.2	72.3	205.0	203.9	-	-	202.8
190.3	64.4	187.4	203.9	-	-	197.7
203.4	57.5	166.4	202.8	-	-	191.4
206.7	55.9	161.5	200.1	172.0	-	190.1
216.5	51.1	146.6	191.8	172.0	-	186.3
229.7	45.6	129.0	170.9	172.0	-	181.1
242.8	41.0	110.2	152.1	172.0	-	176.0
246.1	39.9	105.8	147.7	172.0	-	174.7
255.9	-	-	134.5	172.0	-	170.9
259.2	-	-	130.1	167.8	145.5	169.8
269.0	-	-	116.8	155.4	145.5	161.2
272.3	-	-	111.3	151.0	145.5	158.3
282.2	-	-	-	137.8	145.5	147.7
292.0	-	-	-	124.6	144.7	136.1
295.3	-	-	-	-	144.4	132.3
308.4	-	-	-	-	135.6	121.3
315.0	-	-	-	-	129.0	115.7
321.5	-	-	-	-	-	108.8
334.6	-	-	-	-	-	96.3
347.8	-	-	-	-	-	84.6
354.3	-	-	-	-	-	78.7

137.8 ft + 275.6 ft

	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
ft	1,000 lb					
82.0	-	165.3*	-	-	-	-
85.3	-	164.2*	-	-	-	-
91.9	-	163.1*	-	-	-	-
95.1	146.6	163.1	-	-	-	-
98.4	141.1	162.0	-	-	-	-
111.5	122.4	159.8	-	-	-	-
118.1	114.8	158.7	-	-	-	157.6
124.7	107.1	157.6	-	-	-	156.5
137.8	94.6	154.3	-	-	-	154.3
150.9	83.8	152.1	-	-	-	151.4
164.0	74.3	148.8	141.1	-	-	148.1
177.2	66.4	145.5	141.1	-	-	144.4
190.3	59.3	143.3	140.0	-	-	140.0
203.4	53.1	140.0	138.9	-	-	136.0
216.5	47.2	137.8	137.8	-	-	132.3
229.7	41.7	135.6	136.7	115.7	-	128.6
242.8	36.6	122.4	136.7	115.7	-	125.1
255.9	32.4	109.3	135.6	115.7	-	121.3
269.0	28.4	96.1	127.9	115.7	-	118.3
278.9	26.0	85.9	117.9	115.7	-	115.2
282.2	25.1	82.5	114.6	115.7	-	114.3
285.4	24.3	78.7	111.4	115.7	99.2	113.5
295.3	-	-	101.6	115.7	99.2	111.3
308.4	-	-	88.2	115.7	99.2	109.1
321.5	-	-	-	105.2	99.2	106.8
331.4	-	-	-	95.2	99.2	104.9
334.6	-	-	-	-	99.2	104.3
347.8	-	-	-	-	99.2	95.2
351.1	-	-	-	-	99.2	92.4
360.9	-	-	-	-	-	83.8
374.0	-	-	-	-	-	75.6
387.1	-	-	-	-	-	64.4
393.7	-	-	-	-	-	58.9

0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

137.8 ft + 315.0 ft

ft	SWSL-1					SFSL-1
	0 lb - 716,600 lb					
	85°	87/85°	75°	65°	55°	15°
91.9	-	120.2*	-	-	-	-
98.4	-	119.0*	-	-	-	-
105.0	114.6	116.8	-	-	-	-
111.5	112.4	115.7	-	-	-	-
124.7	98.1	113.5	-	-	-	-
131.2	91.9	112.4	-	-	-	112.4
137.8	85.8	111.3	-	-	-	111.3
150.9	75.4	110.0	-	-	-	109.6
164.0	66.6	107.8	-	-	-	107.3
177.2	58.9	105.6	-	-	-	104.5
180.4	57.2	105.1	98.5	-	-	103.8
190.3	52.0	103.4	98.1	-	-	101.7
203.4	45.9	101.4	97.7	-	-	98.8
216.5	40.6	99.2	96.8	-	-	95.9
229.7	35.9	97.0	95.9	-	-	93.0
242.8	31.5	95.2	95.0	-	-	90.1
252.6	28.7	93.9	94.2	79.4	-	88.0
255.9	27.8	93.5	93.9	79.4	-	87.3
269.0	24.0	91.7	93.0	79.4	-	84.7
282.2	20.5	89.9	92.2	79.4	-	82.0
295.3	17.4	80.9	91.5	79.4	-	79.4
308.4	14.6	70.8	90.8	79.4	-	77.0
315.0	13.2	65.4	88.3	79.4	65.7	75.8
318.2	12.6	62.7	87.0	79.4	65.7	75.3
321.5	11.9	60.0	85.8	79.4	65.7	74.7
334.6	-	-	75.8	79.4	65.7	72.5
347.8	-	-	65.3	79.4	65.7	70.8
360.9	-	-	-	79.1	65.7	69.1
370.7	-	-	-	71.4	65.7	67.9
374.0	-	-	-	-	65.7	67.5
387.1	-	-	-	-	65.7	66.3
390.4	-	-	-	-	65.7	66.0
400.3	-	-	-	-	-	62.6
413.4	-	-	-	-	-	56.4
426.5	-	-	-	-	-	46.6
429.8	-	-	-	-	-	44.1



0 lb 143,300 lb 275,600 lb 363,800 lb
452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1

157.5 ft + 78.7 ft

ft	SWSL-1					SFSL-1
	0 lb - 716,600 lb					
	85°	87/85°	75°	65°	55°	15°
39.4	-	765.0*	-	-	-	-
45.9	-	765.0	-	-	-	-
49.2	388.0	765.0	-	-	-	-
52.5	366.0	765.0	-	-	-	765.0
59.1	326.3	765.0	-	-	-	765.0
65.6	295.4	756.2	-	-	-	765.0
72.2	269.0	723.1	-	-	-	765.0
78.7	246.9	663.6	-	-	-	760.6
85.3	220.5	577.6	-	-	-	703.3
88.6	210.5	535.7	672.4	-	-	675.7
91.9	200.6	493.8	648.2	-	-	648.2
95.1	191.8	454.2	626.1	-	-	623.9
98.4	-	-	604.1	-	-	599.7
111.5	-	-	531.3	-	-	524.7
124.7	-	-	451.9	-	-	460.0
128.0	-	-	-	443.1	-	446.4
137.8	-	-	-	410.1	-	405.7
150.9	-	-	-	368.2	-	361.6
160.8	-	-	-	-	330.7	331.1
164.0	-	-	-	-	321.9	322.6
173.9	-	-	-	-	302.0	297.3
177.2	-	-	-	-	-	288.8
190.3	-	-	-	-	-	253.5
203.4	-	-	-	-	-	218.3
216.5	-	-	-	-	-	191.8
219.8	-	-	-	-	-	183.0

157.5 ft + 118.1 ft

ft	1,000 lb				
	85°	87/85°	75°	65°	55°
	15°	15°	15°	15°	15°
45.9	-	586.4*	-	-	-
52.5	-	579.8*	-	-	-
59.1	302.0	593.0	-	-	-
65.6	273.4	586.4	-	-	571.0
72.2	249.1	577.6	-	-	571.0
78.7	229.3	568.8	-	-	568.8
85.3	211.6	551.2	-	-	566.6
91.9	196.2	535.7	-	-	562.2
98.4	180.8	496.0	-	-	560.0
105.0	166.4	448.6	560.0	-	534.3
111.5	152.1	401.2	524.7	-	512.9
124.7	131.2	326.3	467.4	-	464.4
128.0	126.8	307.9	455.8	-	450.8
134.5	117.9	271.2	432.7	-	423.7
137.8	-	-	421.1	-	410.1
150.9	-	-	348.3	363.8	366.0
160.8	-	-	295.4	337.3	335.5
164.0	-	-	-	328.5	327.0
177.2	-	-	-	299.8	293.2
187.0	-	-	-	282.2	273.4
190.3	-	-	-	-	266.8
203.4	-	-	-	-	244.7
213.3	-	-	-	-	233.7
216.5	-	-	-	-	219.4
229.7	-	-	-	-	192.2
242.8	-	-	-	-	170.6
255.9	-	-	-	-	147.7
259.2	-	-	-	-	142.2



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

157.5 ft + 157.5 ft

	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
ft	1,000 lb					
55.8	-	416.7*	-	-	-	-
59.1	-	416.7*	-	-	-	-
65.6	253.5	421.1	-	-	-	-
72.2	231.5	421.1	-	-	-	-
78.7	212.7	416.7	-	-	-	407.9
85.3	196.2	414.5	-	-	-	407.9
91.9	181.9	410.1	-	-	-	407.9
98.4	169.8	405.7	-	-	-	407.9
111.5	148.8	394.6	-	-	-	403.4
121.4	133.1	368.2	390.2	-	-	400.1
124.7	127.9	359.4	390.2	-	-	399.0
137.8	110.2	306.4	388.0	-	-	394.6
150.9	97.7	260.1	372.6	-	-	362.3
164.0	86.9	220.5	321.9	-	-	329.2
167.3	84.5	209.8	310.3	-	-	320.8
170.6	82.2	199.2	298.7	308.6	-	312.3
173.9	79.8	188.5	287.2	302.0	-	303.9
177.2	-	-	275.6	295.4	-	295.4
190.3	-	-	235.9	271.2	-	269.0
200.1	-	-	206.1	254.6	-	250.2
203.4	-	-	-	249.1	-	244.7
216.5	-	-	-	231.5	222.7	222.7
226.4	-	-	-	218.3	211.3	210.0
229.7	-	-	-	-	207.2	205.8
242.8	-	-	-	-	194.0	189.6
249.3	-	-	-	-	188.5	178.6
255.9	-	-	-	-	-	167.6
269.0	-	-	-	-	-	149.2
282.2	-	-	-	-	-	133.4
295.3	-	-	-	-	-	114.6

157.5 ft + 196.9 ft

	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
ft	1,000 lb					
65.6	-	302.0*	-	-	-	-
72.2	-	302.0*	-	-	-	-
78.7	198.4	302.0	-	-	-	-
85.3	183.0	302.0	-	-	-	-
91.9	169.8	302.0	-	-	-	-
95.1	163.7	300.9	-	-	-	297.6
98.4	157.6	299.8	-	-	-	297.6
111.5	137.8	295.4	-	-	-	296.2
124.7	121.3	291.0	-	-	-	293.9
137.8	108.5	284.4	273.4	-	-	291.0
150.9	95.0	271.2	273.4	-	-	282.9
164.0	84.0	235.9	273.4	-	-	276.3
177.2	74.7	206.1	273.4	-	-	269.0
190.3	66.8	179.7	249.1	-	-	261.6
193.6	65.1	173.3	241.7	233.7	-	259.8
203.4	60.2	154.3	219.4	233.7	-	246.9
210.0	57.1	140.0	205.6	231.5	-	235.9
216.5	-	-	191.8	229.3	-	224.9
229.7	-	-	167.6	212.7	-	208.0
239.5	-	-	146.6	202.8	-	195.7
242.8	-	-	-	199.5	189.6	191.8
255.9	-	-	-	176.4	177.5	177.5
262.5	-	-	-	163.1	172.5	170.1
269.0	-	-	-	-	167.6	162.8
282.2	-	-	-	-	157.6	147.0
288.7	-	-	-	-	153.2	138.5
295.3	-	-	-	-	-	130.1
308.4	-	-	-	-	-	117.2
321.5	-	-	-	-	-	103.6
334.6	-	-	-	-	-	92.4

0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

157.5 ft + 236.2 ft

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
75.5	-	220.5*	-	-	-	-
78.7	-	219.4*	-	-	-	-
85.3	-	218.3*	-	-	-	-
88.6	163.1	219.4	-	-	-	-
91.9	157.6	218.3	-	-	-	-
98.4	146.6	218.3	-	-	-	-
108.3	132.6	216.6	-	-	-	215.0
111.5	127.9	216.1	-	-	-	214.6
124.7	112.4	212.7	-	-	-	212.7
137.8	99.4	209.4	-	-	-	210.5
150.9	88.6	205.0	-	-	-	206.1
154.2	86.3	203.9	192.9	-	-	205.0
164.0	79.4	200.6	192.9	-	-	201.7
177.2	71.2	197.3	192.9	-	-	197.3
190.3	63.3	190.7	192.9	-	-	191.8
203.4	56.4	169.8	192.9	-	-	186.3
213.3	51.6	154.9	192.9	159.8	-	183.0
216.5	50.0	149.9	192.9	159.8	-	181.9
229.7	44.8	132.3	179.7	159.8	-	176.4
242.8	39.9	114.6	159.8	159.8	-	171.2
249.3	37.9	104.7	151.0	159.8	-	168.7
255.9	-	-	142.2	159.8	-	165.3
269.0	-	-	124.6	159.8	137.8	160.9
275.6	-	-	115.7	156.2	137.8	158.7
282.2	-	-	-	148.8	137.8	153.2
295.3	-	-	-	132.3	137.8	142.2
301.8	-	-	-	123.5	137.2	134.8
308.4	-	-	-	-	136.7	127.5
321.5	-	-	-	-	129.0	113.7
324.8	-	-	-	-	127.9	110.5
334.6	-	-	-	-	-	104.3
347.8	-	-	-	-	-	92.2
360.9	-	-	-	-	-	79.6
370.7	-	-	-	-	-	73.9

157.5 ft + 275.6 ft

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
82.0	-	158.7*	-	-	-	-
85.3	-	157.6*	-	-	-	-
91.9	-	156.5*	-	-	-	-
98.4	134.5	155.4	-	-	-	-
111.5	116.8	154.3	-	-	-	-
121.4	106.3	152.7	-	-	-	151.0
124.7	102.7	152.1	-	-	-	150.6
137.8	90.4	148.8	-	-	-	148.8
150.9	80.0	146.6	-	-	-	145.9
164.0	71.2	144.4	-	-	-	142.9
170.6	67.2	142.7	134.5	-	-	141.5
177.2	63.3	141.1	134.5	-	-	140.0
190.3	56.7	138.9	134.5	-	-	136.3
203.4	50.7	136.7	134.5	-	-	132.6
216.5	45.4	134.5	133.4	-	-	129.0
229.7	40.6	132.3	133.4	-	-	126.0
236.2	38.1	129.0	132.8	110.2	-	124.6
242.8	35.7	125.7	132.3	110.2	-	122.4
255.9	31.5	111.3	132.3	110.2	-	119.0
269.0	27.6	99.0	131.2	110.2	-	115.4
282.2	24.3	85.5	120.2	110.2	-	112.3
285.4	23.4	81.8	117.0	110.2	-	111.7
295.3	-	-	107.6	110.2	-	109.8
298.6	-	-	104.4	110.2	93.9	108.9
308.4	-	-	94.6	110.2	93.9	106.9
315.0	-	-	87.3	110.2	93.9	105.6
321.5	-	-	-	110.2	93.9	104.3
334.6	-	-	-	101.2	93.9	101.6
341.2	-	-	-	94.4	93.9	98.8
347.8	-	-	-	-	93.9	96.3
360.9	-	-	-	-	93.9	88.8
364.2	-	-	-	-	93.9	87.0
374.0	-	-	-	-	-	81.4
387.1	-	-	-	-	-	70.5
400.3	-	-	-	-	-	60.1
410.1	-	-	-	-	-	55.3

0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1

SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

157.5 ft + 315.0 ft

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
91.9	-	114.6*	-	-	-	-
98.4	-	113.5*	-	-	-	-
108.3	110.0	112.4	-	-	-	-
111.5	107.6	111.3	-	-	-	-
124.7	93.5	110.2	-	-	-	-
134.5	84.7	108.9	-	-	-	108.5
137.8	81.8	108.5	-	-	-	108.0
150.9	71.9	106.5	-	-	-	106.3
164.0	63.3	104.5	-	-	-	104.1
177.2	55.8	102.5	-	-	-	101.6
187.0	50.8	101.0	94.1	-	-	99.6
190.3	49.2	100.5	94.1	-	-	99.0
203.4	43.4	98.5	93.9	-	-	96.2
216.5	38.1	96.6	93.5	-	-	93.3
229.7	33.5	94.6	92.8	-	-	90.6
242.8	29.3	92.8	92.2	-	-	88.0
255.9	25.8	91.1	91.3	-	-	85.3
259.2	24.9	90.7	91.2	75.2	-	84.7
269.0	22.3	89.5	90.6	75.2	-	82.7
282.2	19.2	87.7	89.9	75.2	-	80.2
295.3	16.3	83.1	89.5	75.2	-	77.8
308.4	13.7	73.0	88.8	75.2	-	75.5
318.2	11.8	65.3	88.5	75.2	-	73.7
321.5	11.2	62.6	88.4	75.2	-	73.2
324.8	10.6	59.5	86.4	75.2	61.9	72.6
334.6	-	-	80.5	75.2	61.9	71.0
347.8	-	-	70.3	75.2	61.9	69.1
351.1	-	-	67.7	75.2	61.9	68.6
360.9	-	-	-	75.2	61.9	67.3
374.0	-	-	-	75.2	61.9	65.7
377.3	-	-	-	73.6	61.9	65.3
387.1	-	-	-	-	61.9	64.2
400.3	-	-	-	-	61.9	62.5
403.5	-	-	-	-	61.9	62.1
413.4	-	-	-	-	-	60.6
426.5	-	-	-	-	-	51.4
439.6	-	-	-	-	-	43.7
449.5	-	-	-	-	-	38.4

177.2 ft + 78.7 ft

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
39.4	-	738.5*	-	-	-	-
45.9	-	720.9*	-	-	-	-
49.2	370.4	751.8	-	-	-	-
52.5	348.3	743.0	-	-	-	-
55.8	330.7	734.1	-	-	-	718.7
59.1	313.1	725.3	-	-	-	718.7
65.6	282.2	696.7	-	-	-	712.1
72.2	257.9	670.2	-	-	-	705.5
78.7	238.1	632.7	-	-	-	698.9
85.3	220.5	604.1	-	-	-	694.5
91.9	199.5	520.3	-	-	-	643.8
95.1	190.7	478.4	617.3	-	-	619.5
98.4	181.9	436.5	597.5	-	-	595.2
111.5	-	-	524.7	-	-	520.3
124.7	-	-	467.4	-	-	455.6
128.0	-	-	456.4	-	-	442.0
137.8	-	-	-	403.4	-	401.2
150.9	-	-	-	361.6	-	358.6
157.5	-	-	-	343.9	-	337.3
164.0	-	-	-	-	-	320.4
173.9	-	-	-	-	295.4	295.1
177.2	-	-	-	-	288.8	286.6
183.7	-	-	-	-	275.6	273.4
190.3	-	-	-	-	-	260.1
203.4	-	-	-	-	-	233.3
216.5	-	-	-	-	-	206.1
229.7	-	-	-	-	-	179.1
236.2	-	-	-	-	-	168.7



0 lb 143,300 lb 275,600 lb 363,800 lb
452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

 **363,800 lb +**  **110,200 lb**  **36.1-62.3 ft**  **27.6 ft**  **32.2 ft/s** **360°** **75%**

 **177.2 ft +**  **118.1 ft**

	SWSL-1					SFSL-1
	0 lb					
	0 lb - 716,600 lb					
	85°	87/85°	75°	65°	55°	15°
ft						
49.2	-	529.1*	-	-	-	-
52.5	-	524.7*	-	-	-	-
59.1	288.8	537.9	-	-	-	-
65.6	262.4	531.3	-	-	-	-
68.9	251.3	526.9	-	-	-	515.9
72.2	240.3	522.5	-	-	-	515.9
78.7	220.5	513.7	-	-	-	515.9
85.3	203.9	502.7	-	-	-	515.9
91.9	189.6	489.4	-	-	-	511.5
98.4	176.4	474.0	-	-	-	509.3
108.3	157.4	431.0	511.5	-	-	496.0
111.5	151.0	416.7	511.5	-	-	493.8
124.7	130.1	339.5	463.0	-	-	462.2
131.2	121.8	300.9	439.8	-	-	435.0
137.8	113.5	262.4	416.7	-	-	407.9
150.9	-	-	374.8	-	-	363.8
157.5	-	-	341.7	339.5	-	341.7
164.0	-	-	308.6	324.1	-	324.8
167.3	-	-	291.0	316.9	-	316.4
177.2	-	-	-	295.4	-	291.0
190.3	-	-	-	271.2	-	264.6
196.9	-	-	-	262.4	-	251.3
200.1	-	-	-	-	244.7	246.0
203.4	-	-	-	-	240.3	240.7
216.5	-	-	-	-	222.7	219.4
223.1	-	-	-	-	216.1	210.5
229.7	-	-	-	-	-	201.7
242.8	-	-	-	-	-	182.2
255.9	-	-	-	-	-	158.7
269.0	-	-	-	-	-	139.6
275.6	-	-	-	-	-	131.2

 **177.2 ft +**  **157.5 ft**

	SWSL-1					SFSL-1
	0 lb					
	0 lb - 716,600 lb					
	85°	87/85°	75°	65°	55°	15°
ft						
55.8	-	385.8*	-	-	-	-
59.1	-	383.6*	-	-	-	-
65.6	-	379.2*	-	-	-	-
68.9	231.5	388.0	-	-	-	-
72.2	222.7	385.8	-	-	-	-
78.7	205.0	383.6	-	-	-	-
82.0	197.3	381.4	-	-	-	374.8
85.3	189.6	379.2	-	-	-	374.8
91.9	175.3	377.0	-	-	-	374.8
98.4	163.1	370.4	-	-	-	374.8
111.5	143.3	359.4	-	-	-	372.6
124.7	126.8	348.3	361.6	-	-	368.9
137.8	110.2	315.3	359.4	-	-	366.0
150.9	97.2	269.0	359.4	-	-	350.5
164.0	86.4	229.3	335.1	-	-	327.0
167.3	84.1	218.6	325.2	-	-	318.6
173.9	79.4	197.3	305.3	-	-	301.7
177.2	-	-	295.4	-	-	293.2
180.4	-	-	284.9	284.4	-	286.6
190.3	-	-	253.5	266.8	-	266.8
203.4	-	-	215.0	246.9	-	242.5
216.5	-	-	-	229.3	-	220.5
229.7	-	-	-	213.8	202.8	203.6
232.9	-	-	-	209.4	199.5	199.3
242.8	-	-	-	-	189.6	187.8
255.9	-	-	-	-	177.5	173.1
262.5	-	-	-	-	173.1	165.7
269.0	-	-	-	-	-	158.4
282.2	-	-	-	-	-	141.5
295.3	-	-	-	-	-	124.6
308.4	-	-	-	-	-	109.9
311.7	-	-	-	-	-	106.3

 0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1

SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

177.2 ft + 196.9 ft

	SWSL-1					SFSL-1
	0 lb					
	0 lb - 716,600 lb					
	85°	87/85°	75°	65°	55°	15°
ft						
65.6	-	282.2*	-	-	-	-
72.2	-	280.0*	-	-	-	-
78.7	190.7	282.2	-	-	-	-
85.3	176.4	282.2	-	-	-	-
91.9	163.1	280.0	-	-	-	-
95.1	157.6	280.0	-	-	-	275.6
98.4	152.1	280.0	-	-	-	275.6
111.5	132.3	275.6	-	-	-	275.6
124.7	116.8	269.0	-	-	-	274.8
137.8	104.5	262.4	-	-	-	273.4
141.1	101.7	260.7	255.7	-	-	270.4
150.9	93.5	255.7	255.7	-	-	268.2
164.0	82.7	242.5	255.7	-	-	261.6
177.2	73.4	212.7	255.7	-	-	255.7
190.3	65.7	185.2	255.7	-	-	248.4
200.1	60.7	165.3	237.5	219.4	-	241.0
203.4	59.1	158.7	231.5	219.4	-	237.4
206.7	57.6	151.8	224.6	218.3	-	233.7
213.3	54.7	137.8	210.8	218.3	-	226.3
216.5	-	-	203.9	218.3	-	222.7
229.7	-	-	178.6	208.3	-	205.0
242.8	-	-	152.1	195.1	-	189.2
255.9	-	-	-	183.0	173.1	174.2
269.0	-	-	-	168.7	162.0	161.7
272.3	-	-	-	162.0	159.8	158.5
282.2	-	-	-	-	153.2	149.9
295.3	-	-	-	-	144.4	138.9
298.6	-	-	-	-	142.2	135.2
308.4	-	-	-	-	-	124.2
321.5	-	-	-	-	-	109.5
334.6	-	-	-	-	-	99.9
347.8	-	-	-	-	-	85.1
351.1	-	-	-	-	-	81.4

177.2 ft + 236.2 ft

	SWSL-1					SFSL-1
	0 lb					
	0 lb - 716,600 lb					
	85°	87/85°	75°	65°	55°	15°
ft						
75.5	-	208.3*	-	-	-	-
78.7	-	207.2*	-	-	-	-
85.3	-	206.1*	-	-	-	-
88.6	156.5	207.2	-	-	-	-
91.9	151.0	206.1	-	-	-	-
98.4	140.0	206.1	-	-	-	-
108.3	126.8	204.5	-	-	-	202.8
111.5	122.4	203.9	-	-	-	202.8
124.7	107.8	201.7	-	-	-	202.1
137.8	95.5	198.4	-	-	-	200.6
150.9	84.9	195.1	-	-	-	196.9
157.5	80.5	193.5	181.9	-	-	195.1
164.0	76.1	191.8	181.9	-	-	192.9
177.2	68.3	187.4	181.9	-	-	188.5
190.3	61.5	184.1	181.9	-	-	184.1
203.4	55.1	173.1	181.9	-	-	178.6
216.5	48.9	153.2	181.9	-	-	174.2
223.1	46.3	144.4	181.9	151.0	-	172.0
229.7	43.7	135.6	181.9	151.0	-	169.8
242.8	39.0	116.8	167.6	151.0	-	165.1
249.3	36.8	108.2	158.7	151.0	-	162.5
255.9	-	-	149.9	151.0	-	159.8
269.0	-	-	132.3	151.0	-	155.4
282.2	-	-	113.5	151.0	130.1	148.4
295.3	-	-	-	143.3	130.1	138.9
308.4	-	-	-	126.8	130.1	129.3
311.7	-	-	-	122.4	128.7	126.9
321.5	-	-	-	-	124.6	119.4
334.6	-	-	-	-	117.9	108.0
337.9	-	-	-	-	116.8	104.9
347.8	-	-	-	-	-	95.7
360.9	-	-	-	-	-	85.0
374.0	-	-	-	-	-	76.1
387.1	-	-	-	-	-	63.9
390.4	-	-	-	-	-	61.5

0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

177.2 ft + 275.6 ft

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
85.3	-	151.0*	-	-	-	-
91.9	-	149.9*	-	-	-	-
98.4	129.0	148.8	-	-	-	-
111.5	112.4	147.7	-	-	-	-
121.4	101.9	146.1	-	-	-	145.5
124.7	98.3	145.5	-	-	-	145.1
137.8	86.4	143.3	-	-	-	143.3
150.9	76.3	141.1	-	-	-	141.1
164.0	67.7	138.9	-	-	-	138.5
173.9	62.1	137.2	127.9	-	-	136.3
177.2	60.2	136.7	127.9	-	-	135.6
190.3	53.8	134.5	127.9	-	-	132.6
203.4	48.1	131.2	127.9	-	-	129.3
216.5	42.8	129.0	127.9	-	-	125.7
229.7	38.1	127.9	127.9	-	-	122.1
242.8	34.2	125.7	127.9	-	-	119.4
246.1	33.2	122.9	127.9	104.9	-	118.5
255.9	30.4	114.6	127.9	104.9	-	115.7
269.0	26.7	101.4	127.9	104.9	-	112.8
282.2	23.4	88.0	125.7	104.9	-	109.9
288.7	21.8	80.7	119.0	104.9	-	108.4
295.3	-	-	112.4	104.9	-	106.9
308.4	-	-	100.3	104.9	88.4	104.1
318.2	-	-	90.2	104.9	88.4	101.9
321.5	-	-	-	104.9	88.4	101.2
334.6	-	-	-	104.9	88.4	98.5
347.8	-	-	-	96.8	88.4	96.0
360.9	-	-	-	-	88.4	90.9
374.0	-	-	-	-	88.4	83.1
387.1	-	-	-	-	-	72.8
400.3	-	-	-	-	-	65.5
413.4	-	-	-	-	-	56.7
426.5	-	-	-	-	-	47.0

177.2 ft + 315.0 ft

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
91.9	-	110.2*	-	-	-	-
98.4	-	109.6*	-	-	-	-
108.3	104.9	108.0	-	-	-	-
111.5	102.5	107.6	-	-	-	-
124.7	89.1	106.0	-	-	-	-
134.5	80.6	104.7	-	-	-	104.3
137.8	77.8	104.3	-	-	-	103.8
150.9	68.1	102.5	-	-	-	102.2
164.0	59.7	100.8	-	-	-	100.4
177.2	52.7	99.0	-	-	-	98.3
190.3	46.3	97.0	89.7	-	-	95.8
203.4	40.8	95.2	89.7	-	-	93.3
216.5	35.7	93.3	89.7	-	-	90.6
229.7	31.3	91.5	89.5	-	-	88.2
242.8	27.1	89.7	89.1	-	-	85.6
255.9	23.6	88.2	88.4	-	-	83.1
269.0	20.3	86.6	88.0	71.0	-	80.6
282.2	17.2	85.1	87.5	71.0	-	78.3
295.3	14.6	83.3	86.9	71.0	-	75.8
308.4	12.1	75.0	86.6	71.0	-	73.6
321.5	9.7	64.6	86.2	71.0	-	71.4
324.8	9.3	61.9	85.9	71.0	-	70.9
334.6	-	-	84.9	71.0	-	69.2
337.9	-	-	82.4	71.0	58.0	68.7
347.8	-	-	75.0	71.0	58.0	67.3
357.6	-	-	67.0	71.0	58.0	65.9
360.9	-	-	-	71.0	58.0	65.5
374.0	-	-	-	71.0	58.0	63.9
387.1	-	-	-	71.0	58.0	62.3
400.3	-	-	-	-	58.0	60.8
413.4	-	-	-	-	58.0	59.5
426.5	-	-	-	-	-	55.3
439.6	-	-	-	-	-	48.1
452.8	-	-	-	-	-	39.5
465.9	-	-	-	-	-	33.1

0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

 363,800 lb +  110,200 lb		 36.1-62.3 ft		 27.6 ft		 32.2 ft/s		360°		75%	
 196.9 ft +  78.7 ft											
SWSL_1 SFSL_1											
0 lb 0 lb - 716,600 lb											
85° 87/85° 75° 65° 55° 15°											
ft 1,000 lb											
39.4	-	665.8*	-	-	-	-	-	-	-	-	-
45.9	-	650.4*	-	-	-	-	-	-	-	-	-
52.5	332.9	670.2	-	-	-	-	-	-	-	-	-
55.8	315.3	663.6	-	-	-	-	643.8	-	-	-	-
59.1	299.8	654.8	-	-	-	-	643.8	-	-	-	-
65.6	271.2	637.1	-	-	-	-	643.8	-	-	-	-
72.2	249.1	617.3	-	-	-	-	639.3	-	-	-	-
78.7	229.3	586.4	-	-	-	-	630.5	-	-	-	-
85.3	211.6	562.2	-	-	-	-	626.1	-	-	-	-
91.9	197.3	533.5	-	-	-	-	619.5	-	-	-	-
98.4	180.8	449.7	590.8	-	-	-	593.0	-	-	-	-
111.5	-	-	518.1	-	-	-	516.6	-	-	-	-
124.7	-	-	463.0	-	-	-	451.9	-	-	-	-
134.5	-	-	427.7	-	-	-	412.3	-	-	-	-
137.8	-	-	-	-	-	-	399.0	-	-	-	-
144.4	-	-	-	374.8	-	-	377.0	-	-	-	-
150.9	-	-	-	357.1	-	-	354.9	-	-	-	-
164.0	-	-	-	324.1	-	-	316.0	-	-	-	-
167.3	-	-	-	315.3	-	-	307.5	-	-	-	-
177.2	-	-	-	-	-	-	282.2	-	-	-	-
183.7	-	-	-	-	-	269.0	269.7	-	-	-	-
190.3	-	-	-	-	-	257.9	257.2	-	-	-	-
196.9	-	-	-	-	-	249.1	244.7	-	-	-	-
203.4	-	-	-	-	-	-	233.7	-	-	-	-
216.5	-	-	-	-	-	-	212.7	-	-	-	-
229.7	-	-	-	-	-	-	190.7	-	-	-	-
242.8	-	-	-	-	-	-	166.4	-	-	-	-
252.6	-	-	-	-	-	-	153.2	-	-	-	-

	0 lb	143,300 lb	275,600 lb	363,800 lb
	452,000 lb	540,200 lb	628,400 lb	716,600 lb

 196.9 ft +  118.1 ft											
SWSL_1 SFSL_1											
0 lb 0 lb - 716,600 lb											
85° 87/85° 75° 65° 55° 15°											
ft 1,000 lb											
49.2	-	482.8*	-	-	-	-	-	-	-	-	-
52.5	-	478.4*	-	-	-	-	-	-	-	-	-
59.1	-	489.4	-	-	-	-	-	-	-	-	-
62.3	264.6	487.2	-	-	-	-	-	-	-	-	-
65.6	251.3	485.0	-	-	-	-	-	-	-	-	-
68.9	240.3	481.7	-	-	-	-	-	-	-	467.4	-
72.2	229.3	478.4	-	-	-	-	-	-	-	467.4	-
78.7	211.6	469.6	-	-	-	-	-	-	-	467.4	-
85.3	196.2	458.6	-	-	-	-	-	-	-	467.4	-
91.9	181.9	447.5	-	-	-	-	-	-	-	467.4	-
98.4	169.8	436.5	-	-	-	-	-	-	-	465.2	-
111.5	149.9	410.1	-	-	-	-	-	-	-	458.6	-
114.8	144.7	393.0	467.4	-	-	-	-	-	-	458.6	-
124.7	129.0	341.7	456.4	-	-	-	-	-	-	440.2	-
131.2	120.7	304.2	433.2	-	-	-	-	-	-	421.8	-
137.8	112.4	266.8	410.1	-	-	-	-	-	-	403.4	-
150.9	-	-	370.4	-	-	-	-	-	-	359.4	-
164.0	-	-	330.7	-	-	-	-	-	-	320.4	-
167.3	-	-	312.0	310.9	-	-	-	-	-	312.0	-
170.6	-	-	293.2	302.0	-	-	-	-	-	303.5	-
177.2	-	-	-	288.8	-	-	-	-	-	286.6	-
190.3	-	-	-	266.8	-	-	-	-	-	260.1	-
203.4	-	-	-	246.9	-	-	-	-	-	236.6	-
213.3	-	-	-	-	-	-	-	-	220.5	221.2	-
216.5	-	-	-	-	-	-	-	-	216.1	216.1	-
229.7	-	-	-	-	-	-	-	-	201.7	197.9	-
232.9	-	-	-	-	-	-	-	-	198.4	193.7	-
242.8	-	-	-	-	-	-	-	-	-	182.2	-
255.9	-	-	-	-	-	-	-	-	-	167.6	-
269.0	-	-	-	-	-	-	-	-	-	147.7	-
282.2	-	-	-	-	-	-	-	-	-	129.0	-
292.0	-	-	-	-	-	-	-	-	-	119.0	-

	27.6 ft		32.2 ft/s	360°	75%			
	196.9 ft +		118.1 ft					
		SWSL_1				SFSL_1		
		0 lb	0 lb - 716,600 lb					
		85°	87/85°	75°	65°	55°		15°
ft		1,000 lb						
49.2	-	482.8*	-	-	-	-	-	
52.5	-	478.4*	-	-	-	-	-	
59.1	-	489.4	-	-	-	-	-	
62.3	264.6	487.2	-	-	-	-	-	
65.6	251.3	485.0	-	-	-	-	-	
68.9	240.3	481.7	-	-	-	467.4		
72.2	229.3	478.4	-	-	-	467.4		
78.7	211.6	469.6	-	-	-	467.4		
85.3	196.2	458.6	-	-	-	467.4		
91.9	181.9	447.5	-	-	-	467.4		
98.4	169.8	436.5	-	-	-	465.2		
111.5	149.9	410.1	-	-	-	458.6		
114.8	144.7	393.0	467.4	-	-	458.6		
124.7	129.0	341.7	456.4	-	-	440.2		
131.2	120.7	304.2	433.2	-	-	421.8		
137.8	112.4	266.8	410.1	-	-	403.4		
150.9	-	-	370.4	-	-	359.4		
164.0	-	-	330.7	-	-	320.4		
167.3	-	-	312.0	310.9	-	312.0		
170.6	-	-	293.2	302.0	-	303.5		
177.2	-	-	-	288.8	-	286.6		
190.3	-	-	-	266.8	-	260.1		
203.4	-	-	-	246.9	-	236.6		
213.3	-	-	-	-	220.5	221.2		
216.5	-	-	-	-	216.1	216.1		
229.7	-	-	-	-	201.7	197.9		
232.9	-	-	-	-	198.4	193.7		
242.8	-	-	-	-	-	182.2		
255.9	-	-	-	-	-	167.6		
269.0	-	-	-	-	-	147.7		
282.2	-	-	-	-	-	129.0		
292.0	-	-	-	-	-	119.0		

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

 **363,800 lb +**  **110,200 lb**  **36.1-62.3 ft**  **27.6 ft**  **32.2 ft/s** **360°** **75%**

		SWSL-1					SFSL-1
		0 lb	0 lb - 716,600 lb				
		85°	87/85°	75°	65°	55°	15°
ft		1,000 lb					
59.1	-	352.7*	-	-	-	-	-
65.6	-	350.5*	-	-	-	-	-
72.2	212.7	357.1	-	-	-	-	-
78.7	196.2	354.9	-	-	-	-	-
82.0	188.5	352.7	-	-	-	-	346.1
85.3	180.8	350.5	-	-	-	-	346.1
91.9	168.7	348.3	-	-	-	-	346.1
98.4	156.5	343.9	-	-	-	-	346.1
111.5	137.8	332.9	-	-	-	-	346.1
124.7	121.3	321.9	-	-	-	-	341.7
131.2	115.2	315.3	337.3	-	-	-	341.7
137.8	109.1	308.6	335.1	-	-	-	341.7
150.9	95.9	269.0	335.1	-	-	-	334.4
164.0	84.9	229.3	330.7	-	-	-	318.9
170.6	80.5	207.8	316.4	-	-	-	305.0
177.2	76.1	186.3	302.0	-	-	-	291.0
187.0	-	-	273.9	266.8	-	-	270.1
190.3	-	-	264.6	260.1	-	-	263.1
203.4	-	-	224.9	240.3	-	-	238.8
210.0	-	-	205.0	231.5	-	-	228.5
216.5	-	-	-	222.7	-	-	218.3
229.7	-	-	-	208.3	-	-	199.9
239.5	-	-	-	198.4	186.3	-	188.1
242.8	-	-	-	195.1	183.0	-	184.5
255.9	-	-	-	-	172.0	-	169.8
269.0	-	-	-	-	162.0	-	156.5
272.3	-	-	-	-	159.8	-	153.2
282.2	-	-	-	-	-	-	143.7
295.3	-	-	-	-	-	-	131.2
308.4	-	-	-	-	-	-	114.6
321.5	-	-	-	-	-	-	101.5
331.4	-	-	-	-	-	-	91.9

		SWSL-1					SFSL-1
		0 lb	0 lb - 716,600 lb				
		85°	87/85°	75°	65°	55°	15°
ft		1,000 lb					
65.6	-	262.4*	-	-	-	-	-
72.2	-	262.4*	-	-	-	-	-
78.7	-	260.1*	-	-	-	-	-
82.0	175.3	264.6	-	-	-	-	-
85.3	168.7	262.4	-	-	-	-	-
91.9	156.5	262.4	-	-	-	-	-
98.4	145.5	260.1	-	-	-	-	257.9
111.5	126.8	255.7	-	-	-	-	257.9
124.7	112.4	251.3	-	-	-	-	257.2
137.8	100.1	244.7	-	-	-	-	255.7
147.6	92.2	239.8	238.1	-	-	-	253.5
150.9	89.5	238.1	238.1	-	-	-	252.8
164.0	80.7	231.5	238.1	-	-	-	249.1
177.2	72.8	211.6	238.1	-	-	-	244.7
190.3	65.0	184.1	238.1	-	-	-	236.6
203.4	58.4	157.6	238.1	-	-	-	229.3
206.7	57.0	151.0	231.2	-	-	-	227.1
210.0	55.5	144.4	224.3	206.1	-	-	224.9
213.3	54.0	137.8	217.4	206.1	-	-	222.7
216.5	-	-	210.5	206.1	-	-	220.5
229.7	-	-	184.1	203.9	-	-	202.8
242.8	-	-	158.7	190.7	-	-	186.3
249.3	-	-	145.5	184.1	-	-	178.6
255.9	-	-	-	178.6	-	-	170.9
265.7	-	-	-	170.3	159.8	-	161.5
269.0	-	-	-	167.6	157.6	-	158.4
282.2	-	-	-	155.4	147.7	-	146.6
295.3	-	-	-	-	140.0	-	135.6
308.4	-	-	-	-	132.3	-	126.0
311.7	-	-	-	-	130.1	-	123.6
321.5	-	-	-	-	-	-	114.8
334.6	-	-	-	-	-	-	101.9
347.8	-	-	-	-	-	-	89.3
360.9	-	-	-	-	-	-	79.4
367.5	-	-	-	-	-	-	73.2

 0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1

SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb **36.1-62.3 ft** **27.6 ft** **32.2 ft/s** **360°** **75%**

196.9 ft + 236.2 ft

	SWSL-1					SFSL-1
	0 lb	0 lb - 716,600 lb				
	85°	87/85°	75°	65°	55°	15°
ft						
75.5	-	196.2*	-	-	-	-
78.7	-	195.1*	-	-	-	-
85.3	-	194.0*	-	-	-	-
91.9	144.4	195.1	-	-	-	-
98.4	134.5	194.0	-	-	-	-
111.5	116.8	192.9	-	-	-	190.7
124.7	103.0	190.7	-	-	-	190.7
137.8	91.1	187.4	-	-	-	190.7
150.9	81.1	184.1	-	-	-	187.0
164.0	72.5	180.8	172.0	-	-	183.7
177.2	65.0	176.4	172.0	-	-	180.8
190.3	58.4	173.1	172.0	-	-	176.4
203.4	52.7	169.8	172.0	-	-	172.0
216.5	47.6	163.2	172.0	-	-	167.6
229.7	43.2	135.6	172.0	142.2	-	164.0
242.8	38.4	116.8	172.0	142.2	-	159.1
246.1	37.3	112.1	167.6	142.2	-	158.2
252.6	35.3	102.7	158.7	142.2	-	156.3
255.9	-	-	154.3	142.2	-	155.4
269.0	-	-	136.7	142.2	-	150.6
282.2	-	-	119.0	142.2	-	144.8
285.4	-	-	114.6	142.2	-	142.7
295.3	-	-	-	142.2	122.4	136.7
308.4	-	-	-	135.6	122.4	127.1
318.2	-	-	-	122.4	120.7	120.2
321.5	-	-	-	-	120.2	118.0
334.6	-	-	-	-	114.6	109.3
347.8	-	-	-	-	108.9	99.9
360.9	-	-	-	-	-	89.6
374.0	-	-	-	-	-	78.3
387.1	-	-	-	-	-	69.1
400.3	-	-	-	-	-	60.0
406.8	-	-	-	-	-	54.2

196.9 ft + 275.6 ft

	SWSL-1					SFSL-1
	0 lb	0 lb - 716,600 lb				
	85°	87/85°	75°	65°	55°	15°
ft						
85.3	-	143.3*	-	-	-	-
91.9	-	142.2*	-	-	-	-
98.4	-	141.1*	-	-	-	-
101.7	117.9	141.1	-	-	-	-
111.5	106.9	140.0	-	-	-	-
124.7	93.3	138.9	-	-	-	137.8
137.8	82.0	136.7	-	-	-	136.7
150.9	72.5	135.6	-	-	-	135.2
164.0	64.2	133.4	-	-	-	133.0
177.2	57.1	131.2	-	-	-	130.1
180.4	55.5	130.6	121.3	-	-	129.5
190.3	50.7	129.0	121.3	-	-	127.9
203.4	45.2	125.7	121.3	-	-	124.9
216.5	40.1	124.6	121.3	-	-	121.3
229.7	35.7	122.4	121.3	-	-	118.5
242.8	31.7	120.2	121.3	-	-	115.4
252.6	29.1	115.2	121.3	99.4	-	113.2
255.9	28.2	113.5	121.3	99.4	-	112.4
269.0	24.9	100.1	121.3	99.4	-	109.8
282.2	22.0	86.9	121.3	99.4	-	106.9
288.7	20.7	79.6	118.5	99.4	-	105.5
295.3	-	-	115.7	99.4	-	104.1
308.4	-	-	102.7	99.4	-	101.0
321.5	-	-	89.3	99.4	83.6	98.3
324.8	-	-	85.8	99.4	83.6	97.7
334.6	-	-	-	99.4	83.6	95.7
347.8	-	-	-	99.4	83.6	93.1
357.6	-	-	-	92.8	83.6	90.9
360.9	-	-	-	-	83.6	89.9
374.0	-	-	-	-	83.6	85.8
387.1	-	-	-	-	83.6	76.7
400.3	-	-	-	-	-	67.1
413.4	-	-	-	-	-	57.8
426.5	-	-	-	-	-	50.7
439.6	-	-	-	-	-	42.3
442.9	-	-	-	-	-	39.9

0 lb **143,300 lb** **275,600 lb** **363,800 lb** **452,000 lb** **540,200 lb** **628,400 lb** **716,600 lb**

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

 **363,800 lb +  110,200 lb**  **36.1-62.3 ft**  **27.6 ft**  **32.2 ft/s** **360°** **75%**

 **196.9 ft +  315.0 ft**

ft	SWSL-1					SFSL-1
	0 lb					
	85°	87/85°	75°	65°	55°	15°
	1,000 lb					
95.1	-	104.9*	-	-	-	-
98.4	-	104.5*	-	-	-	-
111.5	97.2	102.7	-	-	-	-
124.7	84.2	101.4	-	-	-	-
137.8	73.4	99.9	-	-	-	99.4
150.9	64.2	98.3	-	-	-	98.1
164.0	56.2	96.8	-	-	-	96.5
177.2	49.4	95.0	-	-	-	94.6
190.3	43.2	93.3	-	-	-	92.4
196.9	40.6	92.4	85.3	-	-	91.3
203.4	37.9	91.5	85.3	-	-	90.1
216.5	33.1	89.7	85.3	-	-	87.7
229.7	28.7	88.0	85.3	-	-	85.4
242.8	24.9	86.4	85.3	-	-	83.0
255.9	21.4	84.9	85.1	-	-	80.5
269.0	18.1	83.3	84.7	-	-	78.3
275.6	16.6	82.6	84.5	67.0	-	77.2
282.2	15.2	81.8	84.4	67.0	-	76.0
295.3	12.6	80.2	84.0	67.0	-	73.9
308.4	10.1	73.9	83.8	67.0	-	71.7
315.0	9.0	68.8	83.7	67.0	-	70.5
321.5	-	63.5	83.6	67.0	-	69.5
328.1	-	57.8	83.2	67.0	-	68.5
334.6	-	-	83.1	67.0	-	67.5
347.8	-	-	76.7	67.0	54.2	65.6
360.9	-	-	66.1	67.0	54.2	63.7
374.0	-	-	-	67.0	54.2	61.9
387.1	-	-	-	67.0	54.2	60.5
393.7	-	-	-	67.0	54.2	59.7
400.3	-	-	-	-	54.2	59.0
413.4	-	-	-	-	54.2	57.5
423.2	-	-	-	-	54.2	55.6
426.5	-	-	-	-	-	54.9
439.6	-	-	-	-	-	48.1
452.8	-	-	-	-	-	42.3
465.9	-	-	-	-	-	34.8
479.0	-	-	-	-	-	26.8
482.3	-	-	-	-	-	24.7

 **216.5 ft +  78.7 ft**

ft	SWSL-1					SFSL-1
	0 lb					
	85°	87/85°	75°	65°	55°	15°
	1,000 lb					
42.7	-	575.4*	-	-	-	-
45.9	-	568.8*	-	-	-	-
52.5	319.7	588.6	-	-	-	-
59.1	286.6	575.4	-	-	-	562.2
65.6	260.1	562.2	-	-	-	562.2
72.2	238.1	544.5	-	-	-	562.2
78.7	220.5	529.1	-	-	-	555.6
85.3	203.9	511.5	-	-	-	555.6
91.9	189.6	493.8	-	-	-	551.2
95.1	184.1	479.5	-	-	-	544.5
98.4	178.6	471.8	-	-	-	544.5
101.7	172.0	432.1	-	-	-	531.3
105.0	-	-	546.7	-	-	520.3
111.5	-	-	513.7	-	-	498.2
124.7	-	-	458.6	-	-	449.7
137.8	-	-	412.3	-	-	396.8
150.9	-	-	-	-	-	352.7
154.2	-	-	-	341.7	-	341.7
164.0	-	-	-	317.5	-	314.5
173.9	-	-	-	297.6	-	290.3
177.2	-	-	-	-	-	282.2
190.3	-	-	-	-	-	255.7
196.9	-	-	-	-	242.5	242.5
203.4	-	-	-	-	233.7	231.5
206.7	-	-	-	-	229.3	226.0
216.5	-	-	-	-	-	210.5
229.7	-	-	-	-	-	192.9
242.8	-	-	-	-	-	174.9
255.9	-	-	-	-	-	156.5
269.0	-	-	-	-	-	136.2
272.3	-	-	-	-	-	133.4

 **0 lb** **143,300 lb** **275,600 lb** **363,800 lb** **452,000 lb** **540,200 lb** **628,400 lb** **716,600 lb**

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

216.5 ft + 118.1 ft

	SWSL-1					SFSL-1
	0 lb					
	85°	87/85°	75°	65°	55°	15°
ft						
49.2	-	427.7*	-	-	-	-
52.5	-	425.5*	-	-	-	-
59.1	-	416.7*	-	-	-	-
62.3	253.5	432.1	-	-	-	-
65.6	240.3	429.9	-	-	-	-
72.2	220.5	423.3	-	-	-	414.5
78.7	203.9	416.7	-	-	-	414.5
85.3	188.5	407.9	-	-	-	414.5
91.9	175.3	399.0	-	-	-	414.5
98.4	164.2	388.0	-	-	-	414.5
111.5	144.4	368.2	-	-	-	410.1
118.1	136.1	359.4	412.3	-	-	410.1
124.7	127.9	350.5	412.3	-	-	402.7
131.2	119.6	315.3	407.9	-	-	402.0
137.8	111.3	280.0	405.7	-	-	401.2
141.1	108.5	260.1	396.3	-	-	390.6
150.9	-	-	368.2	-	-	358.6
164.0	-	-	332.9	-	-	320.4
177.2	-	-	288.8	284.4	-	286.6
190.3	-	-	-	262.4	-	258.7
203.4	-	-	-	242.5	-	234.4
213.3	-	-	-	229.3	-	219.0
216.5	-	-	-	-	-	213.8
223.1	-	-	-	-	203.9	205.0
229.7	-	-	-	-	197.3	196.2
242.8	-	-	-	-	184.1	180.0
246.1	-	-	-	-	181.9	176.4
255.9	-	-	-	-	-	165.3
269.0	-	-	-	-	-	152.9
282.2	-	-	-	-	-	138.2
295.3	-	-	-	-	-	121.3
308.4	-	-	-	-	-	108.5

216.5 ft + 157.5 ft

	SWSL-1					SFSL-1
	0 lb					
	85°	87/85°	75°	65°	55°	15°
ft						
59.1	-	317.5*	-	-	-	-
65.6	-	313.1*	-	-	-	-
72.2	203.9	319.7	-	-	-	-
78.7	188.5	317.5	-	-	-	-
85.3	174.2	315.3	-	-	-	308.6
91.9	162.0	310.9	-	-	-	308.6
98.4	151.0	306.4	-	-	-	308.6
111.5	132.3	297.6	-	-	-	308.6
124.7	116.8	286.6	-	-	-	306.4
134.5	108.1	278.3	299.8	-	-	306.4
137.8	105.2	275.6	299.8	-	-	306.4
150.9	94.6	264.6	299.8	-	-	301.3
164.0	84.7	235.9	299.8	-	-	294.7
170.6	80.1	215.5	296.5	-	-	291.7
177.2	75.6	195.1	295.4	-	-	288.8
190.3	-	-	275.6	-	-	262.4
196.9	-	-	260.1	246.9	-	249.1
203.4	-	-	244.7	238.1	-	238.5
216.5	-	-	202.8	220.5	-	217.2
229.7	-	-	-	205.0	-	198.4
242.8	-	-	-	191.8	-	182.2
249.3	-	-	-	186.3	-	174.9
252.6	-	-	-	-	170.9	171.2
255.9	-	-	-	-	167.6	167.6
269.0	-	-	-	-	157.6	155.1
282.2	-	-	-	-	148.8	143.3
295.3	-	-	-	-	-	132.3
308.4	-	-	-	-	-	121.3
321.5	-	-	-	-	-	108.4
334.6	-	-	-	-	-	93.7
347.8	-	-	-	-	-	83.8

0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

216.5 ft + 196.9 ft

	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
ft	1,000 lb					
68.9	-	238.1*	-	-	-	-
72.2	-	235.9*	-	-	-	-
78.7	-	233.7*	-	-	-	-
82.0	167.6	238.1	-	-	-	-
85.3	160.9	238.1	-	-	-	-
91.9	149.9	235.9	-	-	-	-
98.4	138.9	233.7	-	-	-	231.5
111.5	121.3	231.5	-	-	-	231.5
124.7	107.8	224.9	-	-	-	230.8
137.8	95.9	220.5	-	-	-	229.3
150.9	86.0	215.0	218.3	-	-	229.3
164.0	77.4	208.3	218.3	-	-	227.1
177.2	69.9	201.7	218.3	-	-	222.7
190.3	63.5	189.6	218.3	-	-	216.8
203.4	57.8	163.1	217.2	-	-	211.6
206.7	56.3	156.3	216.9	-	-	210.5
216.5	52.0	135.6	216.1	187.4	-	207.2
229.7	-	-	196.2	187.4	-	199.9
242.8	-	-	170.9	187.4	-	184.5
252.6	-	-	151.0	178.3	-	173.4
255.9	-	-	-	175.3	-	169.8
269.0	-	-	-	164.2	-	156.5
278.9	-	-	-	157.6	145.5	147.2
282.2	-	-	-	155.4	143.3	144.4
288.7	-	-	-	151.0	139.3	138.9
295.3	-	-	-	-	135.6	133.4
308.4	-	-	-	-	127.9	123.5
321.5	-	-	-	-	121.3	114.7
334.6	-	-	-	-	-	106.0
347.8	-	-	-	-	-	94.6
360.9	-	-	-	-	-	82.7
374.0	-	-	-	-	-	72.8
383.9	-	-	-	-	-	65.9

216.5 ft + 236.2 ft

	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
ft	1,000 lb					
78.7	-	178.6*	-	-	-	-
85.3	-	177.5*	-	-	-	-
91.9	137.8	178.6	-	-	-	-
98.4	127.9	177.5	-	-	-	-
111.5	111.3	176.4	-	-	-	174.2
124.7	98.3	174.2	-	-	-	174.2
137.8	87.1	170.9	-	-	-	174.2
150.9	77.4	167.6	-	-	-	172.0
164.0	69.2	164.2	-	-	-	169.8
167.3	67.4	163.4	155.4	-	-	169.2
177.2	61.9	160.9	155.4	-	-	167.6
190.3	55.6	157.6	155.4	-	-	163.9
203.4	50.0	153.2	155.4	-	-	160.2
216.5	45.2	149.9	155.4	-	-	156.5
229.7	40.8	137.8	155.4	-	-	152.7
239.5	38.0	124.6	155.4	131.2	-	150.1
242.8	37.0	120.2	155.4	131.2	-	149.2
246.1	36.2	115.4	155.4	131.2	-	148.3
252.6	34.4	106.0	155.4	131.2	-	146.4
255.9	-	-	155.4	131.2	-	145.5
269.0	-	-	144.4	131.2	-	140.7
282.2	-	-	126.8	131.2	-	137.1
292.0	-	-	112.4	131.2	-	134.3
295.3	-	-	-	131.2	-	133.4
305.1	-	-	-	131.2	112.4	126.8
308.4	-	-	-	131.2	112.4	124.6
321.5	-	-	-	126.8	112.4	114.8
328.1	-	-	-	120.2	111.2	110.5
334.6	-	-	-	-	110.0	106.3
347.8	-	-	-	-	104.3	98.2
360.9	-	-	-	-	99.0	90.2
374.0	-	-	-	-	-	82.2
387.1	-	-	-	-	-	71.9
400.3	-	-	-	-	-	61.6
413.4	-	-	-	-	-	55.3
423.2	-	-	-	-	-	47.4

0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1

SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

216.5 ft + 275.6 ft

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
85.3	-	132.3*	-	-	-	-
91.9	-	131.2*	-	-	-	-
98.4	-	130.1*	-	-	-	-
101.7	112.4	130.1	-	-	-	-
111.5	101.9	130.1	-	-	-	-
124.7	88.8	129.0	-	-	-	127.9
137.8	78.0	127.9	-	-	-	126.8
150.9	68.8	125.7	-	-	-	126.0
164.0	60.8	123.5	-	-	-	124.6
177.2	54.0	121.3	-	-	-	122.4
183.7	50.9	120.2	111.3	-	-	121.3
190.3	47.8	119.0	111.3	-	-	120.2
203.4	42.5	116.8	111.3	-	-	117.6
216.5	37.7	114.6	111.3	-	-	114.6
229.7	33.5	112.4	111.3	-	-	111.7
242.8	29.5	110.2	111.3	-	-	109.1
255.9	26.0	108.7	111.3	-	-	106.7
262.5	24.5	105.5	111.3	91.9	-	105.2
269.0	22.9	102.3	111.3	91.9	-	103.8
282.2	20.1	89.1	111.3	91.9	-	101.2
285.4	19.5	85.5	111.3	91.9	-	100.3
292.0	18.3	78.3	111.3	91.9	-	99.0
295.3	-	-	111.3	91.9	-	98.3
308.4	-	-	108.0	91.9	-	95.5
321.5	-	-	95.0	91.9	-	93.0
328.1	-	-	88.2	91.9	-	91.8
334.6	-	-	-	91.9	76.9	90.6
347.8	-	-	-	91.7	76.7	88.2
360.9	-	-	-	91.7	76.7	85.7
364.2	-	-	-	91.7	76.7	85.0
374.0	-	-	-	-	76.7	82.9
387.1	-	-	-	-	76.7	76.4
397.0	-	-	-	-	76.7	71.1
400.3	-	-	-	-	-	69.1
413.4	-	-	-	-	-	60.8
426.5	-	-	-	-	-	52.0
439.6	-	-	-	-	-	44.8
452.8	-	-	-	-	-	38.1
462.6	-	-	-	-	-	31.3

216.5 ft + 315.0 ft

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
95.1	-	97.4*	-	-	-	-
98.4	-	97.0*	-	-	-	-
111.5	92.2	95.7	-	-	-	-
124.7	79.8	94.6	-	-	-	-
137.8	69.4	93.5	-	-	-	92.8
150.9	60.6	91.9	-	-	-	91.8
164.0	52.9	90.6	-	-	-	90.5
177.2	46.3	89.1	-	-	-	89.1
190.3	40.3	87.5	-	-	-	87.2
203.4	35.3	86.0	78.9	-	-	85.2
216.5	30.6	84.2	78.9	-	-	83.1
229.7	26.5	82.7	78.9	-	-	80.9
242.8	22.7	81.1	78.9	-	-	78.8
255.9	19.2	79.6	78.9	-	-	76.7
269.0	16.1	78.3	78.9	-	-	74.5
282.2	13.2	76.9	78.9	-	-	72.5
285.4	12.6	76.5	78.9	61.7	-	72.0
295.3	10.8	75.6	78.9	61.7	-	70.5
305.1	8.8	74.6	78.8	61.7	-	69.0
308.4	-	74.3	78.7	61.7	-	68.5
321.5	-	65.3	78.7	61.7	-	66.4
331.4	-	56.7	78.7	61.7	-	65.0
334.6	-	-	78.7	61.7	-	64.6
347.8	-	-	78.7	61.7	-	62.6
360.9	-	-	70.8	61.7	49.6	60.9
367.5	-	-	65.3	61.7	49.6	60.1
374.0	-	-	-	61.7	49.6	59.3
387.1	-	-	-	61.7	49.6	57.6
400.3	-	-	-	61.7	49.6	56.0
403.5	-	-	-	61.7	49.6	55.6
413.4	-	-	-	-	49.6	54.5
426.5	-	-	-	-	49.6	53.1
436.4	-	-	-	-	49.6	50.9
439.6	-	-	-	-	-	49.2
452.8	-	-	-	-	-	42.8
465.9	-	-	-	-	-	35.1
479.0	-	-	-	-	-	30.4
492.1	-	-	-	-	-	23.1
498.7	-	-	-	-	-	19.2

0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

 **363,800 lb +**  **110,200 lb**  **36.1-62.3 ft**  **27.6 ft**  **32.2 ft/s** **360°** **75%**

 **236.2 ft +**  **78.7 ft**

	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
ft	1,000 lb					
42.7	-	518.1*	-	-	-	-
45.9	-	511.5*	-	-	-	-
52.5	-	529.1	-	-	-	-
55.8	286.6	524.7	-	-	-	-
59.1	273.4	520.3	-	-	-	504.9
65.6	249.1	507.1	-	-	-	504.9
72.2	227.1	491.6	-	-	-	504.9
78.7	210.5	478.4	-	-	-	504.9
85.3	195.1	463.0	-	-	-	504.9
91.9	181.9	447.5	-	-	-	498.2
95.1	176.4	440.9	-	-	-	493.8
98.4	170.9	434.3	-	-	-	493.8
105.0	160.9	412.3	-	-	-	481.3
108.3	-	-	502.7	-	-	479.5
111.5	-	-	502.7	-	-	477.7
124.7	-	-	451.9	-	-	446.8
137.8	-	-	405.7	-	-	392.4
144.4	-	-	388.0	-	-	371.1
150.9	-	-	-	-	-	349.8
160.8	-	-	-	319.7	-	320.0
164.0	-	-	-	310.9	-	311.6
177.2	-	-	-	284.4	-	277.8
183.7	-	-	-	273.4	-	264.6
190.3	-	-	-	-	-	251.3
203.4	-	-	-	-	-	227.1
206.7	-	-	-	-	222.7	222.1
216.5	-	-	-	-	210.5	207.2
219.8	-	-	-	-	207.2	202.8
229.7	-	-	-	-	-	189.6
242.8	-	-	-	-	-	173.8
255.9	-	-	-	-	-	159.8
269.0	-	-	-	-	-	142.2
282.2	-	-	-	-	-	123.5
288.7	-	-	-	-	-	115.7

 **236.2 ft +**  **118.1 ft**

	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
ft	1,000 lb					
52.5	-	385.8*	-	-	-	-
59.1	-	379.2*	-	-	-	-
65.6	229.3	390.2	-	-	-	-
72.2	211.6	383.6	-	-	-	374.8
78.7	195.1	377.0	-	-	-	374.8
85.3	180.8	370.4	-	-	-	374.8
91.9	167.6	361.6	-	-	-	374.8
98.4	156.5	352.7	-	-	-	374.8
111.5	137.8	335.1	-	-	-	372.6
124.7	123.5	317.5	374.8	-	-	367.4
134.5	114.4	299.3	371.5	-	-	366.3
137.8	111.3	293.2	370.4	-	-	366.0
141.1	107.8	273.4	366.0	-	-	359.0
150.9	-	-	359.4	-	-	344.7
164.0	-	-	328.5	-	-	317.5
177.2	-	-	299.8	-	-	282.2
183.7	-	-	282.2	266.8	-	269.0
190.3	-	-	-	255.7	-	255.7
203.4	-	-	-	238.1	-	231.5
216.5	-	-	-	220.5	-	211.6
219.8	-	-	-	217.2	-	207.2
229.7	-	-	-	-	-	194.0
236.2	-	-	-	-	185.2	185.2
242.8	-	-	-	-	178.6	177.5
255.9	-	-	-	-	167.6	162.0
269.0	-	-	-	-	-	149.5
282.2	-	-	-	-	-	137.8
295.3	-	-	-	-	-	127.9
308.4	-	-	-	-	-	111.7
321.5	-	-	-	-	-	95.8
324.8	-	-	-	-	-	93.7

 0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb **36.1-62.3 ft** **27.6 ft** **32.2 ft/s** **360°** **75%**

236.2 ft + 157.5 ft

	SWSL-1					SFSL-1
	0 lb					
	0 lb - 716,600 lb					
	85°	87/85°	75°	65°	55°	15°
ft						
59.1	-	291.0*	-	-	-	-
65.6	-	286.6*	-	-	-	-
72.2	-	284.4*	-	-	-	-
75.5	186.3	291.0	-	-	-	-
78.7	179.7	291.0	-	-	-	-
85.3	166.4	288.8	-	-	-	-
88.6	160.4	286.6	-	-	-	282.2
91.9	154.3	284.4	-	-	-	282.2
98.4	144.4	280.0	-	-	-	282.2
111.5	126.8	271.2	-	-	-	282.2
124.7	112.4	262.4	-	-	-	282.2
137.8	100.5	251.3	-	-	-	282.2
141.1	98.1	248.6	275.6	-	-	279.3
150.9	90.6	240.3	275.6	-	-	277.0
164.0	82.0	231.5	273.4	-	-	271.9
170.6	78.2	216.6	272.3	-	-	270.4
177.2	74.3	201.7	271.2	-	-	269.0
180.4	72.3	189.6	267.9	-	-	264.9
190.3	-	-	264.6	-	-	252.8
203.4	-	-	251.3	-	-	234.1
206.7	-	-	243.6	227.1	-	228.7
216.5	-	-	220.5	215.0	-	212.7
219.8	-	-	209.4	211.3	-	208.3
229.7	-	-	-	199.5	-	195.1
242.8	-	-	-	187.4	-	178.9
255.9	-	-	-	175.3	-	164.2
259.2	-	-	-	173.1	-	160.9
262.5	-	-	-	-	156.5	157.6
269.0	-	-	-	-	151.0	151.0
282.2	-	-	-	-	143.3	139.1
295.3	-	-	-	-	135.6	129.0
308.4	-	-	-	-	-	118.7
321.5	-	-	-	-	-	108.5
334.6	-	-	-	-	-	98.5
347.8	-	-	-	-	-	84.9
360.9	-	-	-	-	-	73.9
364.2	-	-	-	-	-	72.1

236.2 ft + 196.9 ft

	SWSL-1					SFSL-1
	0 lb					
	0 lb - 716,600 lb					
	85°	87/85°	75°	65°	55°	15°
ft						
68.9	-	219.4*	-	-	-	-
72.2	-	219.4*	-	-	-	-
78.7	-	217.2*	-	-	-	-
85.3	153.2	220.5	-	-	-	-
91.9	142.2	219.4	-	-	-	-
98.4	132.3	217.2	-	-	-	-
101.7	128.1	216.3	-	-	-	213.8
111.5	115.7	213.8	-	-	-	213.8
124.7	102.7	208.3	-	-	-	213.5
137.8	91.5	202.8	-	-	-	212.7
150.9	81.8	197.3	-	-	-	212.0
157.5	77.7	194.0	201.7	-	-	211.6
164.0	73.6	190.7	201.7	-	-	209.1
177.2	66.4	184.1	201.7	-	-	206.1
190.3	60.2	178.6	201.7	-	-	202.5
203.4	54.7	166.4	201.7	-	-	197.7
210.0	52.4	153.2	200.6	-	-	195.8
216.5	50.0	140.0	200.6	-	-	194.0
226.4	-	-	198.1	174.2	-	189.6
229.7	-	-	197.3	174.2	-	188.5
242.8	-	-	180.8	173.1	-	179.7
255.9	-	-	154.3	170.9	-	166.4
259.2	-	-	147.7	168.1	-	163.1
269.0	-	-	-	159.8	-	153.2
282.2	-	-	-	151.0	-	141.1
292.0	-	-	-	144.4	132.3	132.8
295.3	-	-	-	142.2	130.1	130.1
298.6	-	-	-	141.1	128.1	127.5
308.4	-	-	-	-	122.4	119.8
321.5	-	-	-	-	115.7	110.5
331.4	-	-	-	-	111.3	104.2
334.6	-	-	-	-	-	102.1
347.8	-	-	-	-	-	94.0
360.9	-	-	-	-	-	85.2
374.0	-	-	-	-	-	74.3
387.1	-	-	-	-	-	63.1
400.3	-	-	-	-	-	55.4
403.5	-	-	-	-	-	53.4

0 lb **143,300 lb** **275,600 lb** **363,800 lb** **452,000 lb** **540,200 lb** **628,400 lb** **716,600 lb**

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

236.2 ft + 236.2 ft

ft	SWSL-1					SFSL-1
	0 lb					
	85°	87/85°	75°	65°	55°	15°
78.7	-	166.4*	-	-	-	-
85.3	-	165.3*	-	-	-	-
91.9	-	163.1*	-	-	-	-
95.1	125.7	165.3	-	-	-	-
98.4	121.3	165.3	-	-	-	-
111.5	106.5	163.1	-	-	-	-
114.8	103.2	162.6	-	-	-	159.8
124.7	93.5	160.9	-	-	-	159.8
137.8	82.5	158.7	-	-	-	159.8
150.9	73.4	155.4	-	-	-	158.4
164.0	65.3	152.1	-	-	-	156.5
173.9	60.1	149.6	144.4	-	-	154.9
177.2	58.4	148.8	144.4	-	-	154.3
190.3	52.5	144.4	144.4	-	-	151.4
203.4	47.2	141.1	144.4	-	-	148.6
216.5	42.3	136.7	144.4	-	-	145.5
229.7	38.1	133.4	144.4	-	-	142.6
242.8	34.4	122.4	144.4	-	-	138.5
246.1	33.6	117.7	144.4	-	-	137.8
249.3	32.7	113.1	144.4	122.4	-	137.1
255.9	31.1	103.8	144.4	122.4	-	135.6
269.0	-	-	144.4	122.4	-	131.9
282.2	-	-	133.4	122.4	-	128.6
295.3	-	-	115.7	122.4	-	125.7
308.4	-	-	-	122.4	-	119.3
318.2	-	-	-	122.4	104.9	113.5
321.5	-	-	-	122.4	104.9	111.3
334.6	-	-	-	116.8	104.1	102.3
347.8	-	-	-	-	98.5	94.2
360.9	-	-	-	-	93.5	86.5
370.7	-	-	-	-	89.9	81.1
374.0	-	-	-	-	-	79.4
387.1	-	-	-	-	-	72.2
400.3	-	-	-	-	-	63.8
413.4	-	-	-	-	-	54.2
426.5	-	-	-	-	-	46.2
439.6	-	-	-	-	-	39.0

236.2 ft + 275.6 ft

ft	SWSL-1					SFSL-1
	0 lb					
	85°	87/85°	75°	65°	55°	15°
88.6	-	123.5*	-	-	-	-
91.9	-	122.4*	-	-	-	-
98.4	-	122.4*	-	-	-	-
105.0	103.4	122.4	-	-	-	-
111.5	96.3	121.3	-	-	-	-
124.7	84.0	120.2	-	-	-	-
128.0	81.4	119.9	-	-	-	119.0
137.8	73.6	119.0	-	-	-	119.0
150.9	64.8	116.8	-	-	-	118.3
164.0	57.1	115.7	-	-	-	116.8
177.2	50.5	113.5	-	-	-	114.6
190.3	44.5	111.3	104.9	-	-	113.2
203.4	39.5	109.3	104.9	-	-	111.2
216.5	34.8	107.1	104.9	-	-	108.9
229.7	30.6	104.7	104.9	-	-	106.4
242.8	27.1	102.3	104.9	-	-	103.9
255.9	23.6	100.1	104.9	-	-	101.4
269.0	20.7	97.9	104.9	85.8	-	99.1
282.2	17.9	92.2	104.9	85.8	-	96.3
285.4	17.3	88.6	104.9	85.8	-	95.7
292.0	16.1	81.6	104.9	85.8	-	94.5
295.3	-	-	104.9	85.8	-	93.9
308.4	-	-	104.9	85.8	-	91.6
321.5	-	-	101.6	85.8	-	89.1
334.6	-	-	87.7	85.8	-	86.9
344.5	-	-	-	85.8	71.9	84.9
347.8	-	-	-	85.8	71.9	84.4
360.9	-	-	-	85.8	71.9	82.2
374.0	-	-	-	85.5	71.9	79.8
387.1	-	-	-	-	71.7	73.3
400.3	-	-	-	-	71.7	67.1
410.1	-	-	-	-	71.7	62.6
413.4	-	-	-	-	-	61.1
426.5	-	-	-	-	-	53.7
439.6	-	-	-	-	-	45.9
452.8	-	-	-	-	-	37.7
465.9	-	-	-	-	-	31.4
479.0	-	-	-	-	-	24.5

0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

236.2 ft + 315.0 ft

ft	SWSL-1					SFSL-1
	0 lb					
	0 lb - 716,600 lb					
	85°	87/85°	75°	65°	55°	15°
1,000 lb						
95.1	-	91.5*	-	-	-	-
98.4	-	91.3*	-	-	-	-
111.5	-	90.2*	-	-	-	-
114.8	83.6	89.5	-	-	-	-
124.7	74.7	89.1	-	-	-	-
137.8	65.0	88.4	-	-	-	-
141.1	62.9	88.1	-	-	-	87.5
150.9	56.4	87.1	-	-	-	86.7
164.0	49.2	85.8	-	-	-	85.7
177.2	42.8	84.4	-	-	-	84.7
190.3	37.3	82.9	-	-	-	82.9
203.4	32.2	81.4	-	-	-	81.1
206.7	31.1	81.0	73.6	-	-	80.7
216.5	27.8	79.8	73.6	-	-	79.6
229.7	23.8	78.3	73.6	-	-	77.5
242.8	20.1	76.9	73.6	-	-	75.5
255.9	16.8	75.4	73.6	-	-	73.4
269.0	13.9	73.9	73.6	-	-	71.5
282.2	11.0	72.5	73.6	-	-	69.6
292.0	9.3	71.5	73.6	57.5	-	68.2
295.3	-	71.2	73.6	57.5	-	67.7
308.4	-	70.1	73.6	57.5	-	65.8
321.5	-	66.8	73.6	57.5	-	63.9
324.8	-	64.1	73.6	57.5	-	63.5
331.4	-	58.6	73.6	57.5	-	62.6
334.6	-	-	73.6	57.5	-	62.2
347.8	-	-	73.6	57.5	-	60.2
360.9	-	-	73.6	57.5	-	58.5
370.7	-	-	67.0	57.5	-	57.3
374.0	-	-	-	57.5	46.1	56.9
387.1	-	-	-	57.5	46.1	55.2
400.3	-	-	-	57.5	46.1	53.5
410.1	-	-	-	57.5	45.9	52.4
413.4	-	-	-	-	45.9	52.0
426.5	-	-	-	-	45.9	50.7
439.6	-	-	-	-	45.9	48.0
446.2	-	-	-	-	45.9	46.0
452.8	-	-	-	-	-	43.2
465.9	-	-	-	-	-	36.0
479.0	-	-	-	-	-	28.8
492.1	-	-	-	-	-	23.1
515.1	-	-	-	-	-	12.1

255.9 ft + 78.7 ft

ft	SWSL-1					SFSL-1
	0 lb					
	0 lb - 716,600 lb					
	85°	87/85°	75°	65°	55°	15°
1,000 lb						
42.7	-	432.1*	-	-	-	-
45.9	-	427.7*	-	-	-	-
52.5	-	416.7*	-	-	-	-
55.8	275.6	432.1	-	-	-	-
59.1	262.4	427.7	-	-	-	-
62.3	249.1	423.3	-	-	-	418.9
65.6	238.1	416.7	-	-	-	418.9
72.2	219.4	403.4	-	-	-	418.9
78.7	202.8	390.2	-	-	-	418.9
85.3	188.5	377.0	-	-	-	416.7
91.9	175.3	363.8	-	-	-	414.5
95.1	169.8	358.3	-	-	-	412.3
98.4	164.2	352.7	-	-	-	410.1
105.0	154.3	341.7	-	-	-	407.1
111.5	-	-	405.7	-	-	404.2
124.7	-	-	392.4	-	-	392.4
137.8	-	-	372.6	-	-	383.6
150.9	-	-	346.1	-	-	346.9
164.0	-	-	-	-	-	311.6
170.6	-	-	-	293.2	-	294.7
177.2	-	-	-	280.0	-	277.8
190.3	-	-	-	257.9	-	251.3
203.4	-	-	-	-	-	226.4
216.5	-	-	-	-	-	206.1
219.8	-	-	-	-	201.7	201.7
229.7	-	-	-	-	191.8	188.5
242.8	-	-	-	-	-	172.3
255.9	-	-	-	-	-	157.6
269.0	-	-	-	-	-	145.1
282.2	-	-	-	-	-	130.8
295.3	-	-	-	-	-	114.6
305.1	-	-	-	-	-	102.5

0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb **36.1-62.3 ft** **27.6 ft** **32.2 ft/s** **360°** **75%**

255.9 ft + 118.1 ft

	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
ft	1,000 lb					
52.5	-	324.1*	-	-	-	-
59.1	-	317.5*	-	-	-	-
65.6	220.5	326.3	-	-	-	-
72.2	202.8	319.7	-	-	-	-
75.5	195.1	316.4	-	-	-	313.1
78.7	187.4	313.1	-	-	-	313.1
85.3	173.1	306.4	-	-	-	313.1
91.9	160.9	297.6	-	-	-	313.1
98.4	151.0	291.0	-	-	-	313.1
111.5	133.4	273.4	-	-	-	308.6
124.7	119.0	257.9	-	-	-	305.0
128.0	116.1	254.6	304.2	-	-	304.2
134.5	110.1	248.0	304.2	-	-	302.8
137.8	107.1	244.7	302.0	-	-	302.0
144.4	102.3	238.1	297.6	-	-	296.9
150.9	-	-	293.2	-	-	293.9
164.0	-	-	280.0	-	-	285.1
177.2	-	-	264.6	-	-	277.8
187.0	-	-	253.5	-	-	260.1
190.3	-	-	-	253.5	-	254.3
203.4	-	-	-	233.7	-	231.5
216.5	-	-	-	217.2	-	210.5
229.7	-	-	-	202.8	-	192.9
242.8	-	-	-	-	-	176.4
246.1	-	-	-	-	172.0	172.5
255.9	-	-	-	-	163.1	160.9
269.0	-	-	-	-	154.3	148.4
282.2	-	-	-	-	-	137.1
295.3	-	-	-	-	-	125.7
308.4	-	-	-	-	-	115.4
321.5	-	-	-	-	-	103.3
334.6	-	-	-	-	-	89.5
344.5	-	-	-	-	-	80.2

	0 lb	143,300 lb	275,600 lb	363,800 lb
	452,000 lb	540,200 lb	628,400 lb	716,600 lb

255.9 ft + 157.5 ft

	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
ft	1,000 lb					
62.3	-	244.7*	-	-	-	-
65.6	-	242.5*	-	-	-	-
72.2	-	240.3*	-	-	-	-
75.5	178.6	246.9	-	-	-	-
78.7	172.0	246.9	-	-	-	-
85.3	158.7	244.7	-	-	-	-
88.6	153.2	242.5	-	-	-	235.9
91.9	147.7	240.3	-	-	-	235.9
98.4	137.8	235.9	-	-	-	235.9
111.5	121.3	227.1	-	-	-	235.9
124.7	107.8	217.2	-	-	-	234.4
137.8	96.3	207.2	-	-	-	231.5
147.6	89.2	199.8	229.3	-	-	229.3
150.9	86.9	197.3	229.3	-	-	228.5
164.0	78.7	189.6	227.1	-	-	224.9
170.6	75.2	185.7	223.8	-	-	222.7
177.2	71.7	181.9	220.5	-	-	220.5
180.4	70.1	179.7	219.1	-	-	219.4
190.3	-	-	215.0	-	-	216.1
203.4	-	-	207.2	-	-	208.9
213.3	-	-	200.3	197.3	-	204.5
216.5	-	-	198.4	197.3	-	202.8
226.4	-	-	190.7	195.8	-	193.5
229.7	-	-	-	195.1	-	190.3
242.8	-	-	-	183.0	-	176.7
255.9	-	-	-	170.9	-	162.0
269.0	-	-	-	160.9	-	148.8
275.6	-	-	-	-	142.2	142.2
282.2	-	-	-	-	137.8	137.1
295.3	-	-	-	-	130.1	125.7
305.1	-	-	-	-	125.7	117.9
308.4	-	-	-	-	-	115.4
321.5	-	-	-	-	-	106.0
334.6	-	-	-	-	-	97.7
347.8	-	-	-	-	-	88.8
360.9	-	-	-	-	-	77.5
374.0	-	-	-	-	-	65.3
380.6	-	-	-	-	-	61.5

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

255.9 ft + 196.9 ft

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
68.9	-	189.6*	-	-	-	-
72.2	-	188.5*	-	-	-	-
78.7	-	186.3*	-	-	-	-
85.3	146.6	188.5	-	-	-	-
91.9	136.7	187.4	-	-	-	-
98.4	126.8	185.2	-	-	-	-
101.7	122.9	184.1	-	-	-	181.9
111.5	111.3	180.8	-	-	-	181.9
124.7	98.3	176.4	-	-	-	181.5
137.8	87.5	169.8	-	-	-	180.8
150.9	78.0	164.2	-	-	-	178.6
160.8	72.1	159.3	172.0	-	-	176.9
164.0	70.1	157.6	172.0	-	-	176.4
177.2	63.3	151.0	172.0	-	-	174.2
190.3	57.3	145.5	172.0	-	-	171.2
203.4	52.0	140.0	169.8	-	-	167.6
210.0	49.8	137.8	167.6	-	-	165.3
216.5	47.6	135.6	165.3	-	-	163.1
219.8	46.5	134.5	164.2	-	-	162.0
229.7	-	-	160.9	-	-	158.7
236.2	-	-	158.2	144.4	-	156.5
242.8	-	-	155.4	144.4	-	154.3
255.9	-	-	149.9	144.4	-	149.9
262.5	-	-	146.6	144.4	-	148.1
269.0	-	-	-	144.4	-	146.2
282.2	-	-	-	143.3	-	139.1
295.3	-	-	-	140.0	-	129.0
301.8	-	-	-	135.6	121.3	123.8
305.1	-	-	-	133.4	120.2	121.3
308.4	-	-	-	-	117.9	118.7
321.5	-	-	-	-	111.3	109.1
334.6	-	-	-	-	106.3	100.1
344.5	-	-	-	-	102.1	94.0
347.8	-	-	-	-	-	92.0
360.9	-	-	-	-	-	84.2
374.0	-	-	-	-	-	77.2
387.1	-	-	-	-	-	67.6
400.3	-	-	-	-	-	57.7
413.4	-	-	-	-	-	49.2
419.9	-	-	-	-	-	46.1

255.9 ft + 236.2 ft

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
78.7	-	142.2*	-	-	-	-
85.3	-	141.1*	-	-	-	-
91.9	-	140.0*	-	-	-	-
95.1	120.2	141.1	-	-	-	-
98.4	115.7	141.1	-	-	-	-
111.5	101.4	138.9	-	-	-	-
114.8	98.3	138.3	-	-	-	136.7
124.7	88.8	136.7	-	-	-	136.7
137.8	78.5	133.4	-	-	-	136.7
150.9	69.7	130.1	-	-	-	135.2
164.0	62.2	126.8	-	-	-	133.7
177.2	55.3	122.4	125.7	-	-	132.3
190.3	49.6	119.0	125.7	-	-	130.1
203.4	44.5	114.6	125.7	-	-	127.5
216.5	39.9	110.2	125.7	-	-	124.6
229.7	35.7	107.4	124.6	-	-	122.4
242.8	32.2	103.8	123.5	-	-	119.8
249.3	30.5	102.2	122.4	-	-	118.3
255.9	28.9	100.5	121.3	-	-	116.8
259.2	-	-	120.4	105.6	-	115.2
269.0	-	-	117.9	105.6	-	113.5
282.2	-	-	115.7	105.6	-	110.3
295.3	-	-	111.3	105.6	-	107.6
301.8	-	-	110.2	105.4	-	105.6
308.4	-	-	-	105.4	-	104.0
321.5	-	-	-	105.4	-	100.9
328.1	-	-	-	104.9	88.8	99.3
334.6	-	-	-	104.7	88.2	97.7
344.5	-	-	-	104.5	88.2	93.0
347.8	-	-	-	-	88.2	91.5
360.9	-	-	-	-	88.2	84.7
374.0	-	-	-	-	84.7	77.6
383.9	-	-	-	-	81.6	72.6
387.1	-	-	-	-	-	71.0
400.3	-	-	-	-	-	64.7
413.4	-	-	-	-	-	57.8
426.5	-	-	-	-	-	48.9
439.6	-	-	-	-	-	40.0
452.8	-	-	-	-	-	34.6
456.0	-	-	-	-	-	32.6

0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

255.9 ft + 275.6 ft

	SWSL-1					SFSL-1
	0 lb					
	85°	87/85°	75°	65°	55°	15°
ft	1,000 lb					
88.6	-	107.8*	-	-	-	-
91.9	-	107.4*	-	-	-	-
98.4	-	106.5*	-	-	-	-
105.0	98.1	106.7	-	-	-	-
111.5	91.3	106.0	-	-	-	-
124.7	79.6	104.9	-	-	-	-
128.0	77.1	104.5	-	-	-	103.6
137.8	69.7	103.2	-	-	-	103.2
150.9	61.1	101.2	-	-	-	102.6
164.0	53.8	99.2	-	-	-	101.6
177.2	47.4	97.0	-	-	-	100.1
190.3	41.7	94.4	-	-	-	98.5
196.9	39.2	93.1	91.5	-	-	97.7
203.4	36.8	91.9	91.5	-	-	96.8
216.5	32.4	89.5	91.5	-	-	94.8
229.7	28.4	86.9	91.5	-	-	92.7
242.8	24.9	84.2	91.5	-	-	90.6
255.9	21.6	81.8	91.5	-	-	88.4
269.0	18.7	79.4	91.5	-	-	86.3
282.2	15.9	77.2	91.3	74.5	-	84.1
285.4	15.3	76.6	90.9	74.5	-	83.6
295.3	13.7	74.7	89.7	74.5	-	82.0
308.4	-	-	88.2	74.5	-	79.6
321.5	-	-	86.2	74.5	-	77.5
334.6	-	-	84.2	74.3	-	75.4
337.9	-	-	83.8	74.3	-	74.4
347.8	-	-	-	74.3	-	72.8
357.6	-	-	-	74.3	61.3	71.0
360.9	-	-	-	74.3	61.1	70.2
374.0	-	-	-	74.3	61.1	67.9
380.6	-	-	-	74.3	61.1	66.9
387.1	-	-	-	-	61.1	65.8
400.3	-	-	-	-	60.6	63.5
413.4	-	-	-	-	60.6	58.6
419.9	-	-	-	-	60.6	55.9
426.5	-	-	-	-	-	53.2
439.6	-	-	-	-	-	47.1
452.8	-	-	-	-	-	39.9
465.9	-	-	-	-	-	32.3
479.0	-	-	-	-	-	25.2
492.1	-	-	-	-	-	20.1
495.4	-	-	-	-	-	18.1

255.9 ft + 315.0 ft

	SWSL-1					SFSL-1
	0 lb					
	85°	87/85°	75°	65°	55°	15°
ft	1,000 lb					
98.4	-	79.4*	-	-	-	-
111.5	-	78.3*	-	-	-	-
118.1	75.0	77.8	-	-	-	-
124.7	70.5	77.4	-	-	-	-
137.8	61.1	76.7	-	-	-	-
141.1	59.0	76.4	-	-	-	75.8
150.9	52.9	75.4	-	-	-	75.3
164.0	45.9	74.3	-	-	-	74.6
177.2	39.7	72.8	-	-	-	73.9
190.3	34.4	71.4	-	-	-	72.4
203.4	29.5	69.7	-	-	-	70.9
213.3	26.2	68.5	64.2	-	-	69.8
216.5	25.1	68.1	64.2	-	-	69.4
229.7	21.4	66.4	64.2	-	-	67.8
242.8	17.9	64.8	64.2	-	-	66.1
255.9	14.8	63.1	64.2	-	-	64.4
269.0	11.9	61.3	64.2	-	-	62.6
282.2	9.3	59.5	64.2	-	-	60.8
295.3	-	58.0	64.2	-	-	59.1
301.8	-	57.2	64.2	49.6	-	58.4
308.4	-	56.4	64.2	49.6	-	57.5
321.5	-	54.9	63.7	49.6	-	55.8
324.8	-	54.6	63.6	49.6	-	55.3
334.6	-	53.6	63.3	49.6	-	54.0
347.8	-	-	62.8	49.6	-	52.5
360.9	-	-	61.9	49.6	-	50.7
374.0	-	-	61.3	49.6	-	49.2
377.3	-	-	61.1	49.6	-	48.6
383.9	-	-	-	49.6	38.8	47.8
387.1	-	-	-	49.6	38.8	47.5
400.3	-	-	-	49.6	38.8	45.9
413.4	-	-	-	49.6	38.8	44.3
419.9	-	-	-	49.6	38.8	43.7
426.5	-	-	-	-	38.8	42.4
439.6	-	-	-	-	38.8	40.8
452.8	-	-	-	-	38.8	39.2
459.3	-	-	-	-	38.8	37.3
465.9	-	-	-	-	-	35.3
479.0	-	-	-	-	-	30.1
492.1	-	-	-	-	-	23.4
518.4	-	-	-	-	-	12.3
524.9	-	-	-	-	-	9.7

0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

275.6 ft + 78.7 ft

	SWSL-1					SFSL-1
	0 lb	0 lb - 716,600 lb				
	85°	87/85°	75°	65°	55°	15°
ft						
45.9	-	385.8*	-	-	-	-
52.5	-	374.8*	-	-	-	-
59.1	249.1	385.8	-	-	-	-
62.3	238.1	381.4	-	-	-	374.8
65.6	227.1	377.0	-	-	-	374.8
72.2	209.4	366.0	-	-	-	374.8
78.7	192.9	352.7	-	-	-	372.6
85.3	179.7	341.7	-	-	-	372.6
91.9	167.6	330.7	-	-	-	370.4
98.4	156.5	319.7	-	-	-	366.0
108.3	143.3	304.2	-	-	-	361.6
111.5	-	-	-	-	-	360.1
118.1	-	-	361.6	-	-	357.1
124.7	-	-	354.9	-	-	350.5
137.8	-	-	335.1	-	-	341.7
150.9	-	-	315.3	-	-	331.4
154.2	-	-	308.6	-	-	328.9
164.0	-	-	-	-	-	309.4
177.2	-	-	-	273.4	-	275.6
190.3	-	-	-	251.3	-	249.1
200.1	-	-	-	238.1	-	230.4
203.4	-	-	-	-	-	224.9
216.5	-	-	-	-	-	202.8
229.7	-	-	-	-	-	185.9
232.9	-	-	-	-	181.9	181.7
242.8	-	-	-	-	174.2	170.1
255.9	-	-	-	-	-	155.4
269.0	-	-	-	-	-	142.2
282.2	-	-	-	-	-	130.1
295.3	-	-	-	-	-	119.0
308.4	-	-	-	-	-	104.2
321.5	-	-	-	-	-	88.6

	0 lb	143,300 lb	275,600 lb	363,800 lb
	452,000 lb	540,200 lb	628,400 lb	716,600 lb

275.6 ft + 118.1 ft

	SWSL-1					SFSL-1
	0 lb	0 lb - 716,600 lb				
	85°	87/85°	75°	65°	55°	15°
ft						
52.5	-	295.4*	-	-	-	-
59.1	-	288.8*	-	-	-	-
65.6	-	282.2*	-	-	-	-
68.9	200.6	293.2	-	-	-	-
72.2	192.9	291.0	-	-	-	-
75.5	185.7	287.7	-	-	-	282.2
78.7	178.6	284.4	-	-	-	282.2
85.3	165.3	277.8	-	-	-	282.2
91.9	154.3	271.2	-	-	-	282.2
98.4	143.3	264.6	-	-	-	282.2
111.5	126.8	249.1	-	-	-	277.8
124.7	113.5	235.9	-	-	-	273.4
134.5	105.1	226.0	271.2	-	-	270.1
137.8	102.3	222.7	271.2	-	-	269.0
144.4	97.4	218.3	267.5	-	-	266.0
150.9	-	-	264.6	-	-	263.1
164.0	-	-	253.5	-	-	256.5
177.2	-	-	240.3	-	-	249.1
190.3	-	-	224.9	-	-	240.3
193.6	-	-	222.7	-	-	238.1
200.1	-	-	-	229.3	-	231.5
203.4	-	-	-	227.1	-	227.1
216.5	-	-	-	211.6	-	207.2
229.7	-	-	-	197.3	-	188.9
236.2	-	-	-	190.7	-	179.7
242.8	-	-	-	-	-	172.3
255.9	-	-	-	-	-	157.6
259.2	-	-	-	-	154.3	154.5
269.0	-	-	-	-	147.7	145.1
278.9	-	-	-	-	141.1	136.0
282.2	-	-	-	-	-	133.0
295.3	-	-	-	-	-	121.3
308.4	-	-	-	-	-	111.7
321.5	-	-	-	-	-	102.2
334.6	-	-	-	-	-	92.8
347.8	-	-	-	-	-	79.5
360.9	-	-	-	-	-	67.2

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

275.6 ft + 157.5 ft

	SWSL-1					SFSL-1
	0 lb					
	0 lb - 716,600 lb					
	85°	87/85°	75°	65°	55°	15°
ft						
62.3	-	224.9*	-	-	-	-
65.6	-	222.7*	-	-	-	-
72.2	-	219.4*	-	-	-	-
78.7	163.1	222.7	-	-	-	-
85.3	151.0	220.5	-	-	-	-
91.9	141.1	217.2	-	-	-	216.1
98.4	131.2	213.8	-	-	-	216.1
111.5	115.7	205.0	-	-	-	215.3
124.7	102.5	196.2	-	-	-	213.5
137.8	91.7	187.4	-	-	-	210.5
150.9	82.5	178.6	206.1	-	-	207.6
164.0	74.5	170.9	203.9	-	-	203.9
173.9	69.6	165.1	200.6	-	-	200.6
177.2	67.9	163.1	199.5	-	-	199.5
183.7	65.0	159.8	196.2	-	-	197.3
190.3	-	-	192.9	-	-	195.1
203.4	-	-	185.2	-	-	189.6
216.5	-	-	178.6	-	-	184.1
223.1	-	-	174.2	176.4	-	180.0
229.7	-	-	169.8	175.3	-	177.1
242.8	-	-	-	174.2	-	169.4
255.9	-	-	-	167.6	-	159.8
269.0	-	-	-	157.6	-	146.6
275.6	-	-	-	153.2	-	140.0
282.2	-	-	-	-	-	134.9
285.4	-	-	-	-	130.1	132.1
295.3	-	-	-	-	124.6	123.5
308.4	-	-	-	-	117.9	113.3
318.2	-	-	-	-	113.5	106.0
321.5	-	-	-	-	-	103.7
334.6	-	-	-	-	-	94.6
347.8	-	-	-	-	-	86.6
360.9	-	-	-	-	-	78.0
374.0	-	-	-	-	-	68.8
387.1	-	-	-	-	-	57.5
397.0	-	-	-	-	-	50.9

275.6 ft + 196.9 ft

	SWSL-1					SFSL-1
	0 lb					
	0 lb - 716,600 lb					
	85°	87/85°	75°	65°	55°	15°
ft						
72.2	-	173.1*	-	-	-	-
78.7	-	170.9*	-	-	-	-
85.3	-	168.7*	-	-	-	-
88.6	133.4	172.0	-	-	-	-
91.9	129.0	170.9	-	-	-	-
98.4	120.2	169.8	-	-	-	-
105.0	112.9	167.6	-	-	-	166.4
111.5	105.6	165.3	-	-	-	165.9
124.7	93.0	159.8	-	-	-	165.0
137.8	82.7	154.3	-	-	-	164.2
150.9	73.9	148.8	-	-	-	162.0
164.0	66.4	143.3	-	-	-	159.8
167.3	64.7	141.6	153.2	-	-	159.3
177.2	59.7	136.7	153.2	-	-	157.6
190.3	54.0	131.2	152.1	-	-	154.7
203.4	48.9	126.8	149.9	-	-	151.2
210.0	46.7	124.6	147.7	-	-	149.5
216.5	44.5	122.4	145.5	-	-	147.7
219.8	43.4	121.3	144.4	-	-	146.8
229.7	-	-	141.1	-	-	144.0
242.8	-	-	135.6	130.1	-	139.3
255.9	-	-	130.1	130.1	-	135.6
269.0	-	-	124.6	130.1	-	130.8
282.2	-	-	-	126.8	-	126.8
295.3	-	-	-	123.5	-	122.4
308.4	-	-	-	119.0	-	114.0
311.7	-	-	-	117.4	107.4	111.9
315.0	-	-	-	115.7	107.4	109.8
321.5	-	-	-	-	105.6	105.2
334.6	-	-	-	-	99.9	96.1
347.8	-	-	-	-	94.6	88.0
354.3	-	-	-	-	92.2	84.0
360.9	-	-	-	-	-	80.4
374.0	-	-	-	-	-	73.2
387.1	-	-	-	-	-	66.7
400.3	-	-	-	-	-	58.8
413.4	-	-	-	-	-	49.4
426.5	-	-	-	-	-	40.0
436.4	-	-	-	-	-	36.4

0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

275.6 ft + 236.2 ft

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
78.7	-	131.2*	-	-	-	-
85.3	-	130.1*	-	-	-	-
91.9	-	129.0*	-	-	-	-
98.4	109.8	130.1	-	-	-	-
111.5	95.5	127.9	-	-	-	-
118.1	89.6	126.2	-	-	-	125.7
124.7	83.8	124.6	-	-	-	125.3
137.8	73.9	122.4	-	-	-	124.6
150.9	65.5	119.0	-	-	-	123.1
164.0	58.2	114.6	-	-	-	121.6
177.2	51.8	111.3	-	-	-	120.2
187.7	49.1	109.6	114.6	-	-	119.0
190.3	46.3	107.8	114.6	-	-	117.9
203.4	41.2	103.8	114.6	-	-	116.2
216.5	36.8	100.1	113.5	-	-	113.5
229.7	33.1	96.6	113.5	-	-	111.2
242.8	29.5	93.0	111.3	-	-	108.5
249.3	28.0	91.5	110.2	-	-	107.1
255.9	26.5	89.9	109.1	-	-	105.6
259.2	25.6	89.1	108.4	-	-	104.9
265.7	-	-	106.8	95.0	-	103.5
269.0	-	-	106.0	95.0	-	102.7
282.2	-	-	103.0	95.0	-	99.9
295.3	-	-	99.2	95.0	-	97.0
305.1	-	-	96.3	95.0	-	94.6
308.4	-	-	-	95.0	-	93.8
321.5	-	-	-	94.6	-	90.1
334.6	-	-	-	93.3	-	86.9
341.2	-	-	-	91.9	78.5	85.1
347.8	-	-	-	90.6	77.8	83.3
351.1	-	-	-	89.7	77.8	82.6
360.9	-	-	-	-	77.8	79.1
374.0	-	-	-	-	77.8	73.6
387.1	-	-	-	-	75.0	67.1
393.7	-	-	-	-	73.0	63.9
400.3	-	-	-	-	-	60.9
413.4	-	-	-	-	-	54.9
426.5	-	-	-	-	-	48.1
439.6	-	-	-	-	-	40.7
452.8	-	-	-	-	-	32.6
465.9	-	-	-	-	-	26.2
475.7	-	-	-	-	-	21.6

275.6 ft + 275.6 ft

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
88.6	-	99.2*	-	-	-	-
91.9	-	98.8*	-	-	-	-
98.4	-	97.9*	-	-	-	-
108.3	88.8	97.9	-	-	-	-
111.5	85.5	97.4	-	-	-	-
124.7	74.5	96.1	-	-	-	-
131.2	69.8	95.2	-	-	-	94.6
137.8	65.0	94.4	-	-	-	94.1
150.9	56.9	92.6	-	-	-	93.5
164.0	49.8	90.4	-	-	-	92.6
177.2	43.9	88.2	-	-	-	91.3
190.3	38.4	85.5	-	-	-	89.8
200.1	34.9	83.7	83.3	-	-	88.7
203.4	33.7	83.1	83.3	-	-	88.3
216.5	29.3	80.7	83.3	-	-	86.6
229.7	25.6	78.0	83.3	-	-	84.7
242.8	22.3	75.4	83.3	-	-	82.7
255.9	19.0	73.0	83.1	-	-	80.7
269.0	16.3	70.5	82.2	-	-	78.6
282.2	13.7	68.3	81.4	-	-	76.5
288.7	12.6	67.2	80.6	66.8	-	75.4
295.3	11.5	66.1	79.8	66.8	-	74.3
298.6	10.8	65.5	79.4	66.8	-	73.8
308.4	-	-	78.0	66.8	-	72.2
321.5	-	-	76.1	66.8	-	70.2
334.6	-	-	73.9	66.8	-	68.1
344.5	-	-	72.1	66.8	-	66.1
347.8	-	-	-	66.8	-	65.5
360.9	-	-	-	66.8	-	63.2
367.5	-	-	-	66.8	53.6	62.0
374.0	-	-	-	66.8	53.6	60.8
387.1	-	-	-	66.1	53.6	57.9
390.4	-	-	-	66.1	53.6	57.3
400.3	-	-	-	-	53.6	55.5
413.4	-	-	-	-	53.1	53.1
426.5	-	-	-	-	53.1	48.9
433.1	-	-	-	-	53.1	46.7
439.6	-	-	-	-	-	44.2
452.8	-	-	-	-	-	39.0
465.9	-	-	-	-	-	32.0
479.0	-	-	-	-	-	24.9
492.1	-	-	-	-	-	18.1
511.8	-	-	-	-	-	10.1

0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

 **363,800 lb +  110,200 lb**  **36.1-62.3 ft**  **27.6 ft**  **32.2 ft/s** **360°** **75%**

 **275.6 ft +  315.0 ft**

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
98.4	-	72.8*	-	-	-	-
111.5	-	71.7*	-	-	-	-
118.1	68.8	71.4	-	-	-	-
124.7	66.1	71.0	-	-	-	-
137.8	57.1	70.1	-	-	-	-
144.4	53.1	69.4	-	-	-	69.0
150.9	49.2	68.8	-	-	-	68.7
164.0	42.5	67.7	-	-	-	68.0
177.2	36.6	66.1	-	-	-	67.2
190.3	31.3	64.6	-	-	-	66.0
203.4	26.7	63.1	-	-	-	64.6
216.5	22.5	61.3	58.0	-	-	63.3
229.7	18.7	59.7	58.0	-	-	61.8
242.8	15.4	58.0	58.0	-	-	60.3
255.9	12.3	56.2	58.0	-	-	58.6
269.0	9.7	54.5	58.0	-	-	57.1
272.3	9.0	54.0	58.0	-	-	56.7
282.2	-	52.7	58.0	-	-	55.4
295.3	-	50.9	57.8	-	-	53.8
308.4	-	49.4	57.8	-	-	52.2
311.7	-	49.0	57.8	44.1	-	51.8
321.5	-	47.8	57.1	44.1	-	50.6
324.8	-	47.5	56.8	44.1	-	50.3
334.6	-	46.3	56.0	44.1	-	48.9
347.8	-	-	54.9	44.1	-	47.4
360.9	-	-	53.8	44.1	-	45.6
374.0	-	-	52.5	44.1	-	44.1
383.9	-	-	51.6	44.1	-	42.9
387.1	-	-	-	44.1	-	42.5
397.0	-	-	-	44.1	33.5	41.2
400.3	-	-	-	44.1	33.5	40.8
413.4	-	-	-	44.1	33.5	38.8
426.5	-	-	-	44.1	33.5	37.3
439.6	-	-	-	-	33.3	35.1
452.8	-	-	-	-	33.3	33.3
465.9	-	-	-	-	33.3	31.4
469.2	-	-	-	-	33.3	30.9
479.0	-	-	-	-	-	29.1
492.1	-	-	-	-	-	24.5
518.4	-	-	-	-	-	11.9
528.2	-	-	-	-	-	9.0

 **295.3 ft +  78.7 ft**

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
45.9	-	348.3*	-	-	-	-
52.5	-	339.5*	-	-	-	-
59.1	-	348.3	-	-	-	-
62.3	224.9	343.9	-	-	-	-
65.6	216.1	339.5	-	-	-	337.3
72.2	199.5	330.7	-	-	-	335.1
78.7	184.1	319.7	-	-	-	335.1
85.3	170.9	310.9	-	-	-	332.9
91.9	159.8	299.8	-	-	-	330.7
98.4	149.9	288.8	-	-	-	328.5
108.3	136.7	277.8	-	-	-	324.1
111.5	-	-	-	-	-	322.6
124.7	-	-	317.5	-	-	315.3
137.8	-	-	302.0	-	-	306.4
150.9	-	-	284.4	-	-	297.6
160.8	-	-	269.0	-	-	287.7
164.0	-	-	-	-	-	284.4
177.2	-	-	-	-	-	271.2
187.0	-	-	-	251.3	-	251.3
190.3	-	-	-	244.7	-	244.7
203.4	-	-	-	227.1	-	220.8
206.7	-	-	-	222.7	-	215.5
216.5	-	-	-	-	-	199.5
229.7	-	-	-	-	-	181.9
242.8	-	-	-	-	166.4	165.7
252.6	-	-	-	-	158.7	154.7
255.9	-	-	-	-	-	151.0
269.0	-	-	-	-	-	138.5
282.2	-	-	-	-	-	126.4
295.3	-	-	-	-	-	114.6
308.4	-	-	-	-	-	105.2
321.5	-	-	-	-	-	93.3
334.6	-	-	-	-	-	78.7
337.9	-	-	-	-	-	75.2

 **0 lb** **143,300 lb** **275,600 lb** **363,800 lb** **452,000 lb** **540,200 lb** **628,400 lb** **716,600 lb**

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1

SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

295.3 ft + 118.1 ft

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
55.8	-	264.6*	-	-	-	-
59.1	-	262.4*	-	-	-	-
65.6	-	255.7*	-	-	-	-
68.9	190.7	266.8	-	-	-	-
72.2	183.0	262.4	-	-	-	-
78.7	169.8	257.9	-	-	-	255.7
85.3	157.6	251.3	-	-	-	253.5
91.9	146.6	246.9	-	-	-	253.5
98.4	136.7	240.3	-	-	-	250.6
111.5	121.3	227.1	-	-	-	246.9
124.7	108.2	213.8	-	-	-	242.5
137.8	97.4	202.8	-	-	-	241.0
141.1	95.2	201.0	240.3	-	-	238.1
147.6	90.8	197.3	235.9	-	-	236.6
150.9	-	-	233.7	-	-	230.8
164.0	-	-	224.9	-	-	224.9
177.2	-	-	215.0	-	-	216.8
190.3	-	-	202.8	-	-	212.7
196.9	-	-	196.2	-	-	208.7
203.4	-	-	-	-	-	206.7
206.7	-	-	-	202.8	-	200.6
216.5	-	-	-	199.5	-	184.5
229.7	-	-	-	189.6	-	169.0
242.8	-	-	-	178.6	-	165.3
246.1	-	-	-	176.4	-	154.3
255.9	-	-	-	-	-	141.1
269.0	-	-	-	-	141.1	129.7
282.2	-	-	-	-	133.4	120.9
292.0	-	-	-	-	127.9	117.9
295.3	-	-	-	-	-	108.0
308.4	-	-	-	-	-	98.5
321.5	-	-	-	-	-	89.5
334.6	-	-	-	-	-	80.4
347.8	-	-	-	-	-	69.7
360.9	-	-	-	-	-	57.5
374.0	-	-	-	-	-	55.3
377.3	-	-	-	-	-	

0 lb	143,300 lb	275,600 lb	363,800 lb
452,000 lb	540,200 lb	628,400 lb	716,600 lb

295.3 ft + 157.5 ft

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
62.3	-	205.0*	-	-	-	-
65.6	-	203.9*	-	-	-	-
72.2	-	200.6*	-	-	-	-
78.7	154.3	203.9	-	-	-	-
85.3	143.3	200.6	-	-	-	-
91.9	133.4	198.4	-	-	-	195.1
98.4	124.6	194.0	-	-	-	195.1
111.5	109.8	186.3	-	-	-	194.4
124.7	97.2	178.6	-	-	-	192.5
137.8	86.9	169.8	-	-	-	189.6
150.9	78.0	162.0	-	-	-	186.7
154.2	76.2	160.1	184.1	-	-	185.9
164.0	70.8	154.3	183.0	-	-	183.0
173.9	65.8	149.4	179.7	-	-	179.7
177.2	64.2	147.7	178.6	-	-	178.6
183.7	61.5	145.5	175.8	-	-	176.4
190.3	-	-	173.1	-	-	174.2
203.4	-	-	166.4	-	-	169.4
216.5	-	-	159.8	-	-	164.2
229.7	-	-	152.1	151.0	-	159.1
236.2	-	-	148.8	149.9	-	156.5
242.8	-	-	-	148.8	-	152.5
255.9	-	-	-	144.4	-	146.6
269.0	-	-	-	137.8	-	141.3
282.2	-	-	-	131.2	-	131.9
285.4	-	-	-	129.0	-	129.0
295.3	-	-	-	-	-	120.2
298.6	-	-	-	-	116.8	117.7
308.4	-	-	-	-	112.4	110.2
321.5	-	-	-	-	106.5	100.7
328.1	-	-	-	-	103.6	96.2
334.6	-	-	-	-	-	91.7
347.8	-	-	-	-	-	83.6
360.9	-	-	-	-	-	76.0
374.0	-	-	-	-	-	68.8
387.1	-	-	-	-	-	60.0
400.3	-	-	-	-	-	50.0
413.4	-	-	-	-	-	40.8
416.7	-	-	-	-	-	39.5

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

 **363,800 lb +  110,200 lb**  **36.1-62.3 ft**  **27.6 ft**  **32.2 ft/s** **360°** **75%**

 **295.3 ft +  196.9 ft**

ft	SWSL-1					SFSL-1
	0 lb					
	85°	87/85°	75°	65°	55°	15°
	1,000 lb					
72.2	-	156.5*	-	-	-	-
78.7	-	154.3*	-	-	-	-
85.3	-	152.1*	-	-	-	-
88.6	126.8	155.4	-	-	-	-
91.9	122.4	154.3	-	-	-	-
98.4	113.5	152.1	-	-	-	-
105.0	106.7	149.9	-	-	-	148.8
111.5	99.9	147.7	-	-	-	148.3
124.7	88.0	143.3	-	-	-	147.3
137.8	78.0	137.8	-	-	-	146.6
150.9	69.7	132.3	-	-	-	144.4
164.0	62.4	127.9	-	-	-	142.2
173.9	57.6	123.7	137.8	-	-	140.5
177.2	56.0	122.4	137.8	-	-	140.0
190.3	50.5	116.8	136.7	-	-	136.5
203.4	45.6	112.4	133.4	-	-	133.0
213.3	42.5	109.1	131.2	-	-	130.8
216.5	41.4	108.0	130.1	-	-	130.1
223.1	39.5	106.3	127.9	-	-	127.9
229.7	-	-	125.7	-	-	125.7
242.8	-	-	121.3	-	-	121.6
252.6	-	-	117.9	114.6	-	118.9
255.9	-	-	116.8	114.6	-	117.9
269.0	-	-	111.3	114.6	-	113.5
272.3	-	-	109.8	113.8	-	112.4
282.2	-	-	-	111.3	-	109.6
295.3	-	-	-	108.7	-	106.3
308.4	-	-	-	104.1	-	101.3
321.5	-	-	-	98.8	-	96.6
324.8	-	-	-	-	91.7	95.5
334.6	-	-	-	-	91.5	91.9
347.8	-	-	-	-	89.1	85.1
360.9	-	-	-	-	84.7	77.5
367.5	-	-	-	-	82.5	73.9
374.0	-	-	-	-	-	70.3
387.1	-	-	-	-	-	63.6
400.3	-	-	-	-	-	57.1
413.4	-	-	-	-	-	50.5
426.5	-	-	-	-	-	41.9
439.6	-	-	-	-	-	33.0
452.8	-	-	-	-	-	27.3

 **295.3 ft +  236.2 ft**

ft	SWSL-1					SFSL-1
	0 lb					
	85°	87/85°	75°	65°	55°	15°
	1,000 lb					
82.0	-	119.0*	-	-	-	-
85.3	-	119.0*	-	-	-	-
91.9	-	117.9*	-	-	-	-
98.4	103.4	117.9	-	-	-	-
111.5	89.9	116.8	-	-	-	-
118.1	84.3	115.2	-	-	-	113.5
124.7	78.7	113.5	-	-	-	113.5
137.8	69.2	110.2	-	-	-	113.5
150.9	61.3	107.8	-	-	-	112.1
164.0	54.2	104.3	-	-	-	110.5
177.2	48.1	100.8	-	-	-	108.9
190.3	43.0	97.0	103.4	-	-	107.1
203.4	38.1	93.3	103.4	-	-	104.9
216.5	34.0	89.7	103.2	-	-	102.5
229.7	30.2	86.4	101.6	-	-	100.0
242.8	26.9	83.1	99.2	-	-	97.4
249.3	25.4	81.7	98.1	-	-	96.0
255.9	23.8	80.2	97.0	-	-	94.6
259.2	23.1	79.6	96.3	-	-	93.9
269.0	-	-	94.1	-	-	91.8
275.6	-	-	92.5	84.4	-	90.4
282.2	-	-	90.8	84.4	-	88.9
295.3	-	-	87.5	84.4	-	86.0
308.4	-	-	84.0	84.4	-	83.0
311.7	-	-	82.9	84.0	-	82.3
321.5	-	-	-	82.9	-	79.9
334.6	-	-	-	80.9	-	76.9
347.8	-	-	-	78.0	-	72.9
354.3	-	-	-	76.2	67.0	71.2
360.9	-	-	-	74.3	67.0	69.4
374.0	-	-	-	-	66.4	65.9
387.1	-	-	-	-	65.5	62.4
400.3	-	-	-	-	62.8	57.8
403.5	-	-	-	-	61.9	56.4
413.4	-	-	-	-	-	52.2
426.5	-	-	-	-	-	46.7
439.6	-	-	-	-	-	40.6
452.8	-	-	-	-	-	33.7
465.9	-	-	-	-	-	26.1
479.0	-	-	-	-	-	19.4
492.1	-	-	-	-	-	13.9

 **0 lb** **143,300 lb** **275,600 lb** **363,800 lb** **452,000 lb** **540,200 lb** **628,400 lb** **716,600 lb**

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

295.3 ft + 275.6 ft

ft	SWSL-1					SFSL-1
	0 lb					
	85°	87/85°	75°	65°	55°	15°
88.6	-	90.8*	-	-	-	-
91.9	-	90.4*	-	-	-	-
98.4	-	89.5*	-	-	-	-
108.3	82.9	89.3	-	-	-	-
111.5	80.0	89.1	-	-	-	-
124.7	69.2	87.7	-	-	-	-
131.2	64.8	86.9	-	-	-	85.8
137.8	60.4	86.0	-	-	-	85.5
150.9	52.7	84.0	-	-	-	84.8
164.0	46.1	81.8	-	-	-	83.9
177.2	40.1	79.6	-	-	-	82.9
190.3	35.1	77.2	-	-	-	81.4
203.4	30.6	74.5	-	-	-	79.9
206.7	29.6	73.9	75.2	-	-	79.5
216.5	26.5	72.1	75.2	-	-	78.3
229.7	22.9	69.7	75.2	-	-	76.4
242.8	19.4	67.0	75.2	-	-	74.4
255.9	16.5	64.6	74.7	-	-	72.5
269.0	13.9	62.4	73.4	-	-	70.5
282.2	11.2	60.2	72.1	-	-	68.3
288.7	10.1	59.2	71.2	-	-	67.2
295.3	9.0	58.2	70.3	-	-	66.1
298.6	-	57.5	69.8	59.1	-	65.6
308.4	-	-	68.3	59.1	-	64.1
321.5	-	-	66.4	59.1	-	61.9
334.6	-	-	64.2	59.1	-	59.7
347.8	-	-	61.7	59.1	-	57.6
351.1	-	-	61.1	59.1	-	57.1
360.9	-	-	-	59.1	-	55.1
374.0	-	-	-	57.8	-	52.5
380.6	-	-	-	57.3	45.6	51.2
387.1	-	-	-	56.4	45.6	50.0
397.0	-	-	-	54.7	45.6	47.8
400.3	-	-	-	-	45.6	47.0
413.4	-	-	-	-	45.6	44.3
426.5	-	-	-	-	45.0	41.7
439.6	-	-	-	-	44.3	38.9
442.9	-	-	-	-	43.7	38.1
452.8	-	-	-	-	-	35.9
465.9	-	-	-	-	-	30.8
479.0	-	-	-	-	-	24.3
492.1	-	-	-	-	-	17.6
511.8	-	-	-	-	-	9.0

295.3 ft + 315.0 ft

ft	SWSL-1					SFSL-1
	0 lb					
	85°	87/85°	75°	65°	55°	15°
98.4	-	66.1*	-	-	-	-
111.5	-	65.0*	-	-	-	-
121.4	61.7	64.6	-	-	-	-
124.7	60.4	64.4	-	-	-	-
137.8	51.8	63.5	-	-	-	-
147.6	46.4	62.5	-	-	-	62.2
150.9	44.5	62.2	-	-	-	61.9
164.0	38.1	60.8	-	-	-	61.2
177.2	32.6	59.5	-	-	-	60.6
190.3	27.6	58.0	-	-	-	59.5
203.4	23.1	56.2	-	-	-	58.2
216.5	19.2	54.7	-	-	-	56.9
223.1	17.4	53.8	51.8	-	-	56.2
229.7	15.7	52.9	51.8	-	-	55.6
242.8	12.6	51.1	51.8	-	-	54.2
255.9	9.7	49.4	51.8	-	-	52.7
259.2	9.0	48.9	51.8	-	-	52.3
269.0	-	47.6	51.8	-	-	51.1
282.2	-	45.9	51.6	-	-	49.5
295.3	-	44.1	50.9	-	-	47.8
308.4	-	42.5	50.3	-	-	46.3
318.2	-	41.4	49.8	38.1	-	45.0
321.5	-	41.0	49.6	38.1	-	44.6
324.8	-	40.6	49.3	38.1	-	44.3
334.6	-	39.5	48.5	38.1	-	43.0
337.9	-	39.2	48.2	38.1	-	42.6
347.8	-	-	47.2	38.1	-	41.4
360.9	-	-	45.9	38.1	-	39.8
374.0	-	-	44.3	38.1	-	38.1
387.1	-	-	43.0	38.1	-	36.4
400.3	-	-	-	38.1	-	34.4
410.1	-	-	-	38.1	27.6	33.1
413.4	-	-	-	38.1	27.6	32.6
426.5	-	-	-	37.5	27.3	30.7
436.4	-	-	-	36.8	27.3	29.3
439.6	-	-	-	-	27.3	28.7
452.8	-	-	-	-	27.3	26.2
465.9	-	-	-	-	27.3	24.4
479.0	-	-	-	-	27.3	22.2
482.3	-	-	-	-	26.9	21.6
492.1	-	-	-	-	-	19.8
518.4	-	-	-	-	-	9.3



0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

 **363,800 lb +  110,200 lb**  **36.1-62.3 ft**  **27.6 ft**  **32.2 ft/s** **360°** **75%**

 **315.0 ft +  78.7 ft**

	SWSL-1					SFSL-1
	0 lb		0 lb - 716,600 lb			
	85°	87/85°	75°	65°	55°	15°
ft			1,000 lb			
45.9	-	313.1*	-	-	-	-
52.5	-	306.4*	-	-	-	-
59.1	-	308.6	-	-	-	-
62.3	213.8	308.6	-	-	-	-
65.6	205.0	304.2	-	-	-	299.8
72.2	188.5	297.6	-	-	-	299.8
78.7	175.3	288.8	-	-	-	297.6
85.3	163.1	280.0	-	-	-	295.4
91.9	152.1	271.2	-	-	-	295.4
98.4	142.2	262.4	-	-	-	291.0
111.5	126.8	249.1	-	-	-	285.1
124.7	-	-	-	-	-	278.5
128.0	-	-	280.0	-	-	276.7
137.8	-	-	271.2	-	-	271.2
150.9	-	-	255.7	-	-	262.4
164.0	-	-	238.1	-	-	252.8
177.2	-	-	-	-	-	242.5
190.3	-	-	-	-	-	231.5
193.6	-	-	-	227.1	-	229.3
203.4	-	-	-	218.3	-	217.2
216.5	-	-	-	202.8	-	197.3
229.7	-	-	-	-	-	179.7
242.8	-	-	-	-	-	163.4
252.6	-	-	-	-	153.2	152.1
255.9	-	-	-	-	149.9	148.8
262.5	-	-	-	-	145.5	142.2
269.0	-	-	-	-	-	135.6
282.2	-	-	-	-	-	123.1
295.3	-	-	-	-	-	111.3
308.4	-	-	-	-	-	101.8
321.5	-	-	-	-	-	92.2
334.6	-	-	-	-	-	82.7
347.8	-	-	-	-	-	69.3
357.6	-	-	-	-	-	59.3

 **315.0 ft +  118.1 ft**

	SWSL-1					SFSL-1
	0 lb		0 lb - 716,600 lb			
	85°	87/85°	75°	65°	55°	15°
ft			1,000 lb			
55.8	-	238.1*	-	-	-	-
59.1	-	235.9*	-	-	-	-
65.6	-	231.5*	-	-	-	-
72.2	173.1	235.9	-	-	-	-
78.7	159.8	231.5	-	-	-	-
82.0	154.3	229.3	-	-	-	227.1
85.3	148.8	227.1	-	-	-	227.1
91.9	138.9	220.5	-	-	-	227.1
98.4	130.1	216.1	-	-	-	224.9
111.5	114.6	203.9	-	-	-	221.9
124.7	102.7	192.9	-	-	-	218.6
137.8	92.4	183.0	-	-	-	215.0
144.4	88.0	179.3	212.7	-	-	212.0
147.6	85.8	177.5	211.6	-	-	210.5
150.9	-	-	210.5	-	-	209.1
164.0	-	-	201.7	-	-	203.2
177.2	-	-	191.8	-	-	197.3
190.3	-	-	181.9	-	-	190.0
203.4	-	-	170.9	-	-	182.6
216.5	-	-	-	175.3	-	175.3
229.7	-	-	-	167.6	-	166.8
242.8	-	-	-	158.7	-	159.5
255.9	-	-	-	147.7	-	152.1
269.0	-	-	-	-	-	138.9
282.2	-	-	-	-	126.8	126.4
295.3	-	-	-	-	119.0	114.6
301.8	-	-	-	-	115.7	109.7
308.4	-	-	-	-	-	104.8
321.5	-	-	-	-	-	95.2
334.6	-	-	-	-	-	86.4
347.8	-	-	-	-	-	78.5
360.9	-	-	-	-	-	70.5
374.0	-	-	-	-	-	60.2
387.1	-	-	-	-	-	49.2
393.7	-	-	-	-	-	44.3

 0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1

SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

315.0 ft + 157.5 ft

	SWSL-1					SFSL-1
	0 lb	0 lb - 716,600 lb				
	85°	87/85°	75°	65°	55°	15°
ft			1,000 lb			
65.6	-	185.2*	-	-	-	-
72.2	-	181.9*	-	-	-	-
78.7	-	178.6*	-	-	-	-
82.0	141.1	183.0	-	-	-	-
85.3	135.6	181.9	-	-	-	-
91.9	125.7	179.7	-	-	-	-
95.1	121.8	178.0	-	-	-	176.4
98.4	117.9	176.4	-	-	-	175.3
111.5	103.6	168.7	-	-	-	174.5
124.7	91.9	160.9	-	-	-	172.7
137.8	82.0	153.2	-	-	-	169.8
150.9	73.6	146.6	-	-	-	166.8
160.8	68.2	141.6	164.2	-	-	164.4
164.0	66.4	140.0	163.1	-	-	163.5
173.9	61.9	135.0	160.9	-	-	160.8
177.2	60.4	133.4	159.8	-	-	159.8
187.0	56.2	130.1	155.7	-	-	156.5
190.3	-	-	154.3	-	-	155.4
203.4	-	-	148.8	-	-	150.6
216.5	-	-	142.2	-	-	145.5
229.7	-	-	135.6	-	-	140.4
239.5	-	-	130.1	130.1	-	136.3
242.8	-	-	-	130.1	-	134.8
255.9	-	-	-	125.7	-	129.0
269.0	-	-	-	120.2	-	123.1
282.2	-	-	-	113.5	-	117.2
292.0	-	-	-	108.9	-	112.8
295.3	-	-	-	-	-	111.3
308.4	-	-	-	-	100.5	104.6
321.5	-	-	-	-	96.6	96.5
334.6	-	-	-	-	91.3	87.5
341.2	-	-	-	-	88.4	83.5
347.8	-	-	-	-	-	79.4
360.9	-	-	-	-	-	71.7
374.0	-	-	-	-	-	64.8
387.1	-	-	-	-	-	58.2
400.3	-	-	-	-	-	50.3
413.4	-	-	-	-	-	40.8
426.5	-	-	-	-	-	31.6
433.1	-	-	-	-	-	29.1

315.0 ft + 196.9 ft

	SWSL-1					SFSL-1
	0 lb	0 lb - 716,600 lb				
	85°	87/85°	75°	65°	55°	15°
ft			1,000 lb			
72.2	-	142.2*	-	-	-	-
78.7	-	140.0*	-	-	-	-
85.3	-	137.8*	-	-	-	-
91.9	114.6	140.0	-	-	-	-
98.4	107.4	137.8	-	-	-	-
108.3	97.1	135.3	-	-	-	134.5
111.5	93.7	134.5	-	-	-	134.1
124.7	82.7	129.0	-	-	-	133.0
137.8	73.2	124.6	-	-	-	132.3
150.9	65.0	120.2	-	-	-	129.3
164.0	58.2	114.6	-	-	-	126.8
177.2	52.2	110.0	122.4	-	-	124.6
190.3	47.0	105.2	121.3	-	-	121.6
203.4	42.3	100.8	119.0	-	-	118.3
213.3	39.2	97.9	116.6	-	-	115.6
216.5	38.1	97.0	115.7	-	-	114.6
223.1	36.4	95.2	113.5	-	-	113.0
229.7	-	-	111.3	-	-	111.4
242.8	-	-	107.6	-	-	107.8
255.9	-	-	103.0	-	-	103.8
259.2	-	-	101.7	99.2	-	102.8
269.0	-	-	97.9	98.8	-	99.9
278.9	-	-	93.9	97.1	-	96.9
282.2	-	-	-	96.6	-	95.9
295.3	-	-	-	93.3	-	91.9
308.4	-	-	-	89.1	-	87.8
321.5	-	-	-	84.7	-	83.0
331.4	-	-	-	80.7	-	79.6
334.6	-	-	-	-	-	78.3
337.9	-	-	-	-	75.0	77.1
347.8	-	-	-	-	73.4	73.6
360.9	-	-	-	-	70.1	68.9
374.0	-	-	-	-	66.4	64.2
377.3	-	-	-	-	65.3	62.9
387.1	-	-	-	-	-	59.0
400.3	-	-	-	-	-	53.4
413.4	-	-	-	-	-	47.6
426.5	-	-	-	-	-	40.6
439.6	-	-	-	-	-	33.0
452.8	-	-	-	-	-	24.9
465.9	-	-	-	-	-	19.1
469.2	-	-	-	-	-	18.1

0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

315.0 ft + 236.2 ft

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
82.0	-	109.1*	-	-	-	-
85.3	-	108.5*	-	-	-	-
91.9	-	106.9*	-	-	-	-
98.4	-	105.6*	-	-	-	-
101.7	93.3	107.4	-	-	-	-
111.5	83.8	105.8	-	-	-	-
121.4	75.8	103.8	-	-	-	103.0
124.7	73.2	103.2	-	-	-	102.7
137.8	64.4	100.3	-	-	-	101.9
150.9	56.7	97.0	-	-	-	100.8
164.0	50.0	93.7	-	-	-	99.4
177.2	44.3	90.2	-	-	-	97.7
190.3	39.2	86.6	-	-	-	95.7
193.6	38.1	85.8	92.4	-	-	95.2
203.4	34.8	83.3	92.2	-	-	93.6
216.5	30.9	79.8	91.1	-	-	91.3
229.7	27.1	76.7	89.5	-	-	88.8
242.8	24.0	73.9	87.5	-	-	86.1
252.6	21.9	71.7	85.7	-	-	84.0
255.9	21.2	71.0	85.1	-	-	83.3
262.5	19.8	69.9	83.8	-	-	81.7
269.0	-	-	82.5	-	-	80.2
282.2	-	-	79.1	72.8	-	77.2
295.3	-	-	76.1	72.8	-	74.3
308.4	-	-	72.5	72.1	-	71.2
318.2	-	-	69.7	70.6	-	68.9
321.5	-	-	-	70.1	-	68.1
334.6	-	-	-	67.9	-	65.0
347.8	-	-	-	64.8	-	61.7
360.9	-	-	-	61.7	-	58.2
364.2	-	-	-	60.8	54.0	57.3
367.5	-	-	-	60.0	54.0	56.4
374.0	-	-	-	-	53.8	54.7
387.1	-	-	-	-	52.0	50.6
400.3	-	-	-	-	49.8	47.0
413.4	-	-	-	-	47.0	43.4
416.7	-	-	-	-	46.1	42.5
426.5	-	-	-	-	-	39.6
439.6	-	-	-	-	-	35.6
452.8	-	-	-	-	-	31.5
465.9	-	-	-	-	-	24.9
479.0	-	-	-	-	-	18.1
492.1	-	-	-	-	-	11.5
498.7	-	-	-	-	-	9.7

315.0 ft + 275.6 ft

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
91.9	-	81.8*	-	-	-	-
98.4	-	80.9*	-	-	-	-
111.5	74.1	80.2	-	-	-	-
124.7	63.9	78.9	-	-	-	-
134.5	57.7	77.8	-	-	-	76.9
137.8	55.6	77.4	-	-	-	76.7
150.9	48.3	75.4	-	-	-	76.1
164.0	41.9	73.2	-	-	-	75.3
177.2	36.4	71.0	-	-	-	74.1
190.3	31.5	68.6	-	-	-	72.6
203.4	27.1	66.1	-	-	-	71.1
210.0	25.2	64.9	66.6	-	-	70.4
216.5	23.4	63.7	66.6	-	-	69.7
229.7	19.8	61.3	66.6	-	-	67.8
242.8	16.8	58.9	66.4	-	-	65.8
255.9	13.9	56.7	65.3	-	-	63.9
269.0	11.2	54.5	63.9	-	-	61.8
282.2	8.8	52.2	62.4	-	-	59.5
288.7	-	51.4	61.6	-	-	58.4
295.3	-	50.5	60.8	-	-	57.3
301.8	-	49.4	59.7	-	-	56.2
305.1	-	-	59.2	50.7	-	55.7
308.4	-	-	58.6	50.7	-	55.1
321.5	-	-	56.7	50.7	-	52.7
334.6	-	-	54.2	50.7	-	50.5
347.8	-	-	51.8	50.3	-	48.3
354.3	-	-	50.7	49.6	-	47.2
360.9	-	-	-	48.9	-	45.9
374.0	-	-	-	47.4	-	43.4
387.1	-	-	-	45.2	-	40.6
393.7	-	-	-	44.1	35.7	39.2
400.3	-	-	-	43.0	35.7	37.9
406.8	-	-	-	41.7	35.6	36.6
413.4	-	-	-	-	35.5	35.3
426.5	-	-	-	-	34.4	32.4
439.6	-	-	-	-	32.6	29.0
452.8	-	-	-	-	30.6	26.2
465.9	-	-	-	-	-	19.0
479.0	-	-	-	-	-	14.8
492.1	-	-	-	-	-	10.8
498.7	-	-	-	-	-	9.0

0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb **36.1-62.3 ft** **27.6 ft** **32.2 ft/s** **360°** **75%**

315.0 ft + 315.0 ft

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
98.4	-	59.5*	-	-	-	-
111.5	-	58.2*	-	-	-	-
121.4	55.3	57.8	-	-	-	-
124.7	54.9	57.5	-	-	-	-
137.8	47.0	56.7	-	-	-	-
147.6	41.7	55.7	-	-	-	55.1
150.9	39.9	55.3	-	-	-	55.0
164.0	34.0	54.0	-	-	-	54.3
177.2	28.7	52.5	-	-	-	53.6
190.3	24.0	51.1	-	-	-	52.7
203.4	19.8	49.4	-	-	-	51.4
216.5	16.1	47.8	-	-	-	50.0
226.4	13.6	46.5	45.2	-	-	49.2
229.7	12.8	46.1	45.2	-	-	48.9
242.8	9.7	44.3	45.2	-	-	47.5
246.1	9.0	43.9	45.2	-	-	47.1
255.9	-	42.5	45.2	-	-	45.9
269.0	-	40.8	45.2	-	-	44.4
282.2	-	39.0	44.8	-	-	42.8
295.3	-	37.5	43.9	-	-	41.2
308.4	-	35.9	42.8	-	-	39.5
321.5	-	34.4	41.7	-	-	37.7
328.1	-	33.6	41.0	31.7	-	36.8
334.6	-	32.8	40.3	31.7	-	35.9
337.9	-	32.6	40.0	31.7	-	35.5
347.8	-	-	38.8	31.7	-	34.3
360.9	-	-	37.5	31.7	-	32.6
374.0	-	-	35.9	31.7	-	30.9
387.1	-	-	34.4	31.5	-	29.1
393.7	-	-	33.5	31.4	-	28.2
400.3	-	-	-	31.3	-	27.2
413.4	-	-	-	30.0	-	25.1
423.2	-	-	-	29.0	20.1	23.6
426.5	-	-	-	28.7	20.1	23.0
439.6	-	-	-	26.9	19.8	20.8
442.9	-	-	-	26.5	19.8	20.3
452.8	-	-	-	-	19.6	18.7
465.9	-	-	-	-	19.2	16.6
479.0	-	-	-	-	17.9	14.0
492.1	-	-	-	-	16.3	11.7
502.0	-	-	-	-	-	9.5

334.6 ft + 118.1 ft

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
55.8	-	216.1*	-	-	-	-
59.1	-	213.8*	-	-	-	-
65.6	-	209.4*	-	-	-	-
72.2	-	213.8	-	-	-	-
75.5	157.6	211.6	-	-	-	-
78.7	151.0	209.4	-	-	-	-
82.0	146.1	207.2	-	-	-	205.0
85.3	141.1	205.0	-	-	-	203.9
91.9	131.2	199.5	-	-	-	202.8
98.4	122.4	195.1	-	-	-	201.7
111.5	108.9	184.1	-	-	-	198.8
124.7	97.0	174.2	-	-	-	195.1
137.8	87.3	165.3	-	-	-	190.7
150.9	79.4	158.7	187.4	-	-	185.6
164.0	-	-	180.8	-	-	180.0
177.2	-	-	172.0	-	-	174.2
190.3	-	-	163.1	-	-	168.4
203.4	-	-	153.2	-	-	161.7
206.7	-	-	151.0	-	-	159.8
216.5	-	-	-	-	-	154.3
226.4	-	-	-	143.3	-	148.8
229.7	-	-	-	142.2	-	147.0
242.8	-	-	-	134.5	-	139.8
255.9	-	-	-	125.7	-	132.3
262.5	-	-	-	120.2	-	128.6
269.0	-	-	-	-	-	124.9
282.2	-	-	-	-	-	117.6
292.0	-	-	-	-	106.9	112.1
295.3	-	-	-	-	105.4	110.2
308.4	-	-	-	-	98.3	100.8
315.0	-	-	-	-	94.6	96.1
321.5	-	-	-	-	-	91.6
334.6	-	-	-	-	-	82.7
347.8	-	-	-	-	-	74.7
360.9	-	-	-	-	-	67.2
374.0	-	-	-	-	-	60.2
387.1	-	-	-	-	-	50.3
400.3	-	-	-	-	-	40.4
410.1	-	-	-	-	-	33.7

0 lb **143,300 lb** **275,600 lb** **363,800 lb** **452,000 lb** **540,200 lb** **628,400 lb** **716,600 lb**

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

334.6 ft + 157.5 ft

	SWSL-1					SFSL-1
	0 lb					
	0 lb - 716,600 lb					
	85°	87/85°	75°	65°	55°	15°
ft						
65.6	-	167.6*	-	-	-	-
72.2	-	164.2*	-	-	-	-
78.7	-	160.9*	-	-	-	-
85.3	127.9	164.2	-	-	-	-
91.9	119.0	162.0	-	-	-	-
95.1	114.6	160.4	-	-	-	155.4
98.4	110.2	158.7	-	-	-	155.4
111.5	97.7	152.1	-	-	-	154.0
124.7	86.4	145.5	-	-	-	151.8
137.8	76.9	138.9	-	-	-	148.8
150.9	69.0	132.3	-	-	-	145.9
164.0	62.4	125.7	-	-	-	142.6
167.3	60.9	124.3	141.1	-	-	141.6
177.2	56.4	120.2	138.9	-	-	138.9
187.0	52.7	117.9	135.6	-	-	135.6
190.3	-	-	134.5	-	-	134.5
203.4	-	-	127.9	-	-	129.7
216.5	-	-	122.4	-	-	124.6
229.7	-	-	115.7	-	-	119.4
242.8	-	-	109.8	-	-	114.2
246.1	-	-	108.2	111.3	-	112.9
255.9	-	-	-	109.1	-	108.9
269.0	-	-	-	104.5	-	103.6
282.2	-	-	-	98.8	-	98.3
295.3	-	-	-	92.8	-	92.8
301.8	-	-	-	89.5	-	90.2
308.4	-	-	-	-	-	87.5
321.5	-	-	-	-	80.5	81.5
334.6	-	-	-	-	76.1	75.8
347.8	-	-	-	-	71.2	70.3
351.1	-	-	-	-	70.1	68.9
360.9	-	-	-	-	-	64.7
374.0	-	-	-	-	-	59.1
387.1	-	-	-	-	-	53.2
400.3	-	-	-	-	-	47.0
413.4	-	-	-	-	-	40.6
426.5	-	-	-	-	-	32.0
439.6	-	-	-	-	-	23.5
449.5	-	-	-	-	-	19.6

334.6 ft + 196.9 ft

	SWSL-1					SFSL-1
	0 lb					
	0 lb - 716,600 lb					
	85°	87/85°	75°	65°	55°	15°
ft						
75.5	-	127.9*	-	-	-	-
78.7	-	126.8*	-	-	-	-
85.3	-	124.6*	-	-	-	-
91.9	-	126.8	-	-	-	-
95.1	104.1	125.7	-	-	-	-
98.4	100.5	124.6	-	-	-	-
108.3	90.9	122.1	-	-	-	120.2
111.5	87.7	121.3	-	-	-	119.8
124.7	77.2	116.8	-	-	-	118.7
137.8	68.3	112.4	-	-	-	117.9
150.9	60.6	107.8	-	-	-	115.7
164.0	54.0	103.2	-	-	-	113.2
177.2	48.3	98.5	-	-	-	110.2
183.7	45.9	96.3	108.5	-	-	110.0
190.3	43.4	94.1	107.6	-	-	108.4
203.4	39.0	90.2	105.6	-	-	105.1
213.3	36.0	87.5	103.1	-	-	102.7
216.5	35.1	86.6	102.3	-	-	101.9
226.4	32.4	84.2	99.3	-	-	99.1
229.7	-	-	98.3	-	-	98.2
242.8	-	-	94.1	-	-	94.4
255.9	-	-	89.9	-	-	90.4
269.0	-	-	85.5	84.2	-	86.2
282.2	-	-	80.9	82.2	-	82.2
295.3	-	-	-	79.1	-	78.0
308.4	-	-	-	75.4	-	73.9
321.5	-	-	-	71.2	-	69.9
334.6	-	-	-	66.8	-	65.5
337.9	-	-	-	65.7	-	64.4
347.8	-	-	-	-	59.3	61.1
360.9	-	-	-	-	56.7	56.7
374.0	-	-	-	-	53.4	52.0
387.1	-	-	-	-	49.6	47.5
390.4	-	-	-	-	48.7	46.3
400.3	-	-	-	-	-	43.0
413.4	-	-	-	-	-	38.4
426.5	-	-	-	-	-	33.7
439.6	-	-	-	-	-	29.0
452.8	-	-	-	-	-	24.3
465.9	-	-	-	-	-	17.0
479.0	-	-	-	-	-	11.1
485.6	-	-	-	-	-	8.8



0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 27.6 ft 32.2 ft/s 360° 75%

334.6 ft + 236.2 ft

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
82.0	-	98.3*	-	-	-	-
85.3	-	97.9*	-	-	-	-
91.9	-	96.6*	-	-	-	-
98.4	-	95.2*	-	-	-	-
105.0	83.8	96.1	-	-	-	-
111.5	78.0	95.0	-	-	-	-
121.4	70.4	93.2	-	-	-	92.2
124.7	67.9	92.6	-	-	-	91.9
137.8	59.5	89.7	-	-	-	91.1
150.9	52.2	86.6	-	-	-	90.0
164.0	46.1	83.6	-	-	-	88.6
177.2	40.6	80.2	-	-	-	86.6
190.3	35.7	76.9	-	-	-	84.5
200.1	32.6	74.5	80.9	-	-	83.0
203.4	31.5	73.6	80.9	-	-	82.4
216.5	27.6	70.5	80.0	-	-	80.0
229.7	24.3	67.7	78.5	-	-	77.5
242.8	21.2	64.8	76.5	-	-	75.0
252.6	19.0	63.0	74.4	-	-	73.0
255.9	18.3	62.4	73.6	-	-	72.3
262.5	17.2	61.3	72.3	-	-	70.9
269.0	-	-	71.0	-	-	69.3
282.2	-	-	68.1	-	-	66.2
292.0	-	-	65.8	61.1	-	64.0
295.3	-	-	65.0	61.1	-	63.3
308.4	-	-	61.9	60.0	-	60.2
321.5	-	-	58.6	58.6	-	57.0
334.6	-	-	-	56.0	-	54.0
347.8	-	-	-	53.1	-	50.8
360.9	-	-	-	50.0	-	47.4
374.0	-	-	-	47.0	40.8	43.7
377.3	-	-	-	46.1	40.8	42.8
387.1	-	-	-	-	39.7	40.3
400.3	-	-	-	-	37.5	36.8
413.4	-	-	-	-	35.1	33.3
426.5	-	-	-	-	32.4	29.5
439.6	-	-	-	-	-	25.6
452.8	-	-	-	-	-	21.6
465.9	-	-	-	-	-	17.8
479.0	-	-	-	-	-	13.9
492.1	-	-	-	-	-	9.9

334.6 ft + 275.6 ft

ft	SWSL-1					SFSL-1
	0 lb					0 lb - 716,600 lb
	85°	87/85°	75°	65°	55°	15°
91.9	-	73.4*	-	-	-	-
98.4	-	72.5*	-	-	-	-
111.5	-	71.9	-	-	-	-
114.8	65.7	71.4	-	-	-	-
124.7	58.9	70.5	-	-	-	-
134.5	52.7	69.2	-	-	-	68.3
137.8	50.7	68.8	-	-	-	68.1
150.9	43.9	67.0	-	-	-	67.4
164.0	37.7	64.8	-	-	-	66.5
177.2	32.6	62.6	-	-	-	65.5
190.3	28.0	60.2	-	-	-	63.8
203.4	23.8	58.0	-	-	-	62.3
216.5	20.1	55.8	58.0	-	-	60.8
229.7	16.8	53.4	58.0	-	-	59.1
242.8	13.9	50.9	57.1	-	-	57.2
255.9	11.0	48.7	56.0	-	-	55.1
265.7	9.3	47.3	55.0	-	-	53.6
269.0	-	46.7	54.7	-	-	53.1
282.2	-	44.8	52.9	-	-	50.9
292.0	-	43.4	51.6	-	-	49.1
295.3	-	43.0	51.1	-	-	48.5
301.8	-	42.3	50.2	-	-	47.3
308.4	-	-	49.2	-	-	46.2
315.0	-	-	48.2	41.4	-	45.0
321.5	-	-	47.2	41.4	-	43.8
334.6	-	-	45.0	41.2	-	41.4
347.8	-	-	42.8	40.3	-	39.0
360.9	-	-	40.3	38.6	-	36.5
374.0	-	-	-	36.8	-	34.2
387.1	-	-	-	34.8	-	31.5
400.3	-	-	-	32.6	-	28.6
403.5	-	-	-	32.1	25.1	27.9
413.4	-	-	-	30.4	24.5	25.8
426.5	-	-	-	-	23.4	23.0
439.6	-	-	-	-	21.6	20.1
452.8	-	-	-	-	19.8	17.2
465.9	-	-	-	-	17.9	14.4
479.0	-	-	-	-	-	11.1
485.6	-	-	-	-	-	9.3

0 lb 143,300 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



SWSL / SFSL

SUPERLIFT 3800

 **363,800 lb +  110,200 lb**  **36.1-62.3 ft**  **27.6 ft**  **32.2 ft/s** **360°** **75%**

 **354.3 ft +  118.1 ft**

	SWSL-1					SFSL-1
	0 lb					
	0 lb - 716,600 lb					
	85°	87/85°	75°	65°	55°	15°
ft						
59.1	-	191.8*	-	-	-	-
65.6	-	188.5*	-	-	-	-
72.2	-	184.1*	-	-	-	-
75.5	147.7	189.6	-	-	-	-
78.7	142.2	188.5	-	-	-	-
85.3	132.3	184.1	-	-	-	181.9
91.9	123.5	179.7	-	-	-	180.8
98.4	115.7	175.3	-	-	-	179.7
111.5	102.5	166.4	-	-	-	176.7
124.7	91.3	156.5	-	-	-	173.4
137.8	82.0	148.8	-	-	-	169.8
150.9	74.3	142.2	-	-	-	164.6
154.2	-	-	164.2	-	-	163.3
164.0	-	-	159.8	-	-	159.4
177.2	-	-	153.2	-	-	153.2
190.3	-	-	144.4	-	-	147.3
203.4	-	-	135.6	-	-	141.1
213.3	-	-	129.0	-	-	136.1
216.5	-	-	-	-	-	134.5
229.7	-	-	-	-	-	127.1
232.9	-	-	-	120.2	-	125.3
242.8	-	-	-	115.7	-	120.2
255.9	-	-	-	108.0	-	113.5
269.0	-	-	-	100.1	-	106.5
272.3	-	-	-	97.9	-	104.7
282.2	-	-	-	-	-	99.5
295.3	-	-	-	-	-	92.6
305.1	-	-	-	-	82.7	87.5
308.4	-	-	-	-	81.1	85.8
321.5	-	-	-	-	75.0	79.1
324.8	-	-	-	-	73.2	77.4
334.6	-	-	-	-	-	72.3
347.8	-	-	-	-	-	65.6
360.9	-	-	-	-	-	58.8
374.0	-	-	-	-	-	52.0
387.1	-	-	-	-	-	45.5
400.3	-	-	-	-	-	38.6
413.4	-	-	-	-	-	31.5
426.5	-	-	-	-	-	23.7
429.8	-	-	-	-	-	22.5

 **354.3 ft +  157.5 ft**

	SWSL-1					SFSL-1
	0 lb					
	0 lb - 716,600 lb					
	85°	87/85°	75°	65°	55°	15°
ft						
65.6	-	147.7*	-	-	-	-
72.2	-	145.5*	-	-	-	-
78.7	-	142.2*	-	-	-	-
85.3	119.0	145.5	-	-	-	-
91.9	111.3	142.2	-	-	-	-
98.4	104.1	140.0	-	-	-	138.9
111.5	91.3	134.5	-	-	-	136.7
124.7	80.7	127.9	-	-	-	134.5
137.8	71.9	122.4	-	-	-	132.3
150.9	64.4	115.7	-	-	-	128.6
164.0	57.8	110.2	-	-	-	125.3
170.6	55.0	108.0	123.5	-	-	123.8
177.2	52.2	105.8	122.4	-	-	122.4
190.3	47.4	101.6	117.9	-	-	117.2
203.4	-	-	112.4	-	-	112.7
216.5	-	-	107.4	-	-	108.7
229.7	-	-	101.6	-	-	103.4
242.8	-	-	95.7	-	-	98.1
249.3	-	-	92.6	-	-	95.5
255.9	-	-	-	92.2	-	92.8
269.0	-	-	-	88.0	-	87.7
282.2	-	-	-	82.9	-	82.5
295.3	-	-	-	77.6	-	77.2
308.4	-	-	-	72.1	-	71.9
321.5	-	-	-	-	-	66.6
331.4	-	-	-	-	61.3	62.6
334.6	-	-	-	-	60.4	61.3
347.8	-	-	-	-	56.2	56.1
360.9	-	-	-	-	51.8	51.0
364.2	-	-	-	-	50.7	49.8
374.0	-	-	-	-	-	46.1
387.1	-	-	-	-	-	40.5
400.3	-	-	-	-	-	34.9
413.4	-	-	-	-	-	29.8
426.5	-	-	-	-	-	24.5
439.6	-	-	-	-	-	19.6
452.8	-	-	-	-	-	15.0
465.9	-	-	-	-	-	10.6

 **0 lb** **143,300 lb** **275,600 lb** **363,800 lb** **452,000 lb** **540,200 lb** **628,400 lb** **716,600 lb**

* Main boom angle 87°

Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1

SWSL / SFSL

SUPERLIFT 3800

 **363,800 lb +**
 **110,200 lb**
 **36.1-62.3 ft**
 **27.6 ft**
 **32.2 ft/s**
360°
75%

 **354.3 ft +**
 **196.9 ft**

	SWSL-1					SFSL-1
	0 lb	0 lb - 716,600 lb				
	85°	87/85°	75°	65°	55°	15°
ft						
75.5	-	114.6*	-	-	-	-
78.7	-	113.5*	-	-	-	-
85.3	-	111.3*	-	-	-	-
91.9	-	110.2*	-	-	-	-
95.1	97.0	112.4	-	-	-	-
98.4	93.5	111.3	-	-	-	-
111.5	81.6	108.2	-	-	-	107.4
124.7	71.7	104.5	-	-	-	105.9
137.8	63.1	100.1	-	-	-	104.7
150.9	56.0	95.9	-	-	-	102.4
164.0	49.8	91.5	-	-	-	100.0
177.2	44.3	87.3	-	-	-	97.7
187.0	40.8	84.3	94.4	-	-	95.6
190.3	39.7	83.3	93.9	-	-	94.9
203.4	35.5	79.8	91.7	-	-	91.8
216.5	31.7	76.5	88.8	-	-	88.4
226.4	29.1	74.5	85.9	-	-	85.9
229.7	-	-	84.9	-	-	85.0
242.8	-	-	81.1	-	-	81.2
255.9	-	-	76.9	-	-	77.2
269.0	-	-	72.8	-	-	72.9
278.9	-	-	69.8	68.3	-	69.7
282.2	-	-	68.8	67.9	-	68.7
288.7	-	-	66.8	66.5	-	66.7
295.3	-	-	-	65.0	-	64.6
308.4	-	-	-	61.5	-	60.5
321.5	-	-	-	57.8	-	56.3
334.6	-	-	-	54.0	-	52.0
347.8	-	-	-	50.0	-	47.8
357.6	-	-	-	-	42.8	44.6
360.9	-	-	-	-	42.1	43.6
374.0	-	-	-	-	39.2	39.5
387.1	-	-	-	-	36.2	35.3
400.3	-	-	-	-	33.1	31.3
413.4	-	-	-	-	-	27.1
426.5	-	-	-	-	-	23.0
439.6	-	-	-	-	-	19.0
452.8	-	-	-	-	-	14.8
465.9	-	-	-	-	-	10.7
469.2	-	-	-	-	-	9.7


0 lb
143,300 lb
275,600 lb
363,800 lb
452,000 lb
540,200 lb
628,400 lb
716,600 lb

* Main boom angle 87°



Main boom angle 87°, 85°, 75° and 65°, capacities for intermediate boom positions are calculated by the crane control system IC-1



LVSL

15°

SUPERLIFT 3800

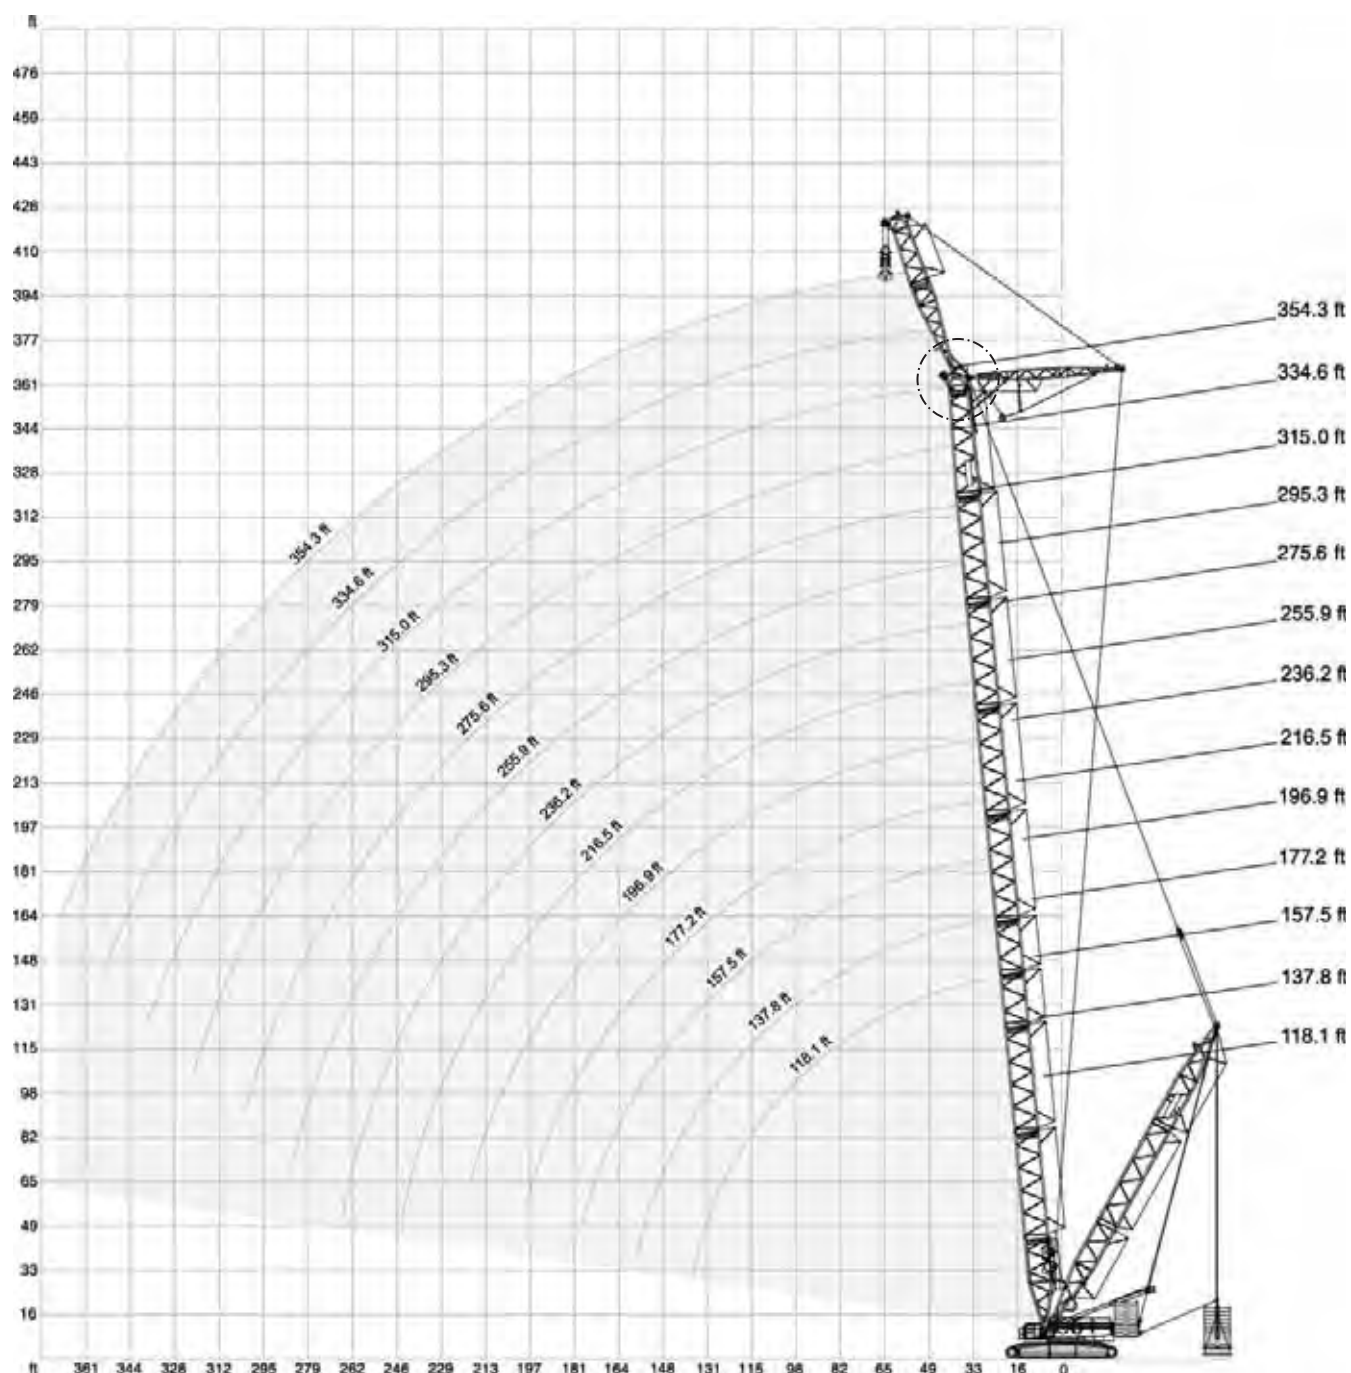

* Attachable

LVSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 59 ft 15° 27.6 ft 32.2 ft/s 360° 75%

		118.1 ft		137.8 ft		157.5 ft		177.2 ft		196.9 ft		216.5 ft		236.2 ft	
		LVSL_1													
	0 lb	0 lb- 716.6 klb	0 lb	0 lb- 716.6 klb	0 lb	0 lb- 716.6 klb	0 lb	0 lb- 716.6 klb	0 lb	0 lb- 716.6 klb	0 lb	0 lb- 716.6 klb	0 lb	0 lb- 716.6 klb	
ft	1,000 lb														
42.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
45.9	-	-	438.7	765.0	418.9	765.0	-	-	-	-	-	-	-	-	
49.2	-	-	405.7	765.0	388.0	765.0	372.6	765.0	357.1	736.3	-	-	-	-	
52.5	-	-	377.0	765.0	361.6	765.0	346.1	765.0	332.9	736.3	319.7	648.2	306.4	577.6	
59.1	-	-	328.5	765.0	315.3	765.0	304.2	765.0	291.0	734.1	280.0	648.2	269.0	577.6	
65.6	-	-	291.0	765.0	277.8	765.0	266.8	765.0	255.7	720.9	246.9	648.2	235.9	577.6	
72.2	257.9	765.0	255.7	765.0	246.9	765.0	238.1	765.0	227.1	712.1	220.5	639.3	210.5	577.6	
78.7	224.9	765.0	222.7	765.0	220.5	758.4	213.8	754.0	203.9	705.5	197.3	632.7	187.4	571.0	
85.3	199.5	709.9	197.3	705.5	194.0	701.1	190.7	696.7	184.1	692.3	176.4	626.1	168.7	564.4	
91.9	178.6	657.0	175.3	652.6	172.0	646.0	168.7	641.5	165.3	639.3	158.7	619.5	151.0	560.0	
98.4	159.8	608.5	156.5	604.1	153.2	599.7	149.9	595.2	146.6	590.8	143.3	588.6	136.7	553.4	
111.5	131.9	520.3	128.6	530.6	125.3	526.2	122.1	521.8	119.1	517.4	116.8	515.1	112.6	500.4	
124.7	108.9	439.5	105.5	465.2	101.7	461.5	98.3	457.8	95.2	453.4	93.3	451.2	90.2	447.5	
137.8	90.8	377.0	87.1	407.9	82.5	405.7	78.3	403.4	74.7	399.0	72.5	396.8	69.4	394.6	
150.9	77.0	318.2	72.7	349.1	68.0	363.0	63.7	359.4	59.9	356.4	57.7	354.2	54.5	352.0	
164.0	64.4	271.2	60.2	298.4	55.4	321.1	51.0	321.1	47.0	318.2	44.7	316.0	41.3	313.8	
167.3	61.5	257.9	57.5	287.7	52.7	310.9	48.3	313.1	44.2	309.7	41.9	307.5	38.5	305.3	
177.2	-	-	49.6	255.7	44.5	280.0	40.1	288.8	35.9	284.4	33.5	282.2	30.0	280.0	
183.7	-	-	45.2	240.3	40.4	259.4	35.9	274.1	31.7	271.9	29.2	269.7	25.6	266.8	
190.3	-	-	-	-	36.3	241.8	31.7	259.4	27.4	259.4	24.8	257.2	21.2	253.5	
200.1	-	-	-	-	30.4	218.3	25.9	235.9	21.5	240.9	18.8	239.6	14.9	235.3	
203.4	-	-	-	-	-	-	24.3	227.1	19.8	234.8	17.0	234.4	13.1	230.4	
210.0	-	-	-	-	-	-	20.9	210.9	16.4	222.7	13.6	224.1	9.5	220.5	
216.5	-	-	-	-	-	-	17.6	200.6	13.0	210.5	10.1	213.8	-	210.5	
223.1	-	-	-	-	-	-	-	-	10.1	195.1	-	203.9	-	202.1	
229.7	-	-	-	-	-	-	-	-	-	182.6	-	194.0	-	193.6	
232.9	-	-	-	-	-	-	-	-	-	178.6	-	189.0	-	189.4	
242.8	-	-	-	-	-	-	-	-	-	-	-	170.9	-	176.4	
252.6	-	-	-	-	-	-	-	-	-	-	-	155.4	-	163.1	
255.9	-	-	-	-	-	-	-	-	-	-	-	-	-	158.7	
269.0	-	-	-	-	-	-	-	-	-	-	-	-	-	137.8	

0 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb



LVSL

SUPERLIFT 3800

363,800 lb + 110,200 lb 36.1-62.3 ft 59 ft 15° 27.6 ft 32.2 ft/s 360° 75%

	255.9 ft		275.6 ft		295.3 ft		315.0 ft		334.6 ft		354.3 ft	
	LVSL_1											
	0 lb	0lb-716.6klb	0 lb	0lb-716.6klb	0 lb	0lb-716.6klb	0 lb	0lb-716.6klb	0 lb	0lb-716.6klb	0 lb	0lb-716.6klb
ft	1,000 lb											
55.8	275.6	478.4	264.6	432.1	-	-	-	-	-	-	-	-
59.1	257.9	478.4	246.9	432.1	238.1	385.8	227.1	346.1	-	-	-	-
62.3	242.5	478.4	231.5	429.9	222.7	385.8	212.7	346.1	203.9	308.6	194.0	275.6
65.6	229.3	478.4	219.4	429.9	209.4	385.8	199.5	346.1	190.7	308.6	181.9	275.6
72.2	202.8	476.2	194.0	427.7	185.2	381.4	176.4	343.9	168.7	306.4	159.8	273.4
78.7	180.8	471.8	173.1	423.3	165.3	379.2	156.5	341.7	148.8	304.2	141.1	271.2
85.3	162.0	467.4	154.3	418.9	146.6	374.8	138.9	337.3	132.3	302.0	124.6	269.0
91.9	145.5	463.0	137.8	414.5	131.2	370.4	123.5	332.9	116.8	295.4	110.2	264.6
98.4	131.2	458.6	123.5	410.1	116.8	366.0	110.2	328.5	104.1	291.0	97.2	260.1
111.5	108.2	443.9	101.3	396.8	95.1	355.7	88.6	318.2	82.6	283.7	76.2	252.8
124.7	87.3	420.3	81.7	381.4	76.0	343.9	69.7	307.2	63.9	274.1	57.8	244.0
137.8	68.3	392.4	64.8	368.2	59.5	330.7	53.4	295.4	47.8	262.4	41.9	233.7
150.9	53.2	349.8	50.0	340.2	46.6	316.0	40.7	282.2	35.5	250.6	29.7	223.4
164.0	40.0	312.3	36.8	309.4	34.4	296.9	29.4	269.7	24.3	238.8	18.6	213.0
173.9	31.5	288.1	28.2	284.0	25.8	279.3	21.9	260.9	16.8	230.0	11.0	205.0
177.2	28.7	280.0	25.4	275.6	22.9	273.4	19.4	257.9	14.3	227.1	-	202.8
183.7	24.2	266.8	20.9	263.1	18.4	260.9	14.7	251.3	9.9	222.7	-	197.3
190.3	19.7	253.5	16.4	250.6	13.8	248.4	9.9	244.7	-	216.6	-	191.8
196.9	15.2	240.3	11.9	238.1	9.3	235.9	-	231.5	-	210.5	-	186.3
200.1	13.4	234.4	9.9	231.5	-	230.6	-	226.3	-	207.6	-	183.5
203.4	11.5	228.5	-	226.4	-	225.2	-	221.2	-	204.7	-	180.8
206.7	9.7	222.7	-	221.3	-	219.9	-	216.1	-	201.7	-	178.0
216.5	-	209.4	-	206.1	-	203.9	-	200.6	-	192.9	-	169.8
229.7	-	192.5	-	189.2	-	187.0	-	183.7	-	178.9	-	158.7
242.8	-	176.7	-	173.4	-	171.2	-	167.9	-	164.6	-	148.3
255.9	-	162.0	-	158.7	-	156.5	-	153.2	-	149.9	-	137.8
269.0	-	146.6	-	147.0	-	144.2	-	140.4	-	137.4	-	128.2
282.2	-	128.6	-	135.6	-	132.3	-	129.0	-	125.7	-	118.7
285.4	-	123.5	-	131.2	-	129.5	-	126.2	-	122.9	-	116.3
295.3	-	-	-	117.9	-	121.3	-	117.9	-	114.6	-	109.1
301.8	-	-	-	109.1	-	114.1	-	112.8	-	109.8	-	104.4
308.4	-	-	-	-	-	107.0	-	107.7	-	104.9	-	99.7
321.5	-	-	-	-	-	91.7	-	95.4	-	95.7	-	90.5
334.6	-	-	-	-	-	-	-	81.1	-	84.4	-	81.6
337.9	-	-	-	-	-	-	-	77.6	-	81.2	-	79.2
347.8	-	-	-	-	-	-	-	-	-	71.5	-	72.0
354.3	-	-	-	-	-	-	-	-	-	65.0	-	67.2
360.9	-	-	-	-	-	-	-	-	-	-	-	61.5
370.7	-	-	-	-	-	-	-	-	-	-	-	52.7

0 lb 275,600 lb 363,800 lb 452,000 lb 540,200 lb 628,400 lb 716,600 lb



TECHNICAL DESCRIPTION

SUPERLIFT 3800

Crawler carrier

Carbody	3-section carrier comprising of carbody and two crawlers. Hydraulic pin connections between crawlers and carbody provide for easy assembly and removal to minimise width and weight for transportation. Track width: 27.6 ft. Bending- and torsion-resistant welded structure of box type construction, fabricated of high-strength fine grain structural steel.
Crawlers	Bending-resistant welded structure of high-strength fine grain structural steel. Automatic centralised lubrication is included as standard. 16 rollers on each side frame with hardened rolling surfaces. Raised position for both drive sprockets and idler wheels, drive sprockets and idler wheels provide load bearing capacity for erection, adjustable track tension. Crawler pads: 4.9 ft wide.
Crawler drive	The tracks are powered by one hydraulic motor each through closed planetary gear reduction units running in oil bath, equipped with spring-applied hydraulically released holding brakes; the gear units are of very compact design to fit within the width of the crawlers. Each crawler is infinitely variable controlled, both independently and in opposite direction. Tractive effort: 314,732 lbf per side.
Assembly jacks	Four hydraulic jacking cylinders on carbody (folding within 9.8 ft width) for easy assembly of crawlers.

Superstructure

Counterweight	452,000 lb counterweight on superstructure combination with 110,200 lb central ballast. Steelbox type. Weight of counterweight blocks: 22,050 lb.
Frame	Torsion-resistant welded structure fabricated of high-strength fine grain structural steel.
Slew ring	Triple-row roller bearing slew ring with external ring gear for ease of service and maintenance. Central lubrication system.
Drive	Water-cooled 8-cylinder MTU diesel engine type OM 502 LA, 405 kW (550 HP) at 1800 rpm. Max. torque 1917 lb-ft at 1300 rpm. The engine complies with EUROMOT 3b, resp. Tier 4i. Pump distribution gearbox with five variable displacement axial piston pumps, and gear pumps. AdBlue tank and SCR catalytic converter. Sound insulation covering. Fuel tank capacity: 317 gallons.
Rope drums	The standard superstructure equipment includes three rope drums – hoist 1, 2 and boom hoist. The drums are powered by hydraulic motors through closed planetary gear units running in oil bath. All rope drums have spring-applied, hydraulically released multi-disk brakes and non-wearing hydraulic braking for load lowering. Rope ends H 1, 2, 3 and W 1, 2 equipped with quick-connect rope end-fittings. All winches are removable to minimise weight for transportation.
A-frame	Hydraulic raising systems for A-frame as standard. A-frame, boom hoist and sheave sets for boom hoist can be dismantled as one single transport unit to minimise transport weight. Dismantling of hoist 1 and 2 possible without removing A-frame first.
Slew unit	Powered by hydraulic motors through 2 closed, planetary gear units running in oil bath. Spring-applied, hydraulically released holding brakes and non-wearing hydraulic braking. Slew speed infinitely variable 0-1 rpm.
Control system	Terex IC-1: Electronic proportional valve pilot control integrated in stored-program control system incl. diagnostic system. Two monitors with colour displays, load moment indicator operated via a touch screen. Working speeds infinitely variable controlled by the lever position. Automatic power control for optimal utilisation of engine output; emergency control systems. Additional functions: • Infinitely variable position of Superlift counterweight with the optional adjustable Superlift system 36.1 - 62.3 ft • Infinitely variable position of main boom angle in SWSL configuration 55-87° (65-87° in SW configuration) • Working area limitation • Diagnosis and troubleshooting • User defined joystick mode The crane is controlled by joystick levers ergonomically positioned in the crane cab. Wireless rigging remote control. Wireless emergency remote control.
Cab	Comfortable cab with large windscreen and air condition. Safety-glazing all around, roof window, self-contained hot air heater, full instrumentation and crane controls. Air-cushioned operator seat, emergency seat, multiple storage areas, 12-V power plug. The cab can be tilted back for improved operator view of boom point. A camera system is installed to monitor the rope drums. Front window can be opened. Dashboard can be adjusted for optimum ergonomics and view. Front wiper with resting position outside of window area for optimum view. For transportation, the cab swings hydraulically in front of the superstructure to minimise width.
Electrical equipment	24 V DC. system (4 x batteries 12 V, 95 Ah).
Operator aids	Load moment indicator integrated in IC-1 control (load moment, radius, angles, safety and engine and hydraulic system monitoring), hoist limit switch, limit switches for boom movements, hydraulic boom backstop, position light, anemometer.

Optional equipment

Hydraulic quick connection	
Crawler pads	6.6 ft.
Quadro drive	2 drives for each crawler carrier 2600 kN tractive force – at reduced drive speed.
Alternative counterweights made of cast iron	
Alternative counterweight segmentation	
	22,050 lb + 16,535 lb or 22,050 lb + 33,070 lb
Hydraulic cylinder on A-frame	For self-assembly of crawler carrier.
Hydraulic cylinder with or without hydraulic unit	For boom pinning.
Additional lateral outrigger system	For erection of long boom systems.



TECHNICAL DESCRIPTION

SUPERLIFT 3800

Boom configurations

Main boom	SH_1:	Length	78.7 – 315.0 ft
Main boom with Superlift (SL)	SSL_1:	Length	118.1 – 354.3 ft
Luffing jib	W:	Length	78.7 – 315.0 ft
Fixed fly jib (for vessel lift)	LV:	Length	59.0 ft
Light fixed fly jib	LF:	Length	39.4 – 118.1 ft
Stepped main boom	LH_1:	Length (374.0 ft based on SW_1)	118.1 – 374.0 ft 275.6 ft + 157.5 ft
Stepped main boom with SL	LSL_1:	Length (472.5 ft based on SWSL_1)	236.2 – 472.5 ft 275.6 ft + 236.2 ft
Stepped main boom with SL	LSL_2:	Length (472.5 ft based on SWSL_1)	177.2 – 472.5 ft 315.0 ft + 196.9 ft

Combinations

Main boom + luffing fly jib	SW_1:	max. length	216.5 ft + 315.0 ft 236.2 ft + 216.5 ft
Main boom with SL + luffing fly jib	SWSL_1:	max. length	315.0 ft + 315.0 ft 334.6 ft + 295.3 ft 354.3 ft + 196.9 ft
Main boom with SL + fixed fly jib	LVSL_1:	max. length	354.3 ft + 39.4 ft
Main boom + LF	SH+LF_1:	max. length	275.6 ft + 118.1 ft 295.3 ft + 78.7 ft 315.0 ft + 39.4 ft
Main boom with Superlift (SL) + LF	SSL+LF_1:	max. length	354.3 ft + 118.1 ft
Stepped main boom + LF	LH+LF_1:	max. length (374.0 ft based on SW_1)	334.6 ft + 118.1 ft 354.3 ft + 78.7 ft 374.0 ft + 39.4 ft 275.6 ft + 157.5 ft
Stepped main boom + LF (special LF linkage head, 9.8 ft section steps optional,	LH+LF_3:	max. length 364.2 ft based on SW_1	364.2 ft + 39.4 ft 275.6 ft + 157.5 ft
Stepped main boom with SL + LF	LSL+LF_2:	max. length (472.5 ft based on SWSL_1)	472.5 ft + 118.1 ft 315.0 ft + 196.9 ft
Stepped main boom with SL + LF (special LF linkage head, 9.8 ft section steps optional,	LSL+LF_3:	max. length 482.3 ft based on SWSL_1	482.3 ft + 39.4 ft 354.3 ft + 196.9 ft
Stepped main boom with SL + LF (special LF linkage head, 9.8 ft section steps optional,	LSL+LF_4:	max. length 521.7 ft based on SWSL_1	521.7 ft + 39.4 ft 354.3 ft + 196.9 ft + 39.4 ft heavy section)
Reeving winch	Mounted on superstructure.		
Operator aids	Load moment indicator, hoist limit switch, limit switches for boom movements, hydraulic boom backstops, anemometer.		

Optional equipment

Standard SL	118.1 ft Superlift mast incl. hoist W2. SL pendant bars, mast back stop cylinders, SL tray. Superlift counterweight 0 lb at radius 29.5 ft or 0-716,600 lb on counterweight tray at fixed radii 36.1 ft, 42.6 ft, 49.2 ft, 55.8 ft and 62.3 ft.
Variable SL	Variable 118.1 ft Superlift mast (see Standard SL). Additional vertical hydraulic cylinders and stabilisation winch on superstructure (prevents weaving of counterweight especially when traveling and slewing). Height compensation using the cylinders, lifting across obstacles possible to a certain extent. Superlift counterweight 0 lb at radius 29.5 ft or 0-716,600 lb on counterweight tray, indefinitely variable from 36.1-62.3 ft.
SL counterweight carrier	Superlift mast (see Standard SL). Telescopic frame and counterweight carrier for total weight of 716,600 lb, with 4 wheels / 2 axles (driven and steered – full manoeuvrability for slewing, trailing, and parallel modes). Superlift counterweight 88,200-716,600 lb on counterweight carrier with fixed mast radius approx. 52.5 ft; infinitely adjustable from 42.6-55.8 ft or 55.8-62.3 ft resp. with telescopic frame. The counterweight carrier allows for traveling or slewing even when the Superlift counterweight does not lift off the ground (e.g. crane with loads as indicated by load chart values in brackets).
Hoist H3	Additional hoist for main boom (to operate LF or runner), line pull same as H1, length 2133 ft.
Runner	Max. lifting capacity 119,100 lb. Mounted on boom head and boom / jib top. Operation by hoist rope 3 (see variable SL).
Runner for LF standard	Max. lifting capacity 39,700 lb. Operated by rope 3.
Special LF linkage head	Without sheave set for higher lifting capacities when using LF. Required for LH+LF_3, LSL+LF_3 and LSL+LF_4.
9.8 ft intermediate section	For 9.8 ft-intermediate lengths when using LH+LF_3, LSL+LF_3 and LSL+LF_4 combination.
Fall protection	



NOTES TO LIFTING CAPACITY

SUPERLIFT 3800

Ratings are in compliance with ISO 4305.

Lifting capacities do not exceed 75% of tipping load.

Weight of hook blocks and slings is part of the load, and is to be deducted from the capacity ratings.

Consult operation manual for further details.

Note: Data published herein is intended as a guide only and shall not be construed to warrant applicability for lifting purposes.

Crane operation is subject to the computer charts and operation manual both supplied with the crane.

In some instances the superlift counterweight does not lift off the ground with the indicated load.



SUPERLIFT 3800

Effective Date: March 2013.

Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex® is a registered trademark of Terex Corporation in the USA and many other countries.

Copyright 2013 Terex Corporation

Terex Cranes, Global Marketing, Dinglerstraße 24, 66482 Zweibrücken, Germany
Tel. +49 (0) 6332 830, Email: info.cranes@terex.com, www.terexcranes.com



www.terexcranes.com

Bigge Crane and Rigging Co.

10700 Bigge Avenue
San Leandro, CA 94577
Phone: (888) 337-BIGGE or (510) 638-8100
Fax: (510) 639-4053
Email: info@bigge.com
Web site: www.bigge.com

Brochure Reference: TC-DS-I-E-Superlift 3800-03/13



WORKS FOR YOU.™

